



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Reference No...... : WTF25F05114915E
Applicant..... : Mid Ocean Brands B.V.
Address..... : Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan,
Kowloon, Hong Kong.
Manufacturer : 114901
Address..... : ---
Product Name..... : Indoor garden 4 LED grow light
Model No...... : MO2702
Test specification..... : EN IEC 55015:2019+A11:2020
EN IEC 61547:2023
EN IEC 61000-3-2:2019+A1:2021+A2:2024
EN 61000-3-3:2013+A1:2019+A2:2021
Date of Receipt sample : 2025-05-23
Date of Test : 2025-05-23 to 2025-06-25
Date of Issue..... : 2025-06-30
Test Report Form No...... : WEL-55015A-01B
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,
Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun,
Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Leo Feng

Leo Feng

Approved by:

Danny Zhou

Danny Zhou



1 Test Summary

EMISSION				
Test Item	Test Standard		Class / Severity	Result
Conducted Disturbance for Wired Network Port, 9kHz to 30MHz	EN IEC 55015:2019+A11:2020		Clause 4.3.1	Pass
Conducted Disturbance for Local Wired Port,150kHz to 30MHz	EN IEC 55015:2019+A11:2020		Clause 4.4	N/A
Radiated Electromagnetic Disturbance, 9kHz to 30MHz	EN IEC 55015:2019+A11:2020		Clause 4.5.2	Pass
Radiated Disturbance, 30MHz to 1000MHz	EN IEC 55015:2019+A11:2020		Clause 4.5.3	Pass
Harmonic Current Emission	EN IEC 61000-3-2:2019+A1:2021+A2:2024		Class C	Pass***
Voltage Fluctuation and Flicker	EN 61000-3-3:2013+A1:2019+A2:2021		Clause 5	Pass**
IMMUNITY (EN IEC 61547:2023)				
Test Item	Test Method	Class / Severity	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	±4 Kv Contact ±8 Kv Air	B	Pass
Radio-Frequency Electromagnetic Fields (80MHz to 1GHz)	IEC 61000-4-3: 2006+A1+A2	3V/m, 80%, 1kHz, Amp. Mod.	A	Pass
Electrical Fast Transients (EFT)	IEC 61000-4-4:2012	AC ±1.0Kv DC ±0.5Kv	B	Pass
Surge	IEC 61000-4-5: 2014+A1	±1Kv D.M.† ±2Kv C.M.‡	C	Pass
Injected Currents, 0.15MHz to 80MHz	IEC 61000-4-6:2013	3Vr.m.s.(emf), 80%, 1kHz Amp. Mod.	A	Pass
Power-Frequency Magnetic Field	IEC 61000-4-8:2009	3A/m	A	N/A
Voltage Dips and Interruptions	IEC 61000-4-11: 2004+A1	0 % U _T * for 0.5per	B	Pass
		70 % U _T * for 10per	B	Pass

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

A.M Amplitude Modulation

† Differential Mode

‡ Common Mode

* U_T is the nominal supply voltage

** According to EN 61000-3-3 which states: "Pst and Plt evaluations are required only for lighting equipment which is likely to produce flicker; for example: disco lighting and automatically regulated equipment." Incandescent lamp luminaires with ratings less than or equal to 1 000 W and discharge and LED lamp luminaires with ratings less than or equal to 600 W, are deemed to comply with the dc, dmax and Tmax limits in this standard and are not required to be tested.

*** According to EN IEC 61000-3-2, no limit apply to the lighting equipment with a rated power less than but not equal to 5W. The actual measured power of model MO2702 less than 5W. Therefore, this equipment is deemed to fulfil this standard without any testing.



2 Contents

	Page
COVER PAGE	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION.....	5
3.1 GENERAL DESCRIPTION OF E.U.T.	5
3.2 DETAILS OF E.U.T.....	5
3.3 DESCRIPTION OF SUPPORT UNITS.....	5
3.4 STANDARDS APPLICABLE FOR TESTING	5
3.5 TEST FACILITY.....	6
3.6 SUBCONTRACTED.....	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
4 EQUIPMENT USED DURING TEST	7
4.1 SOFTWARE LIST	9
4.2 MEASUREMENT UNCERTAINTY	9
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4 DECISION RULE.....	10
5 EMISSION TEST RESULTS.....	11
5.1 CONDUCTED DISTURBANCE FOR WIRED NETWORK PORT, 9kHz TO 30MHz	11
5.1.1 E.U.T. Operation	11
5.1.2 Block Diagram of Test Setup	11
5.1.3 Measurement Data	11
5.1.4 Corrected Amplitude & Margin Calculation	12
5.1.5 Conducted Disturbance for Wired Network Port Test Data.....	12
5.2 RADIATED ELECTROMAGNETIC DISTURBANCE, 9kHz TO 30MHz	14
5.2.1 E.U.T. Operation	14
5.2.2 Block Diagram of Test Setup	14
5.2.3 Measurement Data	14
5.2.4 Radiated Electromagnetic Disturbance Test Data, 9kHz to 30MHz	15
5.3 RADIATED DISTURBANCE, 30MHz TO 1000MHz	18
5.3.1 E.U.T. Operation	18
5.3.2 Block Diagram of Test Setup	18
5.3.3 Measurement Data	18
5.3.4 Corrected Amplitude & Margin Calculation	19
5.3.5 Radiated Disturbance Test Data	19
6 IMMUNITY TEST RESULTS.....	21
6.1 PERFORMANCE CRITERIA	21
6.2 ELECTROSTATIC DISCHARGE (ESD).....	22
6.2.1 E.U.T. Operation	22
6.2.2 Block Diagram of Setup	22
6.2.3 Direct Discharge Test Results	23
6.2.4 Indirect Discharge Test Results.....	23
6.3 RADIO-FREQUENCY ELECTROMAGNETIC FIELDS, 80MHz TO 1GHz	24
6.3.1 E.U.T. Operation	24
6.3.2 Block Diagram of Setup	24
6.3.3 Test Results.....	25
6.4 ELECTRICAL FAST TRANSIENTS (EFT).....	26
6.4.1 E.U.T. Operation	26
6.4.2 Block Diagram of Setup	26
6.4.3 Test Results.....	27



6.5	SURGE.....	28
6.5.1	E.U.T. Operation.....	28
6.5.2	Block Diagram of Setup.....	28
6.5.3	Test Results.....	29
6.6	INJECTED CURRENTS IMMUNITY, 0.15MHZ TO 80MHZ.....	30
6.6.1	E.U.T. Operation.....	30
6.6.2	Block Diagram of Setup.....	30
6.6.3	Test Results.....	31
6.7	VOLTAGE DIPS AND INTERRUPTIONS.....	32
6.7.1	E.U.T. Operation.....	32
6.7.2	Block Diagram of Setup.....	32
6.7.3	Test Results.....	33
7	PHOTOGRAPHS – TEST SETUP	34
7.1	PHOTOGRAPH – CONDUCTED DISTURBANCE FOR WIRED NETWORK PORT TEST SETUP.....	34
7.2	PHOTOGRAPH – RADIATED ELECTROMAGNETIC DISTURBANCE TEST SETUP	34
7.3	PHOTOGRAPH – RADIATED DISTURBANCE TEST SETUP, 30MHZ TO 1000MHZ.....	35
7.4	PHOTOGRAPH – ESD IMMUNITY TEST SETUP	35
7.5	PHOTOGRAPH – RADIO-FREQUENCY ELECTROMAGNETIC FIELDS IMMUNITY TEST SETUP.....	36
7.6	PHOTOGRAPH – EFT IMMUNITY TEST SETUP	36
7.7	PHOTOGRAPH – SURGE IMMUNITY TEST SETUP.....	37
7.8	PHOTOGRAPH – INJECTED CURRENTS IMMUNITY TEST SETUP.....	37
7.9	PHOTOGRAPH – VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST SETUP.....	38
8	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	39
8.1	EUT – EXTERNAL VIEW.....	39

WALTEK



3 General Information

3.1 General Description of E.U.T.

Product Name : Indoor garden 4 LED grow light
Model No. : MO2702
Remark : ---

3.2 Details of E.U.T.

Technical Data : For light: DC 5V, 1.5W
For Adapter:
Input: 100-240V~, 50/60Hz, 0.5A; Output: DC 5V, 1A

3.3 Description of Support Units

The EUT has been tested as an independent unit. MO2702 is the test sample. The DV, LOOP&RE tests were performed in the condition of AC 245V/50Hz input. The other tests were performed in the condition of AC 230V/50Hz input.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN IEC 55015:2019+A11:2020	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN IEC 61547:2023	Equipment for general lighting purposes — EMC immunity requirements
EN IEC 61000-3-2:2019+A1:2021+A2:2024	Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase).
EN 61000-3-3:2013+A1:2019+A2:2021	Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.



3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.7 Abnormalities from Standard Conditions

None.



4 Equipment Used during Test

☐ Conducted Disturbance for Wired Network Port (9kHz to 30MHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102423	Valid
2.	LISN	R&S	ENV216	101343	Valid
3.	Cable 7	HUBER+SUHNER	CBL2-NN-6M	223NN624	Valid
4.	Switch	CD	RSU-A4 18G	RSUA4008	Valid
☒ Conducted Disturbance for Wired Network Port (9kHz to 30MHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESCI	101178	Valid
2.	LISN	R&S	ENV216	101215	Valid
3.	Cable 22	Times Microwave Systems	LMR195UF-BMNM-5.00M	---	Valid
4.	Switch	ESE	RSU/M2	---	Valid
☐ Conducted Disturbance for Wired Network Port (9kHz to 30MHz) 3#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102842	Valid
2.	LISN	R&S	ENV216	101542	Valid
3.	Cable 12	YIHENG	LMR195UF-NMNM-2.5	---	Valid
4.	Manual RF Switch	Top Precision	SW-2	RSU0402	Valid
☒ Radiated Electromagnetic Disturbance (9kHz to 30MHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESCI	101178	Valid
2.	Three Loops Antenna	SCHWARZBECK	HXYZ9170	000222	Valid
☐ Radiated Electromagnetic Disturbance (9kHz to 30MHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102842	Valid
2.	Three Loops Antenna	SCHWARZBECK	HXYZ 9170	9170-367	Valid
☒ Radiated Disturbance (30MHz to 1GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	---	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	Valid
4.	Cable 20	Times Microwave Systems	RG223-NMNM-10M	---	Valid
5.	Cable 21	Times Microwave Systems	RG223-NMNM-3M	---	Valid
6.	CDNE	SCHWARZBECK	CDNE M3	00083	Valid



7.	CDNE	SCHWARZBECK	CDNE M2	00092	Valid
☐ Radiated Disturbance (30MHz to 1GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	Valid
4.	Cable 14	YIHENG	LMR240UF-NMSM-7.5	---	Valid
5.	CDNE	SCHWARZBECK	CDNE M3	00083	Valid
6.	CDNE	SCHWARZBECK	CDNE M2	00092	Valid
☐ Harmonics and Flicker Measuring System					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Harmonics and Flicker Measuring System	YUANFANG	HFM-3000	V200	Valid
☒ ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	ESD Simulator	TESEQ	NSG437	521	Valid
☒ EFT & Voltage Dips and Interruptions					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMS test system	TESEQ	NSG3040	1858	Valid
2.	Step transformer	TESEQ	INA6501	206	Valid
3.	Coupling clamp	TESEQ	CDN8014	31405	Valid
☒ Surge					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Surge Simulator	TESEQ	NSG3060	1395	Valid
☒ Injected Currents					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Conducted Immunity test system	TESEQ	NSG4070	45345	Valid
2.	CDN	TESEQ	CDN M016	31586	Valid
3.	EM Clamp	TESEQ	KEMZ801	32362	Valid
4.	6dB Attenuator	TESEQ	ATN6075	32122	Valid
☒ Radio-frequency Electromagnetic Fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	RF Power Amplifier	MICOTOP	MPA-80-1000-250	MPA2405139	Valid
2.	RF Power Amplifier	MICOTOP	MPA-1000-6000-100	MPA2405140	Valid
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid



4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid
5.	Analog signal generator	RS	SMB100A	105566	Valid
6.	Power meter	RS	NRP6A	101133	Valid
7.	Power meter	RS	NRP6A	101134	Valid

☐: Not Used

☒: Used

4.1 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Disturbance 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Disturbance 2#)	FARATRONIC	EZ-CON	FARAD-3A1.1+
EMI Test Software (Conducted Disturbance 3#)	FARATRONIC	EZ-EMC	EMC-CON 3A1.1+
EMI Test Software (LOOP 1#)	FARATRONIC	EZ-CON	FARAD-3A1.1+
EMI Test Software (LOOP 2#)	FARATRONIC	EZ-EMC	EMC-CON 3A1.1+
EMI Test Software (Radiated Disturbance 1#)	FARATRONIC	EZ-EMC	RA-03A1-2
EMI Test Software (Radiated Disturbance 2#)	FARATRONIC	EZ-EMC	RA-03A1-2
Harmonics and Flicker Test Software	YUANFANG	HFM-3000	V2.00.147
Radiated Immunity Test Software	Chinese EMC	EMS	V1.0.0.0

4.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Disturbance	9kHz~150kHz	±2.6dB	(1)
Conducted Disturbance	150kHz~30MHz	±2.6dB	(1)
Radiated Electromagnetic Disturbance	9kHz~30MHz	±3.0dB	(1)
Radiated Disturbance	30MHz~1GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



4.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.	Serial No.
1.	/	/	/	/	/

4.4 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{LAB} is less than or equal to U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{LAB} is greater than U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit.

WALTEK



5 Emission Test Results

5.1 Conducted Disturbance for Wired Network Port, 9kHz to 30MHz

Test Requirement..... : EN IEC 55015 Clause 4.3.1

Test Method..... : EN IEC 55015 Clause 8

Test Result..... : Pass

Frequency Range..... : 9kHz to 30MHz

Class/Severity..... : Table 1 of EN IEC 55015

5.1.1 E.U.T. Operation

Operating Environment:

Temperature : 20.8°C

Humidity..... : 49.3%RH

Atmospheric Pressure : 101.2kPa


EUT Operation:

Input Voltage : AC 245V/50Hz

Operating Mode..... : Lighting mode

5.1.2 Block Diagram of Test Setup

The Conducted Disturbance for Wired Network Port test was performed in accordance with the EN IEC 55015.

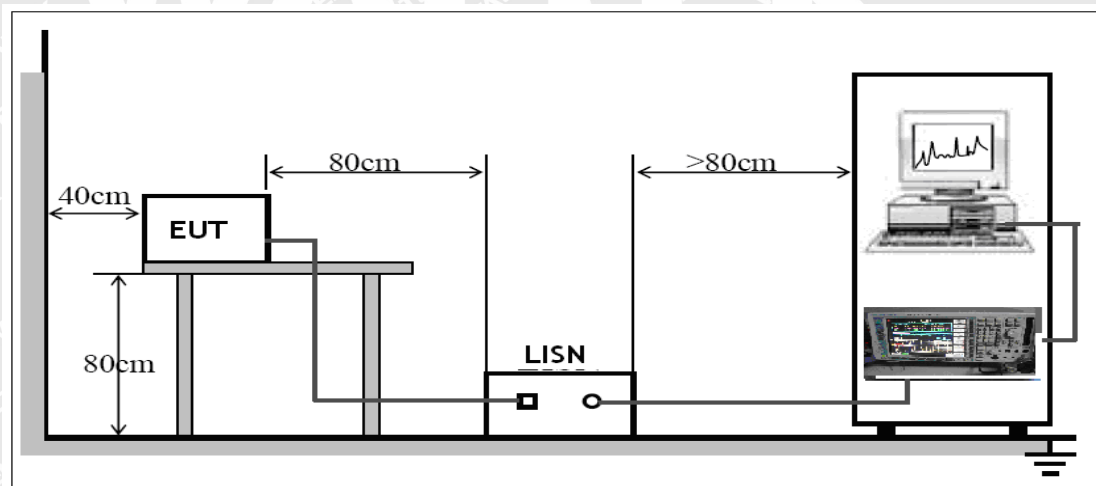

5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



5.1.4 Corrected Amplitude & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$


$$\text{Correct Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Measurement} - \text{Limit}$$


5.1.5 Conducted Disturbance for Wired Network Port Test Data

Live Line

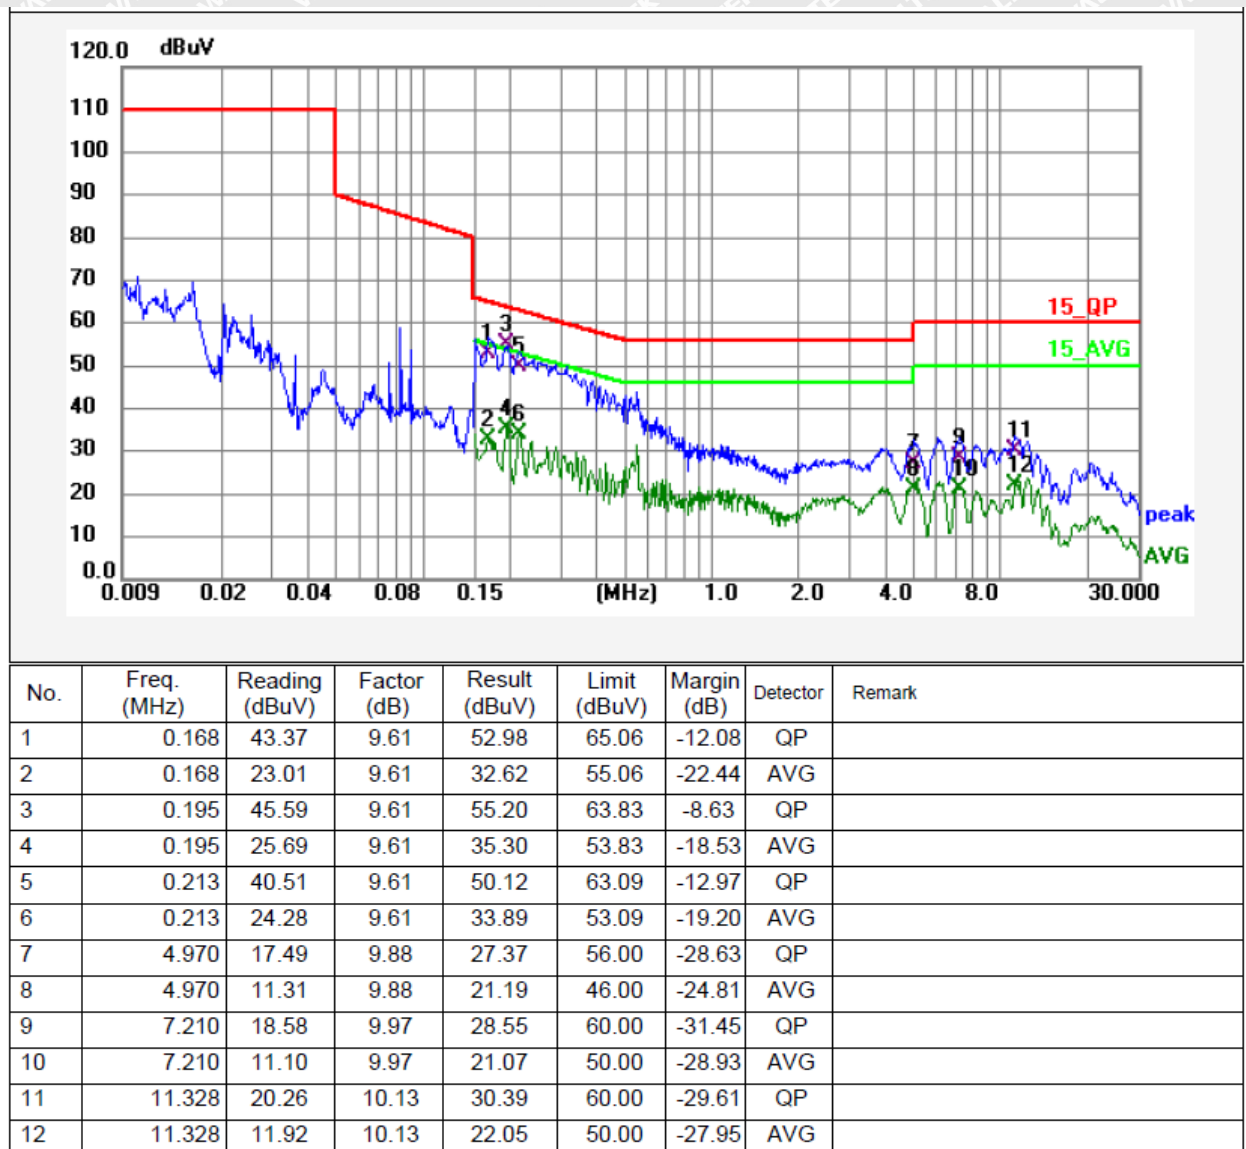



Neutral Line

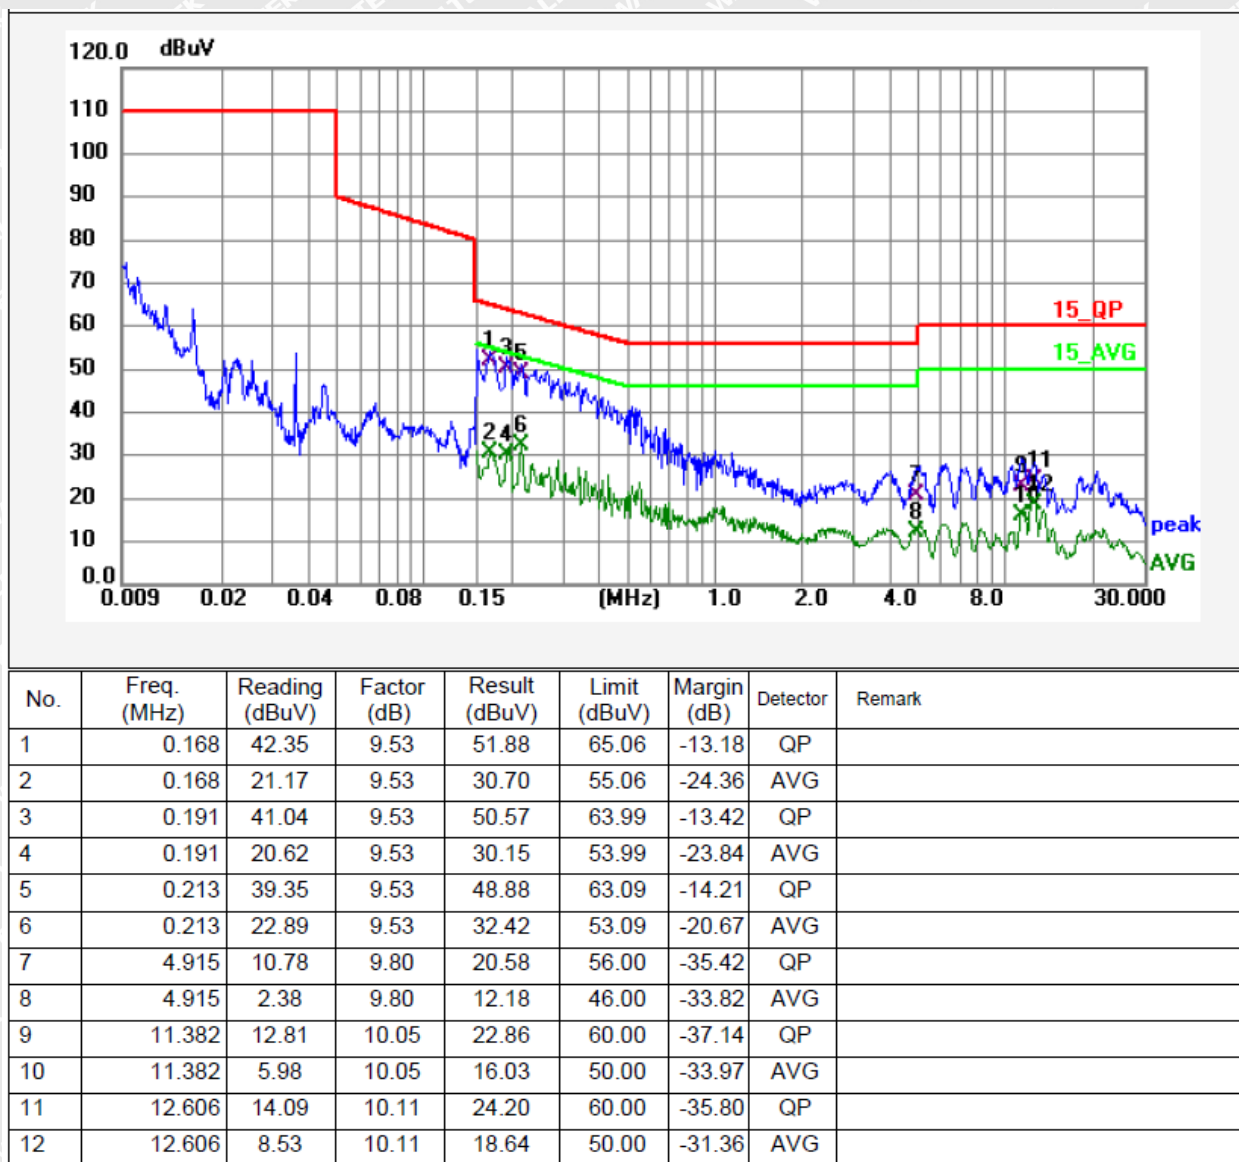



5.2 Radiated Electromagnetic Disturbance, 9kHz to 30MHz

Test Requirement.....	: EN IEC 55015 Clause 4.5.2
Test Method.....	: EN IEC 55015 Clause 9.3.2
Test Result.....	: Pass
Frequency Range.....	: 9kHz to 30MHz
Class/Severity.....	: Table 8 of EN IEC 55015

5.2.1 E.U.T. Operation

Operating Environment:


Temperature	: 20.8°C
Humidity.....	: 49.3%RH
Barometric Pressure.....	: 101.2kPa

EUT Operation:

Input Voltage	: AC 245V/50Hz
Operating Mode.....	: Lighting mode

5.2.2 Block Diagram of Test Setup

The Radiated Electromagnetic Disturbance (9kHz to 30MHz) test was performed in accordance with the EN IEC 55015.

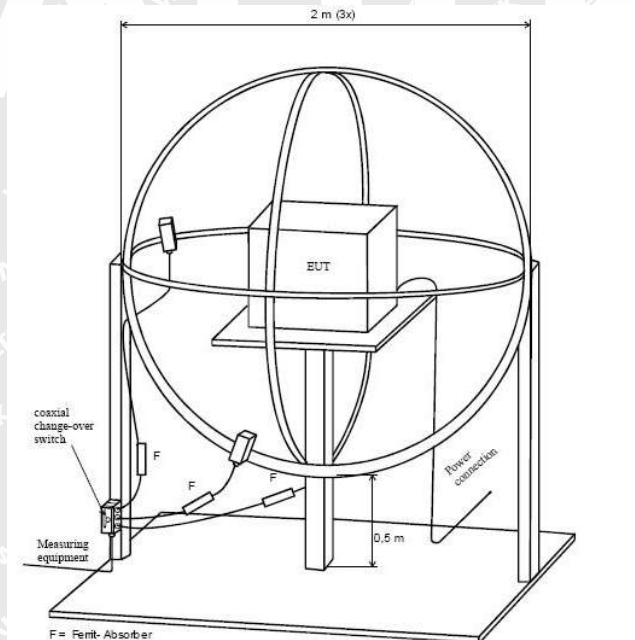


5.2.3 Measurement Data

According to the data in section 5.2.4, the EUT complied with the EN IEC 55015 standards.



5.2.4 Radiated Electromagnetic Disturbance Test Data, 9kHz to 30MHz


Loop X

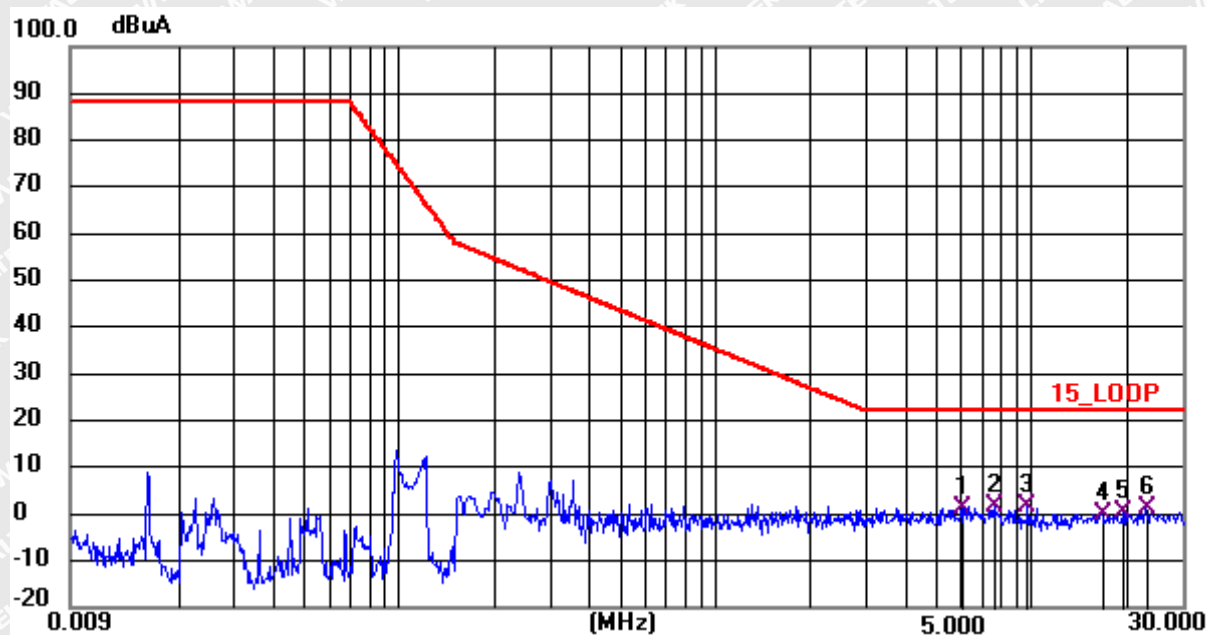

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Margin dB	Detector	Comment
1		6.0340	-0.14	1.30	1.16	22.00	-20.84	QP	
2	*	7.6420	0.29	1.40	1.69	22.00	-20.31	QP	
3		9.7620	-0.19	1.63	1.44	22.00	-20.56	QP	
4		16.6259	-1.50	1.40	-0.10	22.00	-22.10	QP	
5		19.3740	-0.79	1.28	0.49	22.00	-21.51	QP	
6		23.1299	0.08	1.01	1.09	22.00	-20.91	QP	




Loop Y

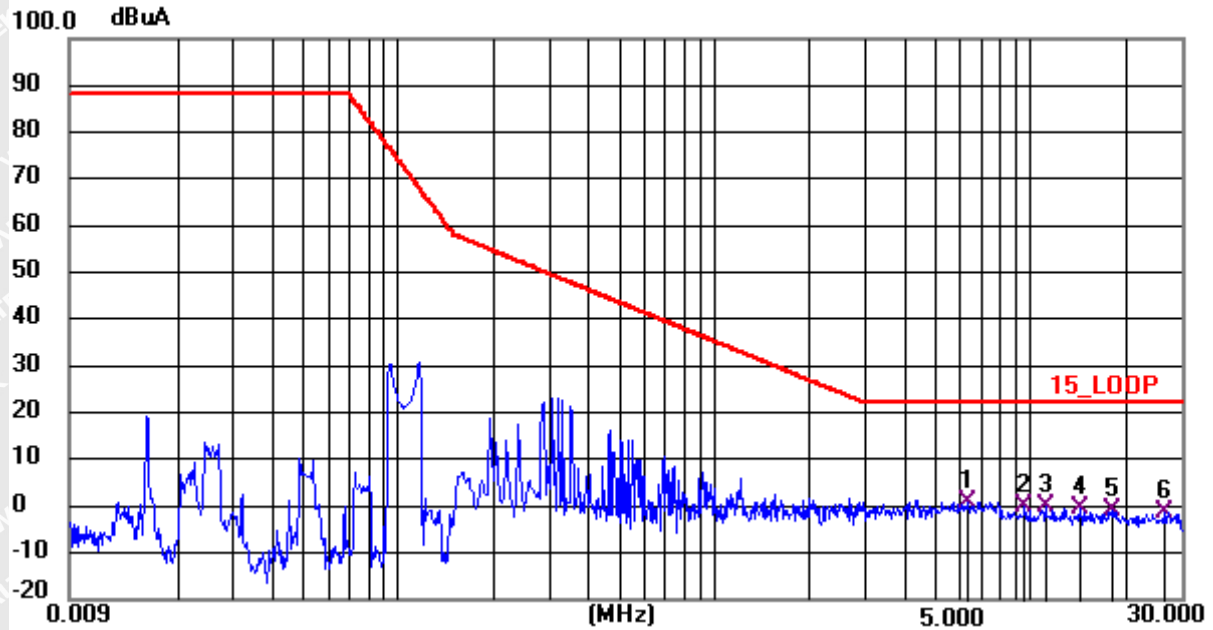

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Margin dB	Detector	Comment
1	*	6.3180	-0.39	1.37	0.98	22.00	-21.02	QP	
2		9.6180	-1.41	1.32	-0.09	22.00	-22.09	QP	
3		11.1980	-1.33	1.11	-0.22	22.00	-22.22	QP	
4		14.3140	-1.00	0.49	-0.51	22.00	-22.51	QP	
5		18.1420	-0.72	-0.27	-0.99	22.00	-22.99	QP	
6		26.3940	-0.10	-1.29	-1.39	22.00	-23.39	QP	



Loop Z

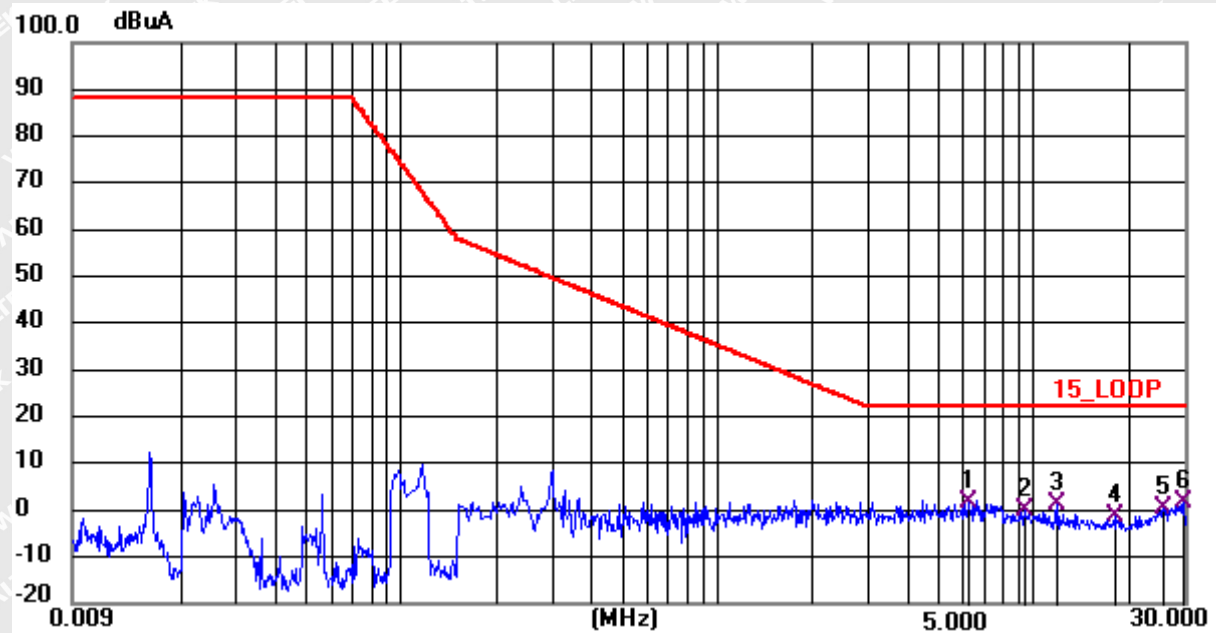

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Margin dB	Detector	Comment
1	*	6.2420	0.26	1.29	1.55	22.00	-20.45	QP	
2		9.4180	-1.24	1.17	-0.07	22.00	-22.07	QP	
3		11.8660	0.37	0.68	1.05	22.00	-20.95	QP	
4		18.2500	-0.27	-0.90	-1.17	22.00	-23.17	QP	
5		25.8620	-0.20	0.53	0.33	22.00	-21.67	QP	
6		29.7660	-0.26	1.77	1.51	22.00	-20.49	QP	



5.3 Radiated Disturbance, 30MHz to 1000MHz

Test Requirement.....	: EN IEC 55015 Clause 4.5.3
Test Method.....	: EN IEC 55015 Clause 9.3
Test Result.....	: Pass
Frequency Range.....	: 30MHz to 1000MHz
Class/Severity.....	: Table 10 of EN IEC 55015

5.3.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.4°C
Humidity.....	: 52.6%RH
Atmospheric Pressure.....	: 101.2kPa

EUT Operation:

Input Voltage	: AC 245V/50Hz
Operating Mode.....	: Lighting mode

5.3.2 Block Diagram of Test Setup

The Radiated Disturbance test was performed in the 3m Semi-Anechoic Chamber test site and accordance with CISPR16-2-3.

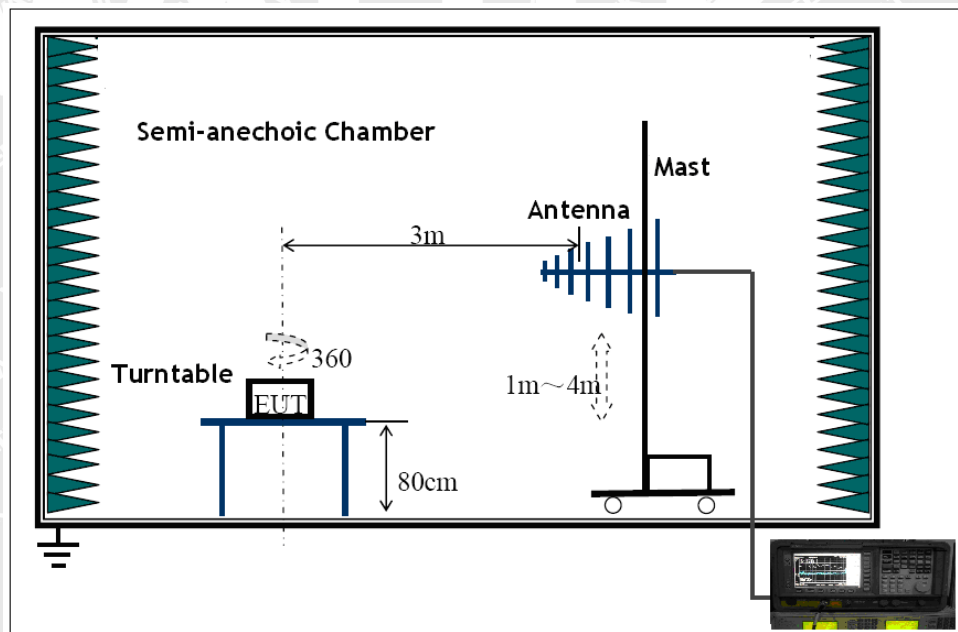

5.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for Horizontal & Vertical polarisation. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



5.3.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$


5.3.5 Radiated Disturbance Test Data

Vertical Polarization

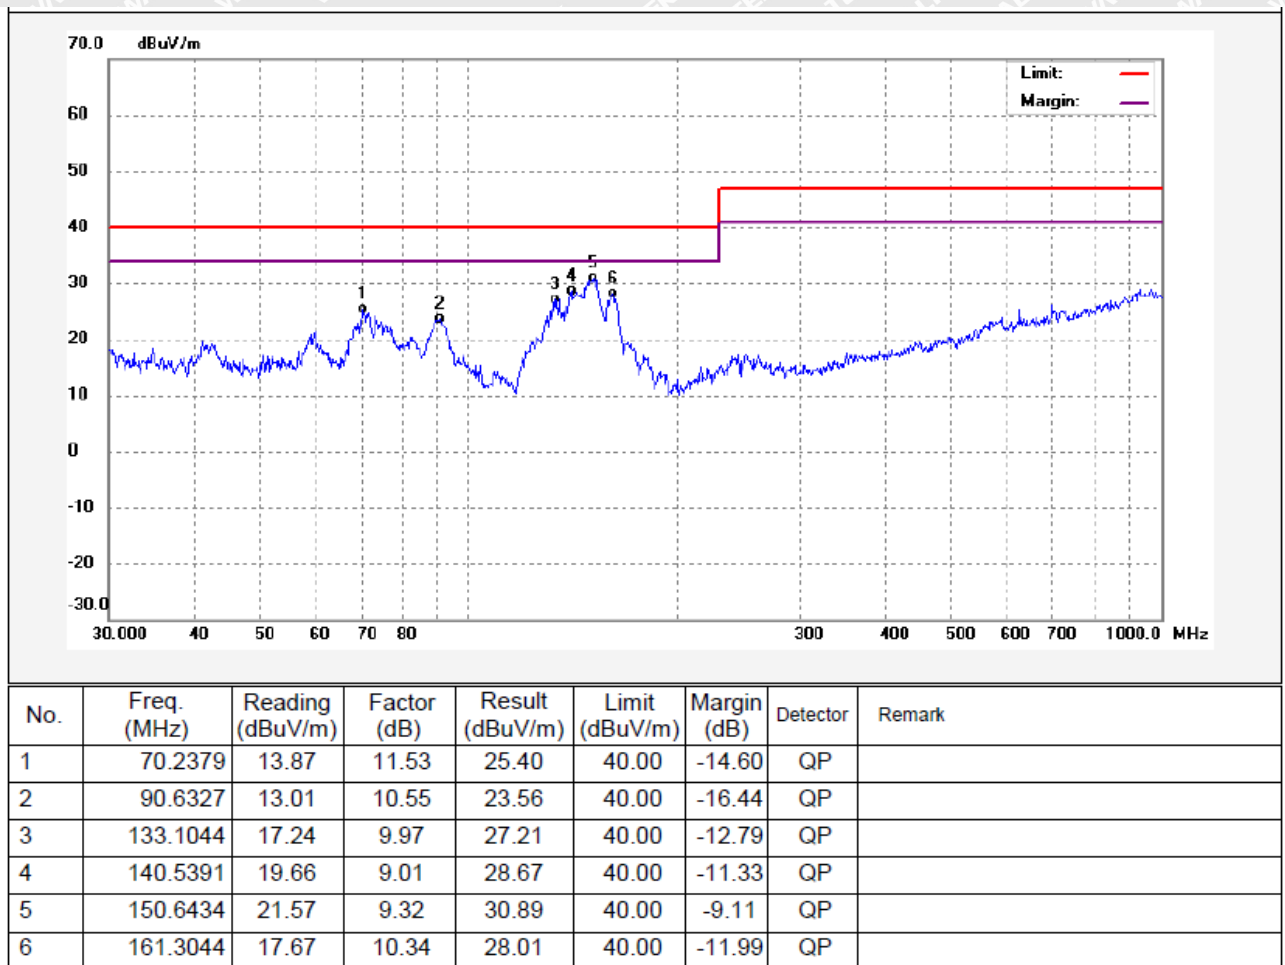



Horizontal Polarization

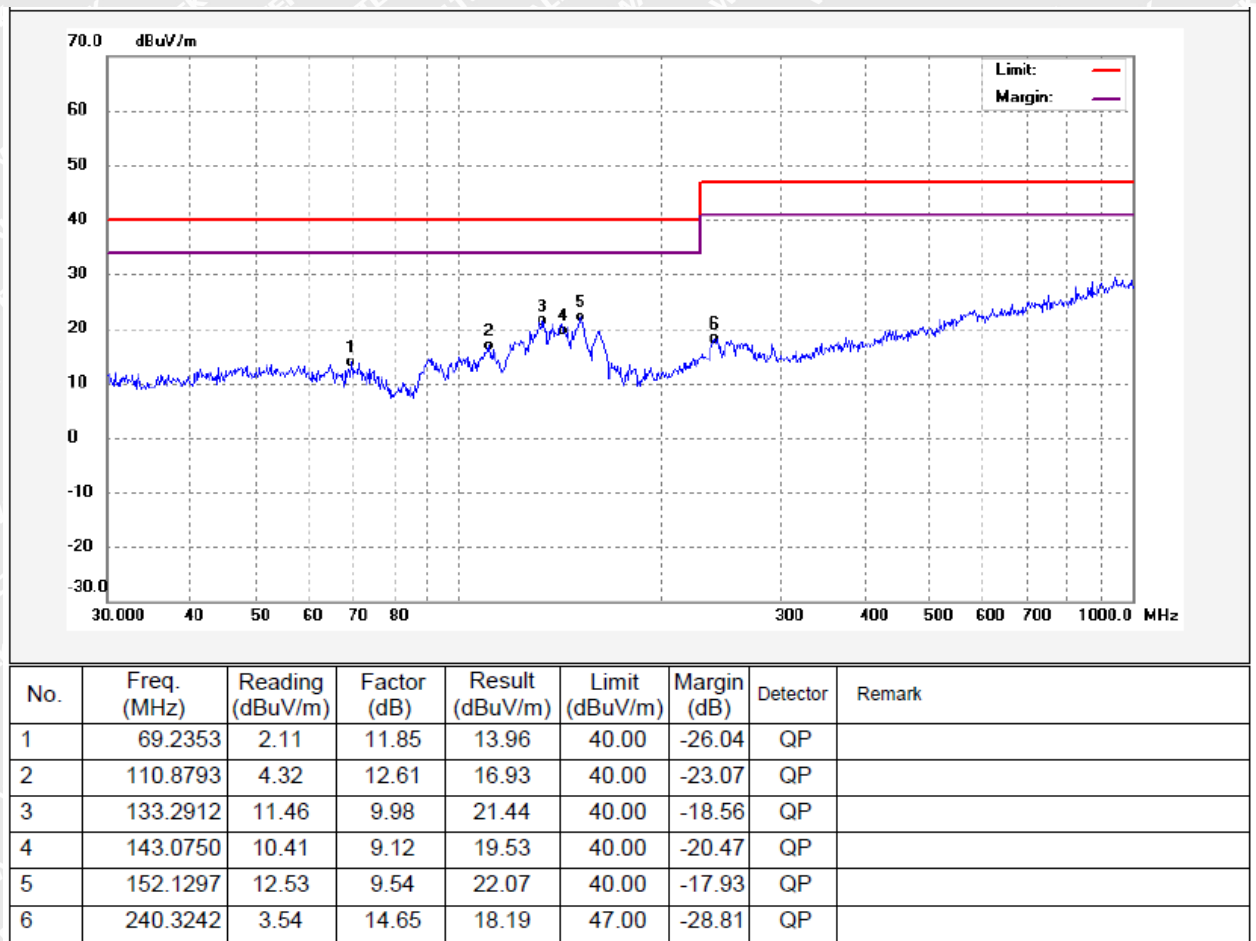



6 Immunity Test Results

6.1 Performance Criteria

Performance criterion A: During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: During and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.

WALTEK



6.2 Electrostatic Discharge (ESD)

Test Requirement.....	:	EN IEC 61547
Test Method.....	:	IEC 61000-4-2
Test Result.....	:	Pass
Discharge Impedance.....	:	330 Ω / 150pF
Discharge Voltage.....	:	Air Discharge: $\pm 8\text{kV}$ Contact Discharge: $\pm 4\text{kV}$ HCP & VCP: $\pm 4\text{kV}$
Polarity.....	:	Positive & Negative
Number of Discharge.....	:	Minimum 10 times at each test point
Discharge Mode.....	:	Single Discharge
Discharge Period.....	:	1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:


Temperature.....	:	22.8°C
Humidity.....	:	51.3%RH
Barometric Pressure.....	:	101.2kPa

EUT Operation:

Input Voltage.....	:	AC 230V/50Hz
Operating Mode.....	:	On mode

6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

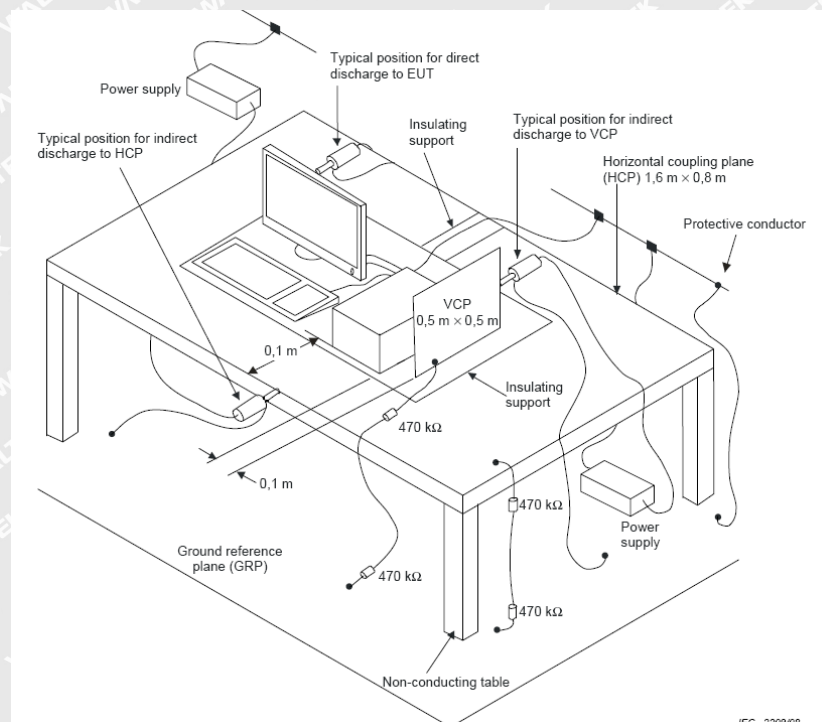



6.2.3 Direct Discharge Test Results

Observations:**Test points:**

1. All Exposed Surface & Seams;
2. All metallic part

Direct Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
±8	B	1	N/A	Pass*
±4	B	2	Pass*	N/A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

6.2.4 Indirect Discharge Test Results

Observations:**Test points:**

1. All sides.

Indirect Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
±4	B	1	Pass*	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.3 Radio-Frequency Electromagnetic Fields, 80MHz to 1GHz

Test Requirement.....	: EN IEC 61547
Test Method	: IEC 61000-4-3
Test Result	: Pass
Frequency Range	: 80MHz to 1GHz
Test level	: 3V/m
Modulation	: 80%, 1kHz Amplitude Modulation.
Face of EUT	: Front, Back, Left, Right
Antenna polarisation	: Horizontal & Vertical
Test Distance	: 3m

6.3.1 E.U.T. Operation

Operating Environment:


Temperature	: 23.3°C
Humidity	: 52.6%RH
Barometric Pressure.....	: 101.4kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: On mode

6.3.2 Block Diagram of Setup

The Radio-Frequency Electromagnetic Fields Immunity test was performed in accordance with the IEC 61000-4-3.

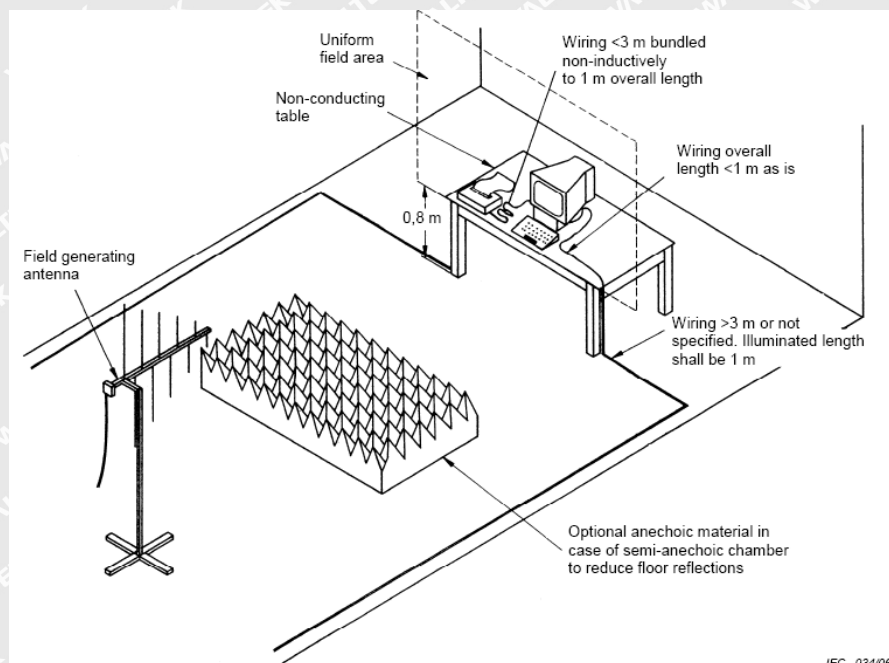



6.3.3 Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.4 Electrical Fast Transients (EFT)

Test Requirement	: EN IEC 61547
Test Method	: IEC 61000-4-4
Test Result	: Pass
Test Level	: 1.0kV on AC Mains
Polarity	: Positive & Negative
Repetition Frequency	: 5kHz
Burst Duration	: 15 ms $\pm$ 20 % at 5 kHz
Test Duration	: 2 minutes per level & polarity

6.4.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.6°C
Humidity	: 51.5%RH
Barometric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: On mode

6.4.2 Block Diagram of Setup

The Electrical Fast Transients Immunity test was performed in accordance with the IEC 61000-4-4.

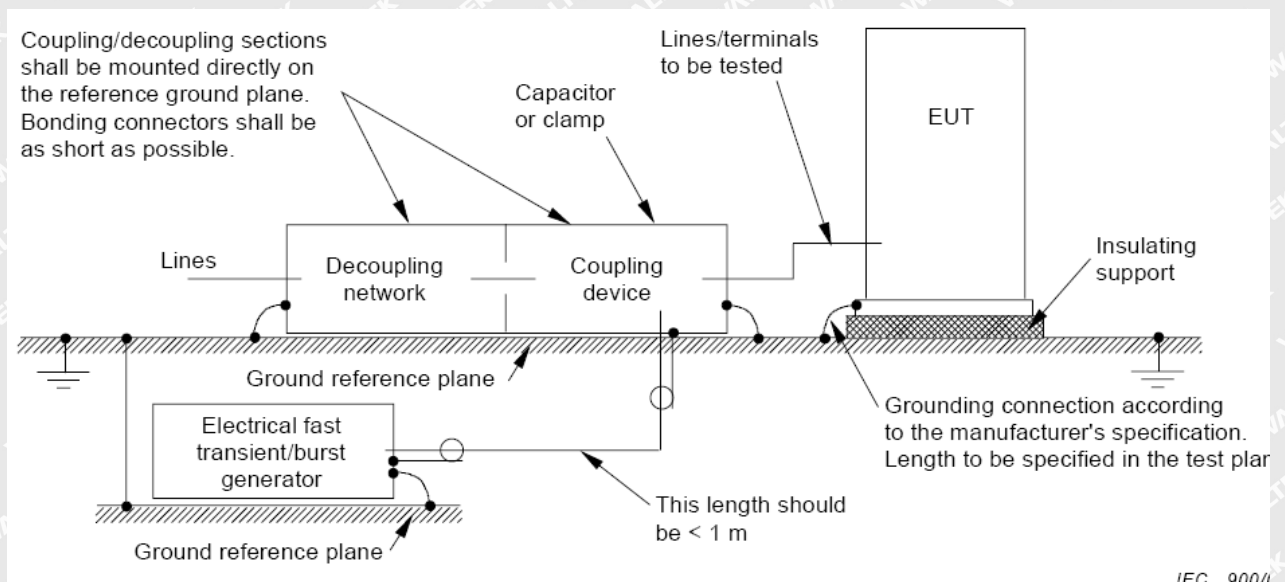



6.4.3 Test Results

Test Port	Test Level(kV)	Performance Criterion	Result
Line-Neutral	± 1.0	B	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.5 Surge

Test Requirement	: EN IEC 61547
Test Method	: IEC 61000-4-5
Test Result	: Pass
Test level	: Table 10 of EN IEC 61547
Interval	: 60s between each surge
No. of surges	: 5 positive at 90°, 5 negative at 270°.

6.5.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.4°C
Humidity	: 51.7%RH
Barometric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: On mode

6.5.2 Block Diagram of Setup

The Surge Immunity test was performed in accordance with the IEC 61000-4-5.

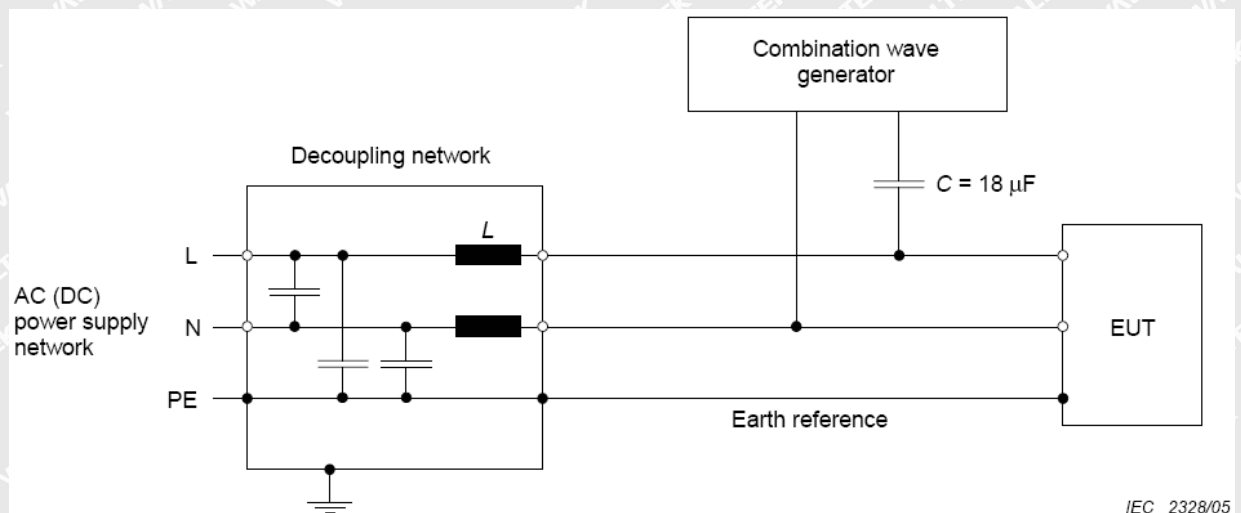



6.5.3 Test Results

Test Port	Applied Voltage (kV)	Performance criterion	Result
Between Phase And Phase	± 1	C	N/A
Between Live And Neutral	$\pm 0.5, \pm 1$	C	Pass*
Between Live And Earth	$\pm 0.5, \pm 1, \pm 2$	C	N/A
Between Neutral And Earth	$\pm 0.5, \pm 1, \pm 2$	C	N/A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.6 Injected Currents Immunity, 0.15MHz to 80MHz

Test Requirement.....	: EN IEC 61547
Test Method	: IEC 61000-4-6
Test Result	: Pass
Frequency Range	: 0.15MHz to 80MHz
Test level	: 3V r.m.s. (unmodulated emf into 150 Ω)
Modulation	: 80%, 1kHz Amplitude Modulation.

6.6.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.2°C
Humidity	: 51.9%RH
Barometric Pressure.....	: 101.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode.....	: On mode

6.6.2 Block Diagram of Setup

The Injected Currents Immunity test was performed in accordance with the IEC 61000-4-6.

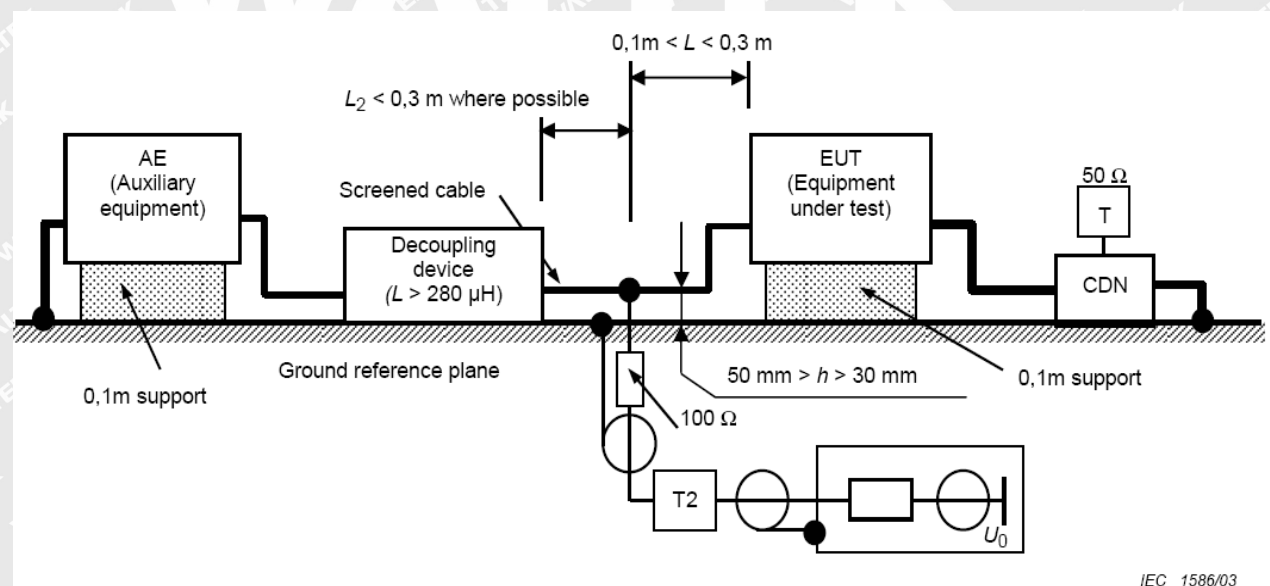

IEC 1586/03



6.6.3 Test Results

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Performance Criterion	Result
0.15MHz to 80MHz	2 Wire AC Supply Cables	3Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.7 Voltage Dips and Interruptions

Test Requirement.....	: EN IEC 61547
Test Method.....	: IEC 61000-4-11
Test Result.....	: Pass
Test Level(Voltage reduction) :	0%&70 % of U_T (Supply Voltage)
No. of Dips / Interruptions.....	: 1 per Level at 20ms intervals

6.7.1 E.U.T. Operation

Operating Environment:


Temperature	: 21.8°C
Humidity	: 52.1%RH
Barometric Pressure.....	: 101.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode.....	: On mode

6.7.2 Block Diagram of Setup

The Voltage Dips and Interruptions Immunity test was performed in accordance with the IEC 61000-4-11.

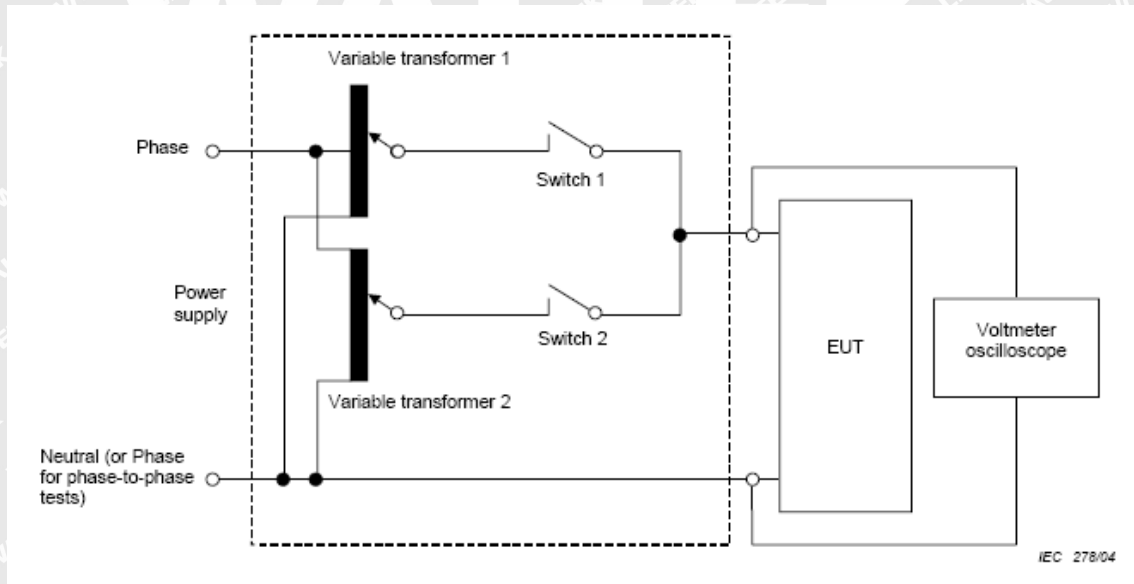



6.7.3 Test Results

Test Level in %U _T	Phase	Performance criterion	Duration	Result
0	0°	B	0.5	Pass*
	180°			Pass*
70	0°	B	10	Pass*
	180°			Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



7 Photographs – Test Setup

7.1 Photograph – Conducted Disturbance for Wired Network Port Test Setup



7.2 Photograph – Radiated Electromagnetic Disturbance Test Setup





7.3 Photograph – Radiated Disturbance Test Setup, 30MHz to 1000MHz



7.4 Photograph – ESD Immunity Test Setup





7.5 Photograph – Radio-Frequency Electromagnetic Fields Immunity Test Setup



7.6 Photograph – EFT Immunity Test Setup





7.7 Photograph – Surge Immunity Test Setup



7.8 Photograph – Injected Currents Immunity Test Setup







8 Photographs – Constructional Details

8.1 EUT – External View



===== End of Report =====

WALTEK