

Report No. : TSZ23080400-P01-R01

Page 1 of 3

Test Report

Client	:	
Address	:	

The following sample(s) and sample information was/were submitted and identified by/on the behalf of the client

Sample Name	:	Lithium-ion battery
Model/P.O. No.	:	Refer to the attachment
Manufacturer	:	
Received Date	:	Jul 02, 2025
Test Period	:	Jul 02, 2025~Jul 29, 2025
Test Requested	:	Regulation (EU) 2023/1542

Conclusion		
-	Lead(Pb), Cadmium(Cd), Mercury(Hg)	PASS

For Further Details, Please Refer To the Following Page(s)

Approved by: 

Date: Jul 29, 2025



Add: Building 1/4, No.2, Jinlong Road, Longgang District, Shenzhen, Guangdong, China.

Post Code: 518116

Tel: 0755-89457984

Website: www.tiansu.org

E-mail: tsjc@tiansu.org

Report No. : TSZ23080400-P01-R01

Page 2 of 3

Test Methods

Test Items	Test Method	Equipment
Lead(Pb), Cadmium(Cd)	IEC 62321-5:2013	ICP-OES
Mercury(Hg)	IEC 62321-4:2013+AMD1:2017	ICP-OES

Test Results

Test components	Test Item(s)	MDL (%)	Result(s) (%)	Limit (%)
Lithium-ion battery	Lead(Pb)	0.0005	N.D.	0.0100
	Cadmium(Cd)	0.0005	N.D.	0.0020
	Mercury(Hg)	0.0001	N.D.	0.0005

Note:


N.D.=Not Detected (<MDL); MDL=method detection limit.

According to regulation (EU) 2023/1542, All batteries containing more than 0.002 % cadmium or more than 0.004 % lead, shall be marked with the chemical symbol for the metal concerned: Cd or Pb.

The relevant chemical symbol indicating the heavy metal content shall be printed beneath the separate collection symbol and shall cover an area of at least one-quarter the size of that symbol.

Test Process:


Test Lead(Pb) ,Cadmium(Cd) , Mercury(Hg) concentration:

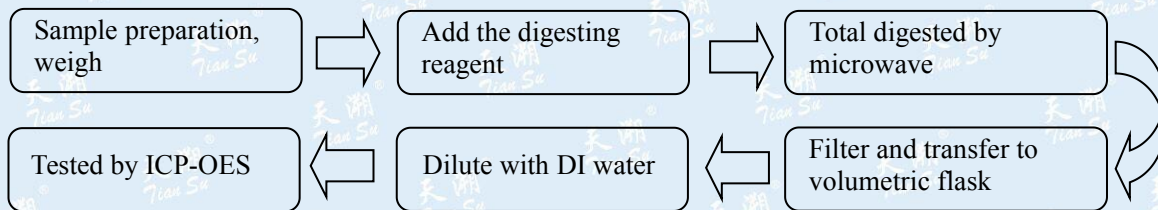

Report No. : TSZ23080400-P01-R01

Page 3 of 3

Photo of the sample

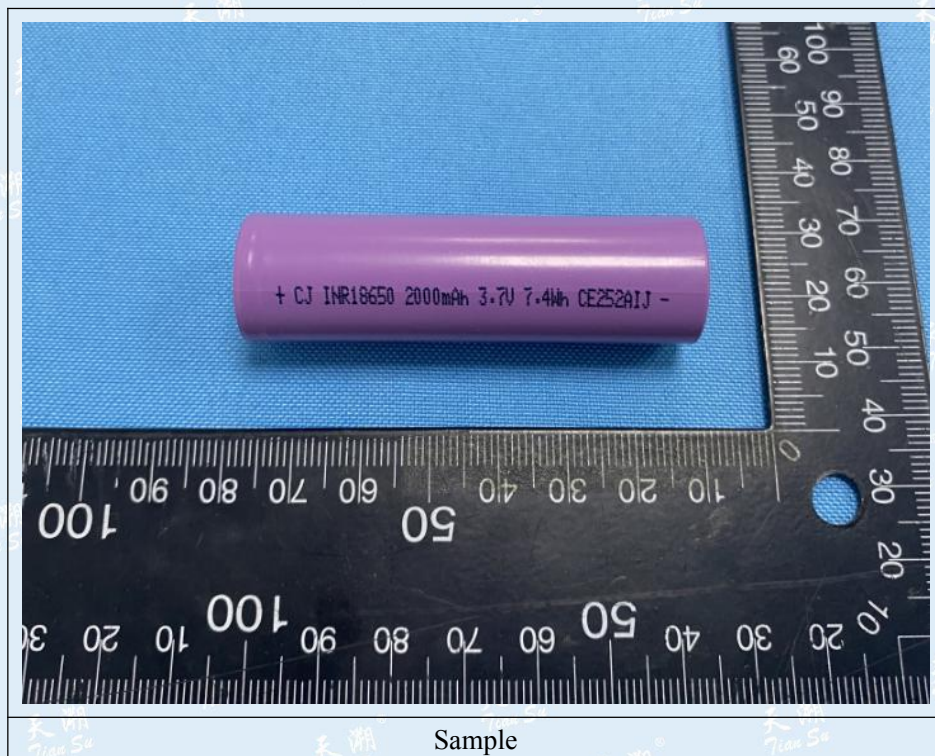

Sample

Attachment:

INR18650-2000mAh	INR18650-1500mAh	INR18650-2500mAh	INR21700-3000mAh
INR18650-800mAh	INR18650-1600mAh	INR18650-2600mAh	INR21700-3500mAh
INR18650-900mAh	INR18650-1700mAh	INR18650-2800mAh	INR21700-3800mAh
INR18650-1000mAh	INR18650-1800mAh	INR18650-3000mAh	INR21700-4000mAh
INR18650-1100mAh	INR18650-2100mAh	INR18650-3100mAh	INR21700-4500mAh
INR18650-1200mAh	INR18650-2200mAh	INR18650-3200mAh	INR21700-4800mAh
INR18650-1300mAh	INR18650-2400mAh	INR21700-2500mAh	INR21700-5000mAh

***** End of report *****

This report is invalid without the Special Seal of Tiansu. This report shall not be altered, increased or deleted. The results shown in this report refer only to the sample(s) tested.





Test Report issued under the responsibility of:



**TEST REPORT
IEC 62133-2**

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems

Report Number..... : 6168705.50

Date of issue..... : 2025-07-29
(Correction 1 at 2023-09-07)
(Correction 2 at 2024-07-21)

Total number of pages : 39 pages

Name of Testing Laboratory
preparing the Report : DEKRA Testing and Certification (Shanghai) Ltd.

Applicant's name :

Address..... :

Test specification:

Standard : IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

Test procedure : CB Scheme

Non-standard test method : N/A

TRF template used..... : IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No. : IEC62133_2C

Test Report Form(s) Originator : DEKRA Certification B.V.

Master TRF : Dated 2022-07-01

Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.



If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	Rechargeable Li-ion cell	
Trade Mark(s)	N/A	
Manufacturer		
Model/Type reference	INR21700-2500mAh, INR21700-3000mAh, INR21700-3500mAh, INR21700-3800mAh, INR21700-4000mAh, INR21700-4500mAh, INR21700-4800mAh, INR21700-5000mAh	
Ratings	Nominal Voltage: 3,7 V INR21700-2500mAh: Rated Capacity: 2500 mAh/ 9,25 Wh INR21700-3000mAh: Rated Capacity: 3000 mAh/ 11,10 Wh INR21700-3500mAh: Rated Capacity: 3500 mAh/ 12,95 Wh INR21700-4000mAh: Rated Capacity: 4000 mAh/ 14,80 Wh INR21700-5000mAh: Rated Capacity: 5000 mAh/ 18,50 Wh INR21700-3800mAh: Rated Capacity: 3800 mAh/ 14,06 Wh INR21700-4500mAh: Rated Capacity: 4500 mAh/ 16,65 Wh INR21700-4800mAh: Rated Capacity: 4800 mAh/ 17,76 Wh	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/> CB Testing Laboratory:	DEKRA Testing and Certification (Shanghai) Ltd.	
Testing location/ address	3F, #250 Jiangchangsan Road, Building 16, Headquarter Economy Park Shibe Hi-Tech Park, Jing'an District, Shanghai, 200436, China	
Tested by (name, function, signature)	Sunny Qi, Engineer	
Approved by (name, function, signature) ...	Alan Yang, Reviewer	
<input type="checkbox"/> Testing procedure: CTF Stage 1:		
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) ...		
<input type="checkbox"/> Testing procedure: CTF Stage 2:		
Testing location/ address		
Tested by (name + signature)		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) ...		
<input type="checkbox"/> Testing procedure: CTF Stage 3:		

<input type="checkbox"/>	Testing procedure: CTF Stage 4:		
Testing location/ address.....:			
Tested by (name, function, signature).....:			
Witnessed by (name, function, signature) .:			
Approved by (name, function, signature)...:			
Supervised by (name, function, signature) :			

List of Attachments (including a total number of pages in each attachment): -Attachment 1: National differences (3 pages) -Attachment 2: Photo documentation (3 page).	
Summary of testing:	
Tests performed (name of test and test clause): All applicable tests were performed on Cell INR21700-2500mAh, INR21700-3000mAh, INR21700-3500mAh, INR21700-4000mAh and INR21700-5000mAh. cl.5.6.2 Design recommendation; cl.7.1 Charging procedure for test purposes; cl.7.2.1 Continuous charging at constant voltage (cells); cl.7.3.1 External short circuit (cells); cl.7.3.3 Free fall; cl.7.3.4 Thermal abuse (cells); cl.7.3.5 Crush (cells); cl.7.3.7 Forced discharge (cells); cl.7.3.9 Design evaluation – Forced internal short circuit (cells) Tests are made with the number of cells specified in IEC 62133-2: 2017+A1 Table 1.	Testing location: DEKRA Testing and Certification (Shanghai) Ltd. 3F, #250 Jiangchangsan Road, Building 16, Headquarter Economy Park Shibei Hi-Tech Park, Jing'an District, Shanghai, 200436, China
Summary of compliance with National Differences (List of countries addressed): KR KR= Republic of Korea <input checked="" type="checkbox"/> The product fulfils the requirements of <u>KC 62133-2:2020</u>.	

Use of uncertainty of measurement for decisions on conformity (decision rule) :

☒ No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

☐ Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

CJ INR21700 2500mAh 3.7V 9.25Wh			
+			-
AAAF151IJ 000001 J1			

CJ INR21700 3000mAh 3.7V 11.1Wh			
+			-
AAAF121IJ 000001 J1			

CJ INR21700 3500mAh 3.7V 12.95Wh			
+			-
AAAF161IJ 000001 J1			

CJ INR21700 4000mAh 3.7V 14.8Wh			
+			-
AAAF071IJ 000001 J1			

CJ INR21700 5000mAh 3.7V 18.5Wh			
+			-
AAAF181IJ 000001 J1			

Label

Remark:

As the cell volume is too small, the following information is reflected in the cell packaging and specifications.

1. The cell designation is INR21700.
2. The manufacturer is
3. The warning is "Do not disassemble, puncture, crush, heat or burn".

Test item particulars.....:	Rechargeable Li-ion cell
Classification of installation and use.....:	N/A
Supply Connection	DC connector
Recommend charging method declared by the manufacturer	Charging the cell with INR21700-2500mAh: 1250mA, INR21700-3000mAh: 1500mA, INR21700-3500mAh: 1750mA, INR21700-4000mAh: 2000mA, INR21700-5000mAh: 2500mA constant current and 4,2 Vdc constant voltage until the current reduces to INR21700-2500mAh: 125mA, INR21700-3000mAh: 150mA, INR21700-3500mAh: 175mA, INR21700-4000mAh: 200mA, INR21700-5000mAh: 250mA at ambient 20 °C±5 °C
Discharge current (0,2 It A)	INR21700-2500mAh: 500mA, INR21700-3000mAh: 600mA, INR21700-3500mAh: 700mA, INR21700-4000mAh: 800mA, INR21700-5000mAh: 1000mA
Specified final voltage.....:	2,75 Vdc
Upper limit charging voltage per cell.....:	4,2 Vdc
Maximum charging current	INR21700-2500mAh: 2500mA, INR21700-3000mAh: 3000mA, INR21700-3500mAh: 3500mA, INR21700-4000mAh: 4000mA, INR21700-5000mAh: 5000mA
Charging temperature upper limit	50 °C
Charging temperature lower limit.....:	0 °C
Polymer cell electrolyte type.....:	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing.....:	
Date of receipt of test item : 2025-07-02	
Date (s) of performance of tests : 2025-07-02 to 2025-07-29	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC62133 02:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided :	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies) :

General product information and other remarks:

This cell is constructed with single Rechargeable Li-ion cell, and has overcharge, over-discharge, over current and short-circuits proof circuit.

All tests were conducted on models INR21700-2500mAh, INR21700-3000mAh, INR21700-3500mAh, INR21700-4000mAh, and INR21700-5000mAh. All models only have different model names and capacities, the rest are the same.

The main features of the cell in the cell are shown as below (clause 7.1.1):

Model	Rated capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
INR21700-2500mAh	2500mAh	3,7V	1250mA	1250mA	2500mA	7500mA	4,2V	2,75V
INR21700-3000mAh	3000mAh	3,7V	1500mA	1500mA	3000mA	9000mA	4,2V	2,75V
INR21700-3500mAh	3500mAh	3,7V	1750mA	1750mA	3500mA	10500mA	4,2V	2,75V
INR21700-4000mAh	4000mAh	3,7V	2000mA	2000mA	4000mA	12000mA	4,2V	2,75V
INR21700-5000mAh	5000mAh	3,7V	2500mA	2500mA	5000mA	15000mA	4,2V	2,75V

The main features of the cell in the cell are shown as below (clause 7.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
INR21700-2500mAh	4,2 Vdc	125 mA	0°C	50°C
INR21700-3000mAh	4,2 Vdc	150 mA	0°C	50°C
INR21700-3500mAh	4,2 Vdc	175 mA	0°C	50°C
INR21700-4000mAh	4,2 Vdc	200 mA	0°C	50°C
INR21700-5000mAh	4,2 Vdc	250 mA	0°C	50°C

Construction

INR21700-2500mAh:



INR21700-3000mAh



INR21700-3500mAh



INR21700-4000mAh



INR21700-5000mAh



Cell (Unit: mm)

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal surface exists.	N/A
	Insulation resistance (MΩ) :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearances and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Vent mechanism exists on the narrow side of the pouch cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented		N/A
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in manufacturer's specification.	P
5.5	Terminal contacts		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC Lead wire complied with the requirements.	P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance	Complied.	P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	General	Test cell only.	N/A
	Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region		N/A
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		N/A
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		N/A
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks	Single cell for pack.	N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage	Final voltage of battery: 2,75V, not exceed the final voltage specified by cell manufacturer.	P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse	Mechanical protection for cell connections and control circuits provided.	P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	Build-in batteries, mechanical protection for cells should be provided by end product.	N/A
	The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer	To be evaluated in final system.	N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests		N/A
5.7	Quality plan	Complied.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	ISO 9001: 2015 certificate provided.	P
5.8	Battery safety components	See TABLE: Critical components information	P

6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1	Not coin cells	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C \pm 5 °C		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		P
	When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	See clause 7.3.2.	P

7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C \pm 5 °C, using the method declared by the manufacturer	See page 6.	P
	Prior to charging, the battery has been discharged at 20 °C \pm 5 °C at a constant current of 0,2 It A down to a specified final voltage	See page 6.	P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method	Charge temperature specified by manufacturer: 0-50°C; 50°C used for upper limit tests; 0°C used for lower limit tests.	P
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)	Tested complied.	P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer	Charging for 7 days with INR21700-2500mAh: 1250mA, INR21700-3000mAh: 1500mA, INR21700-3500mAh: 1750mA, INR21700-4000mAh: 2000mA, INR21700-5000mAh: 2500mA.	P
	Results: no fire, no explosion, no leakage.....:	(See appended table 7.2.1)	P
7.2.2	Case stress at high ambient temperature (battery)		N/A
	Oven temperature (°C)		—
	Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells		N/A
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)	Tested complied.	P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: no fire, no explosion.....:	(See appended table 7.3.1)	P
7.3.2	External short-circuit (battery)		N/A
	The batteries were tested until one of the following occurred:		N/A
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test		N/A
	A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor		N/A
	Results: no fire, no explosion..... :		N/A
7.3.3	Free fall	Tested complied.	P
	Results: no fire, no explosion	No fire. No explosion	P
7.3.4	Thermal abuse (cells)	Tested complied.	P
	Oven temperature (°C) :	130°C	—
	Results: no fire, no explosion	No fire. No explosion	P
7.3.5	Crush (cells)	Tested complied.	P
	The crushing force was released upon:		P
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: no fire, no explosion..... :	(See appended table 7.3.5)	P
7.3.6	Over-charging of battery		N/A
	The supply voltage which is:		N/A
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		N/A
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		N/A
	Test was continued until the temperature of the outer casing:		N/A
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		N/A
	Results: no fire, no explosion..... :		N/A
7.3.7	Forced discharge (cells)	Tested complied.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer		P
	The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage		P
	- The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	- The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration		P
	Results: no fire, no explosion..... :	(See appended table 7.3.7)	P
7.3.8	Mechanical tests (batteries)		N/A
7.3.8.1	Vibration		N/A
	Results: no fire, no explosion, no rupture, no leakage or venting. :		N/A
7.3.8.2	Mechanical shock		N/A
	Results: no leakage, no venting, no rupture, no explosion and no fire :		N/A
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Tested complied.	P
	The cells complied with national requirement for :	France, Japan, Korea, Switzerland	—
	The pressing was stopped upon:		P
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	800N	P
	Results: no fire..... :	(See appended table 7.3.9)	P
8	INFORMATION FOR SAFETY		P
8.1	General		P
	Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications.	P
	Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users	Information for safety mentioned in manufacturer's specifications.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		N/A
8.2	Small cell and battery safety information		N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A
9	MARKING		P
9.1	Cell marking		P
	Cells are marked as specified in IEC 61960, except coin cells	See marking plate on page 5	P
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		P
9.2	Battery marking		N/A
	Batteries are marked as specified in IEC 61960, except for coin batteries		N/A
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity		N/A
	Batteries are marked with an appropriate caution statement		N/A
	- Terminals have clear polarity marking on the external surface of the battery, or		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		N/A
9.3	Caution for ingestion of small cells and batteries		N/A
	Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2	No coin batteries.	N/A
	Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package	Not intended for direct sale.	N/A
9.4	Other information		P
	The following information are marked on or supplied with the battery:		P
	- Storage and disposal instructions	Information for storage and disposal instructions mentioned in manufacturer's specifications.	P
	- Recommended charging instructions	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
10	PACKAGING AND TRANSPORT		P
	Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells.	N/A
ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P
A.1	General		P
A.2	Safety of lithium ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General		P
A.3.2	Upper limit charging voltage	4,2V.	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 0-50°C	P
A.4.3	High temperature range	Charging higher temperature declared is: 50°C	P
A.4.3.1	General		P
A.4.3.2	Explanation of safety viewpoint		P
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		P
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range	Charging lower temperature declared is: 0°C	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		P
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint	Battery specified final voltage 2,75V, not exceed the final voltage specified by cell manufacturer.	P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle in cylindrical cell		P
A.5.5.1	Insertion of nickel particle in winding core		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		P
A.5.6	Insertion of nickel particle in prismatic cell		N/A
A.6	Experimental procedure of the forced internal short-circuit test		P
A.6.1	Material and tools for preparation of nickel particle		P
A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P
ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		N/A
ANNEX C	RECOMMENDATIONS TO THE END-USERS		N/A
ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N/A
D.1	General	Not coin cells.	N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement		N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing	(See appended table D.2)	N/A
	Coin cells with an internal resistance less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A
ANNEX E	PACKAGING AND TRANSPORT		N/A
ANNEX F	COMPONENT STANDARDS REFERENCES		N/A

IEC 62133-2				
Clause	Requirement + Test		Result - Remark	Verdict
7.2.1	TABLE: Continuous charging at constant voltage (cells)			P
Sample no.	Recommended charging voltage Vc (Vdc)	Recommended charging current I _{rec} (A)	OCV before test (Vdc)	Results
INR21700-2500mAh				
Cell #1	4,2	1,25	4,2	P
Cell #2	4,2	1,25	4,2	P
Cell #3	4,2	1,25	4,2	P
Cell #4	4,2	1,25	4,2	P
Cell #5	4,2	1,25	4,2	P
INR21700-3000mAh				
Cell #54	4,2	1,50	4,2	P
Cell #55	4,2	1,50	4,2	P
Cell #56	4,2	1,50	4,2	P
Cell #57	4,2	1,50	4,2	P
Cell #58	4,2	1,50	4,2	P
INR21700-3500mAh				
Cell #107	4,2	1,75	4,2	P
Cell #108	4,2	1,75	4,2	P
Cell #109	4,2	1,75	4,2	P
Cell #110	4,2	1,75	4,2	P
Cell #111	4,2	1,75	4,2	P
INR21700-4000mAh				
Cell #160	4,2	2,00	4,2	P
Cell #161	4,2	2,00	4,2	P
Cell #162	4,2	2,00	4,2	P
Cell #163	4,2	2,00	4,2	P
Cell #164	4,2	2,00	4,2	P
INR21700-5000mAh				
Cell #213	4,2	2,50	4,2	P
Cell #214	4,2	2,50	4,2	P
Cell #215	4,2	2,50	4,2	P
Cell #216	4,2	2,50	4,2	P
Cell #217	4,2	2,50	4,2	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

- No fire or explosion
- No leakage

7.3.1	TABLE: External short-circuit (cell)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT , °C	Results	
INR21700-2500mAh						
Samples charged at charging temperature lower limit (50°C)						
Cell 6#	55,0	4,2	79	62,3	P	
Cell 7#	55,0	4,2	81	65,8	P	
Cell 8#	55,0	4,2	85	61,3	P	
Cell 9#	55,0	4,2	84	64,1	P	
Cell 10#	55,0	4,2	83	67,1	P	
Samples charged at charging temperature upper limit (0°C)						
Cell 11#	55,0	4,2	85	65,7	P	
Cell 12#	55,0	4,2	87	62,5	P	
Cell 13#	55,0	4,2	87	63,9	P	
Cell 14#	55,0	4,2	81	63,0	P	
Cell 15#	55,0	4,2	86	64,8	P	
INR21700-3000mAh						
Samples charged at charging temperature lower limit (50°C)						
Cell 59#	55,0	4,2	85	62,8	P	
Cell 60#	55,0	4,2	89	65,5	P	
Cell 61#	55,0	4,2	87	64,3	P	
Cell 62#	55,0	4,2	80	64,2	P	
Cell 63#	55,0	4,2	76	66,3	P	
Samples charged at charging temperature upper limit (0°C)						
Cell 64#	55,0	4,2	88	66,7	P	
Cell 65#	55,0	4,2	89	64,8	P	
Cell 66#	55,0	4,2	87	63,3	P	
Cell 67#	55,0	4,2	85	64,2	P	
Cell 68#	55,0	4,2	78	64,1	P	
INR21700-3500mAh						
Samples charged at charging temperature lower limit (50°C)						
Cell 112#	55,0	4,2	85	66,0	P	

IEC 62133-2					
Clause	Requirement + Test			Result - Remark	Verdict
Cell 113#	55,0	4,2	89	64,2	P
Cell 114#	55,0	4,2	79	63,8	P
Cell 115#	55,0	4,2	86	65,2	P
Cell 116#	55,0	4,2	80	64,5	P
Samples charged at charging temperature upper limit (0°C)					
Cell 117#	55,0	4,2	82	65,7	P
Cell 118#	55,0	4,2	85	64,8	P
Cell 119#	55,0	4,2	84	63,3	P
Cell 120#	55,0	4,2	89	62,3	P
Cell 121#	55,0	4,2	80	61,1	P
INR21700-4000mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 165#	55,0	4,2	74	66,3	P
Cell 166#	55,0	4,2	81	65,4	P
Cell 167#	55,0	4,2	87	65,3	P
Cell 168#	55,0	4,2	78	62,3	P
Cell 169#	55,0	4,2	80	64,5	P
Samples charged at charging temperature upper limit (0°C)					
Cell 170#	55,0	4,2	79	65,0	P
Cell 171#	55,0	4,2	83	64,4	P
Cell 172#	55,0	4,2	84	64,3	P
Cell 173#	55,0	4,2	82	62,3	P
Cell 174#	55,0	4,2	73	65,1	P
INR21700-5000mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 218#	55,0	4,2	80	65,5	P
Cell 219#	55,0	4,2	81	63,4	P
Cell 220#	55,0	4,2	87	64,5	P
Cell 221#	55,0	4,2	80	63,3	P
Cell 222#	55,0	4,2	80	65,4	P
Samples charged at charging temperature upper limit (0°C)					
Cell 223#	55,0	4,2	89	64,5	P
Cell 224#	55,0	4,2	82	63,8	P
Cell 225#	55,0	4,2	87	64,5	P
Cell 226#	55,0	4,2	70	64,7	P

IEC 62133-2					
Clause	Requirement + Test			Result - Remark	Verdict
Cell 227#	55,0	4,2	80	65,7	P
Supplementary information: - No fire or explosion					

7.3.2	TABLE: External short circuit (battery)					N/A
Sample No.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Component single fault condition	Results
Supplementary information: - No fire or explosion - Others (please explain)						

7.3.5	TABLE: Crush (cells)				P
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
INR21700-2500mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 34#	4,2	4,2	13,0	P	
Cell 35#	4,2	4,2	13,0	P	
Cell 36#	4,2	4,2	13,0	P	
Cell 37#	4,2	4,2	13,0	P	
Cell 38#	4,2	4,2	13,0	P	
Samples charged at charging temperature upper limit (0°C)					
Cell 29#	4,2	4,2	13,0	P	
Cell 30#	4,2	4,2	13,0	P	
Cell 31#	4,2	4,2	13,0	P	
Cell 32#	4,2	4,2	13,0	P	
Cell 33#	4,2	4,2	13,0	P	
INR21700-3000mAh					
Samples charged at charging temperature lower limit (50°C)					

IEC 62133-2				
Clause	Requirement + Test		Result - Remark	Verdict
Cell 87#	4,2	4,2	13,0	P
Cell 88#	4,2	4,2	13,0	P
Cell 89#	4,2	4,2	13,0	P
Cell 90#	4,2	4,2	13,0	P
Cell 91#	4,2	4,2	13,0	P
Samples charged at charging temperature upper limit (0°C)				
Cell 82#	4,2	4,2	13,0	P
Cell 83#	4,2	4,2	13,0	P
Cell 84#	4,2	4,2	13,0	P
Cell 85#	4,2	4,2	13,0	P
Cell 86#	4,2	4,2	13,0	P
INR21700-3500mAh				
Samples charged at charging temperature lower limit (50°C)				
Cell 140#	4,2	4,2	13,0	P
Cell 141#	4,2	4,2	13,0	P
Cell 142#	4,2	4,2	13,0	P
Cell 143#	4,2	4,2	13,0	P
Cell 144#	4,2	4,2	13,0	P
Samples charged at charging temperature upper limit (0°C)				
Cell 135#	4,2	4,2	13,0	P
Cell 136#	4,2	4,2	13,0	P
Cell 137#	4,2	4,2	13,0	P
Cell 138#	4,2	4,2	13,0	P
Cell 139#	4,2	4,2	13,0	P
INR21700-4000mAh				
Samples charged at charging temperature lower limit (50°C)				
Cell 193#	4,2	4,2	13,0	P
Cell 194#	4,2	4,2	13,0	P
Cell 195#	4,2	4,2	13,0	P
Cell 196#	4,2	4,2	13,0	P
Cell 197#	4,2	4,2	13,0	P
Samples charged at charging temperature upper limit (0°C)				
Cell 188#	4,2	4,2	13,0	P
Cell 189#	4,2	4,2	13,0	P
Cell 190#	4,2	4,2	13,0	P

IEC 62133-2				
Clause	Requirement + Test		Result - Remark	Verdict
Cell 191#	4,2	4,2	13,0	P
Cell 192#	4,2	4,2	13,0	P
INR21700-5000mAh				
Samples charged at charging temperature lower limit (50°C)				
Cell 246#	4,2	4,2	13,0	P
Cell 247#	4,2	4,2	13,0	P
Cell 248#	4,2	4,2	13,0	P
Cell 249#	4,2	4,2	13,0	P
Cell 250#	4,2	4,2	13,0	P
Samples charged at charging temperature upper limit (0°C)				
Cell 241#	4,2	4,2	13,0	P
Cell 242#	4,2	4,2	13,0	P
Cell 243#	4,2	4,2	13,0	P
Cell 244#	4,2	4,2	13,0	P
Cell 245#	4,2	4,2	13,0	P
Supplementary information:				
- No fire or explosion				

7.3.6	TABLE: Over-charging of battery				N/A
Constant charging current (A)					—
Supply voltage (Vdc)					—
Sample No.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
Supplementary information:					
- No fire or explosion					
- Others (please explain)					

7.3.7	TABLE: Forced discharge (cells)				P
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge I_r (A)	Lower limit discharge voltage (Vdc)	Results	

IEC 62133-2				
Clause	Requirement + Test		Result - Remark	Verdict
INR21700-2500mAh				
Cell 39#	2,76	2,5	2,75	P
Cell 40#	2,76	2,5	2,75	P
Cell 41#	2,76	2,5	2,75	P
Cell 42#	2,76	2,5	2,75	P
Cell 43#	2,76	2,5	2,75	P
INR21700-3000mAh				
Cell 92#	2,76	3,0	2,75	P
Cell 93#	2,76	3,0	2,75	P
Cell 94#	2,76	3,0	2,75	P
Cell 95#	2,76	3,0	2,75	P
Cell 96#	2,76	3,0	2,75	P
INR21700-3500mAh				
Cell 145#	2,76	3,5	2,75	P
Cell 146#	2,76	3,5	2,75	P
Cell 147#	2,76	3,5	2,75	P
Cell 148#	2,76	3,5	2,75	P
Cell 149#	2,76	3,5	2,75	P
INR21700-4000mAh				
Cell 198#	2,76	4,0	2,75	P
Cell 199#	2,76	4,0	2,75	P
Cell 200#	2,76	4,0	2,75	P
Cell 201#	2,76	4,0	2,75	P
Cell 202#	2,76	4,0	2,75	P
INR21700-5000mAh				
Cell 251#	2,76	5,0	2,75	P
Cell 252#	2,76	5,0	2,75	P
Cell 253#	2,76	5,0	2,75	P
Cell 254#	2,76	5,0	2,75	P
Cell 255#	2,76	5,0	2,75	P
Supplementary information:				
- No fire or explosion				

7.3.8.1	TABLE: Vibration	N/A
----------------	-------------------------	------------

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results

Supplementary information:

- No fire or explosion
- No rupture
- No leakage
- No venting
- Others (please explain)

7.3.8.2	TABLE: Mechanical shock	N/A
----------------	--------------------------------	------------

Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results

Supplementary information:

- No fire or explosion
- No rupture
- No leakage
- No venting
- Others (please explain)

7.3.9	TABLE: Forced internal short circuit (cells)	P
--------------	---	----------

Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results
INR21700-2500mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 49#	50	4,2	1	800	P
Cell 50#	50	4,2	1	800	P
Cell 51#	50	4,2	2	800	P
Cell 52#	50	4,2	1	800	P
Cell 53#	50	4,2	1	800	P
Samples charged at charging temperature upper limit (0°C)					
Cell 44#	0	4,2	2	800	P

IEC 62133-2					
Clause	Requirement + Test			Result - Remark	Verdict
Cell 45#	0	4,2	1	800	P
Cell 46#	0	4,2	1	800	P
Cell 47#	0	4,2	1	800	P
Cell 48#	0	4,2	2	800	P
INR21700-3000mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 102#	50	4,2	1	800	P
Cell 103#	50	4,2	1	800	P
Cell 104#	50	4,2	2	800	P
Cell 105#	50	4,2	1	800	P
Cell 106#	50	4,2	1	800	P
Samples charged at charging temperature upper limit (0°C)					
Cell 97#	0	4,2	2	800	P
Cell 98#	0	4,2	1	800	P
Cell 99#	0	4,2	1	800	P
Cell 100#	0	4,2	1	800	P
Cell 101#	0	4,2	2	800	P
INR21700-3500mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 155#	50	4,2	1	800	P
Cell 156#	50	4,2	1	800	P
Cell 157#	50	4,2	2	800	P
Cell 158#	50	4,2	1	800	P
Cell 159#	50	4,2	1	800	P
Samples charged at charging temperature upper limit (0°C)					
Cell 150#	0	4,2	2	800	P
Cell 151#	0	4,2	1	800	P
Cell 152#	0	4,2	1	800	P
Cell 153#	0	4,2	1	800	P
Cell 154#	0	4,2	2	800	P
INR21700-4000mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 208#	50	4,2	1	800	P
Cell 209#	50	4,2	1	800	P
Cell 210#	50	4,2	2	800	P

IEC 62133-2					
Clause	Requirement + Test			Result - Remark	Verdict
Cell 211#	50	4,2	1	800	P
Cell 212#	50	4,2	1	800	P
Samples charged at charging temperature upper limit (0°C)					
Cell 203#	0	4,2	2	800	P
Cell 204#	0	4,2	1	800	P
Cell 205#	0	4,2	1	800	P
Cell 206#	0	4,2	1	800	P
Cell 207#	0	4,2	2	800	P
INR21700-5000mAh					
Samples charged at charging temperature lower limit (50°C)					
Cell 261#	50	4,2	1	800	P
Cell 262#	50	4,2	1	800	P
Cell 263#	50	4,2	2	800	P
Cell 264#	50	4,2	1	800	P
Cell 265#	50	4,2	1	800	P
Samples charged at charging temperature upper limit (0°C)					
Cell 256#	0	4,2	2	800	P
Cell 257#	0	4,2	1	800	P
Cell 258#	0	4,2	1	800	P
Cell 259#	0	4,2	1	800	P
Cell 260#	0	4,2	2	800	P
Supplementary information: 1) Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. - No fire *:No location 2 in this cell.					

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾	
Supplementary information:					
1) Coin cells with an internal resistance less than or equal to 3 Ω, see test result on corresponding tables according to Clause 6 and Table 1.					

IEC 62133-2					
Clause	Requirement + Test		Result - Remark		Verdict
	TABLE: Critical components information				
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell		INR21700-2500mAh	2500mAh 3.7V 9.25Wh	IEC 62133-2:2017	Test with compliance
Cell		INR21700-3000mAh	3000mAh 3.7V 11.1Wh	IEC 62133-2:2017	Test with compliance
Cell		INR21700-3500mAh	3500mAh 3.7V 12.95Wh	IEC 62133-2:2017	Test with compliance
Cell		INR21700-4000mAh	4000mAh 3.7V 14.8Wh	IEC 62133-2:2017	Test with compliance
Cell		INR21700-5000mAh	5000mAh 3.7V 18.5Wh	IEC 62133-2:2017	Test with compliance
Cell		INR21700-3800mAh	3800mAh 3.7V 14.06Wh	IEC 62133-2:2017	Test with compliance
Cell		INR21700-4500mAh	4500mAh 3.7V 16.65Wh	IEC 62133-2:2017	Test with compliance
Cell		INR21700-4800mAh	4800mAh 3.7V 17.76Wh	IEC 62133-2:2017	Test with compliance
-Positive electrode		L8350A	NI+CO+Mn 8:1:1	IEC 62133-2:2017	Test with compliance
-Negative electrode		J-002	FC≥99.9%	IEC 62133-2:2017	Test with compliance
-Separator		66.5*0.016mm 38~46% ≥400gf	150~350sec/100m I	IEC 62133-2:2017	Test with compliance
-Electrolyte		JB-CJ5C04S	H2O<20ppm, HF≤50ppm	IEC 62133-2:2017	Test with compliance

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.			

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

Attachment 1

IEC62133_2A ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 62133-2 (REPUBLIC OF KOREA) NATIONAL DIFFERENCES (SECONDARY CELLS AND BATTERIES CONTAINING ALKALINE OR OTHER NON-ACID ELECTROLYTES - SAFETY REQUIREMENTS FOR PORTABLE SEALED SECONDARY LITHIUM CELLS, AND FOR BATTERIES MADE FROM THEM, FOR USE IN PORTABLE APPLICATIONS - PART 2: LITHIUM SYSTEMS)			
Differences according to.....: National standard KC62133-2(2020-07)			
TRF template used:: IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No.....: KR_ND_IEC62133_2A			
Attachment Originator: KTR			
Master Attachment: Dated 2020-09-25			
Copyright © 2020 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		P
7.3.6	Over-charging of battery		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

Attachment 1

IEC62133_2A ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
(Revision)	<p>[Add the bolded text]</p> <p>b) Test</p> <p>The test shall be carried out in an ambient temperature of 20 °C ± 5 °C. Each test battery shall be discharged at a constant current of 0,2 It A, to a final discharge voltage specified by the manufacturer. Sample batteries shall then be charged at a constant current of 2,0 It A, using a supply voltage which is:</p> <ul style="list-style-type: none"> • 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or • 1,2 times the upper limit charging voltage presented in Table A.1 per cell for series connected multi-cell batteries, and • sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached. <p><u>• In case the charging voltage specified by the manufacturer is higher than the overcharge test voltage, the maximum charging voltage specified by manufacturer should be applied with 2.0 ItA,</u></p> <p><u>(e.g., quick charging power bank, etc.)</u></p>	See the main report 7.3.6 Test	P
	<p>[Replace to the following statement]</p> <p>c) Acceptance criteria</p> <p>Overcharging exceeding to the limits specified by the manufacturer should not result in fire or explosion.</p>		P
Annex G	Definition for shape and materials of outer case for cell		—

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

Attachment 1

IEC62133_2A ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
(Addition)	<p>G.1 General Annex G provides definitions for shape and materials of outer case for cell</p> <p>G.2 Shape of outer case for cell G.2.1 Cylindrical cell Cell with a cylindrical shape in which the overall height is equal to or greater than diameter.</p> <p>G.2.2 Prismatic cell Cell having the shape of a parallelepiped whose faces are rectangular</p> <p>G.3 Materials of outer case for cell G.3.1 Soft case Non-metallic outer case or container for cell</p> <p>G.3.2 Hard case Metallic outer case or container for cell.</p>	<p>(Shape of outer cases) <input checked="" type="checkbox"/> Cylindrical <input type="checkbox"/> Prismatic</p> <p>(Materials of outer cases) <input checked="" type="checkbox"/> Hard <input type="checkbox"/> Soft</p>	—
Annex H	Calculation method of the volumetric energy density for cell		—
(Addition)	<p>Annex H provide a calculation method of the volumetric energy density for cell in use of smart phone, tablet, notebook.</p> <p>H.1 General Unless otherwise stated in the Annex E, the dimensions for calculation are based on these for cell before shipment and the volumetric energy density shall be calculated with a maximum values specified by manufacturer. If the specification for cell can't be provided a dimension for calculation, the manufacturer's other documentation shall be provided to demonstrate compliance for its calculation.</p>	<p>INR21700-2500mAh: 344,2Wh / L</p> <p>INR21700-3000mAh: 413,1Wh / L</p> <p>INR21700-3500mAh: 482,0Wh / L</p> <p>INR21700-4000mAh: 550,8Wh / L</p> <p>INR21700-5000mAh: 688,5Wh / L</p>	—

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

Attachment 1

IEC62133_2A ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>H.2 Calculation Method</p> <p>L : Length (max.) of cell (including terrace) W : Width (max.) of cell T : Thickness (max.) when shipping charge (For reference, Please Exclude the dimension of any tape that is attached to cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$ <p>[H.1 – Prismatic cell using soft case]</p> <p>L : Length (max.) of cell W : Width (max.) of cell T : Thickness when shipping charge (For reference, Please Exclude the dimension of any tape that is attached to cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$ <p>[H.2 – Prismatic cell using hard case]</p> <p>D : Diameter (max.) of cell L : Length (max.) of cell (According to shape of cell at shipping, The dimension of tube for cell may be included in overall dimension of cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{3.14159 \times \frac{\text{Diameter (D)}^2}{4} \times \text{Length(L)}}$ <p>[H.3 – Cylindrical cell using hard case]</p>		

Attachment 2 : Photo Documentation



Figure 1 Cell view(INR21700-2500mAh)



Figure 2 Cell view(INR21700-3000mAh)

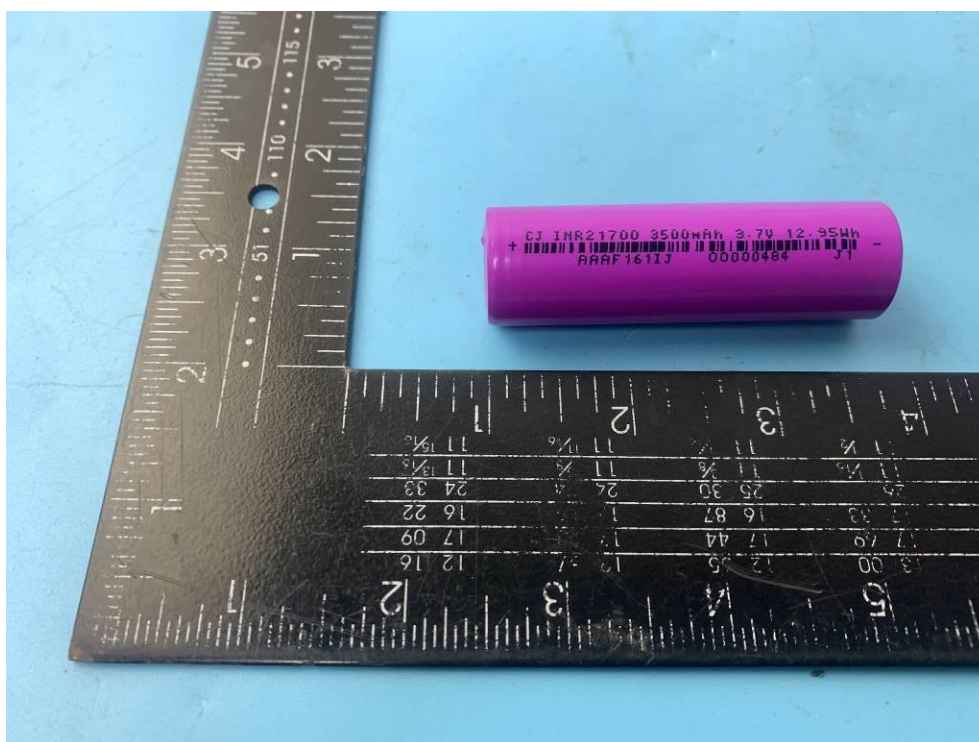


Figure 3 Cell view(INR21700-3500mAh)



Figure 4 Cell view(INR21700-4000mAh)



Figure 5 Cell view(INR21700-5000mAh)

-- End of Report --