

# Test Report

**Report No.** : 1815C40351712801

---

**Applicant** :

**Address** :

---

**Product Name** : Lithium ion Rechargeable Cell

---

**Report Date** : 2024.12.25

---

**Shenzhen Anbotek Compliance Laboratory Limited**



# Test Report

Report No.: 1815C40351712801

Page 2 of 5

Applicant :

Address :

The submitted sample and sample information was/were submitted and identified by/on the behalf of the client

Sample Name : Lithium ion Rechargeable Cell

Test Model No. : 18650 1200mAh

Reference Model No. : 18650 800mAh, 18650 600mAh

Trade Mark : XS

Sample Received Date : 2024.12.10

Testing Period : 2024.12.10~2024.12.17

Test Requested :

As specified by client, in accordance with the Regulation (EU) 2023/1542, to test the Lead(Pb), Cadmium(Cd) and Mercury(Hg) in the submitted sample(s).

Conclusion

PASS

## Test Method:

| Tested Item(s)        | Test Method                | Measured Equipment(s) |
|-----------------------|----------------------------|-----------------------|
| Lead(Pb)/ Cadmium(Cd) | IEC 62321-5:2013           | ICP-OES               |
| Mercury(Hg)           | IEC 62321-4:2013+AMD1:2017 | ICP-OES               |

Test Result(s): Please refer to the following page(s).

Edited by Lindy.chen Reviewed by zoe zheng Authorized Signatory Jurkin

# Test Report

Report No.: 1815C40351712801

Page 3 of 5

**Tested Sample/Part Description:**

Battery

**Test Result(s):**

| Tested Item(s) | Result (%) | MDL (%) | Limit (%) |
|----------------|------------|---------|-----------|
| Lead (Pb)      | N.D.       | 0.0002  | 0.01      |
| Cadmium (Cd)   | N.D.       | 0.0002  | 0.002     |
| Mercury (Hg)   | N.D.       | 0.00005 | 0.0005    |

**Note:**

- MDL = Method Detection Limit
- N.D. = Not Detected (<MDL)
- %= Percentage by weight
- Results shown are of total weight of the battery sample.

**Remark:**

According to Regulation (EU) 2023/1542:

-Annex I-Restriction on substances:

1. Batteries, whether or not incorporated into appliances, light means of transport or other vehicles, shall not contain more than 0.0005% of mercury (expressed as mercury metal) by weight.
2. Portable batteries, whether or not incorporated into appliances, light means of transport or other vehicles, shall not contain more than 0.002% of cadmium (expressed as cadmium metal) by weight.
3. (1):From 18 August 2024, portable batteries, whether or not incorporated into appliances, shall not contain more than 0.01% of lead (expressed as lead metal) by weight.  
(2):The restriction set out in point (1) shall not apply to portable zinc-air button cells until 18 August 2028.

-All batteries containing more than 0.002% cadmium or more than 0.004% lead, shall be marked with the chemical symbol for the metal concerned: Cd or Pb.


# Test Report

Report No.: 1815C40351712801


Page 4 of 5

## Test Process:

### ◆ IEC 62321-5:2013

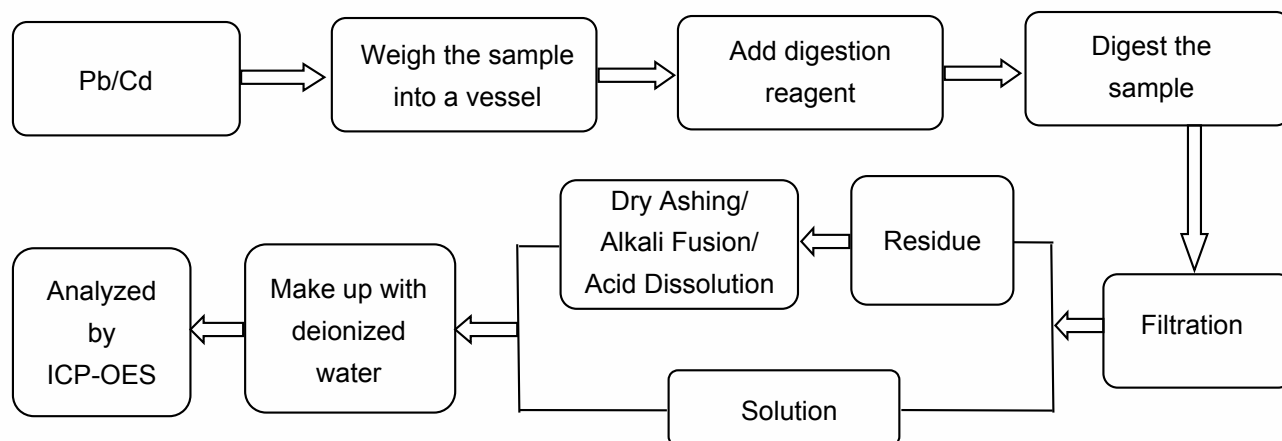

### ◆ IEC 62321-4:2013+AMD1:2017

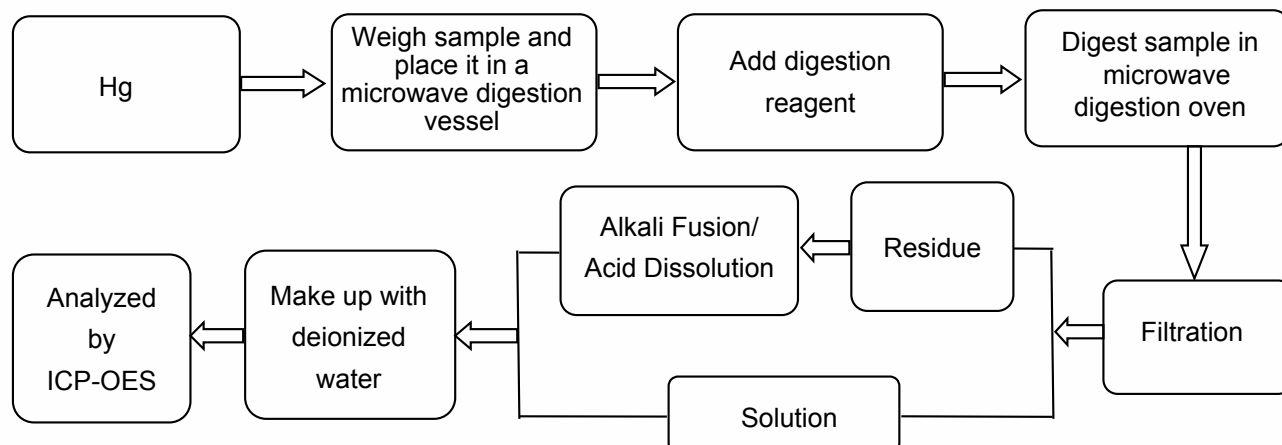


# Test Report

Report No.: 1815C40351712801

Page 5 of 5

## Photograph of Sample

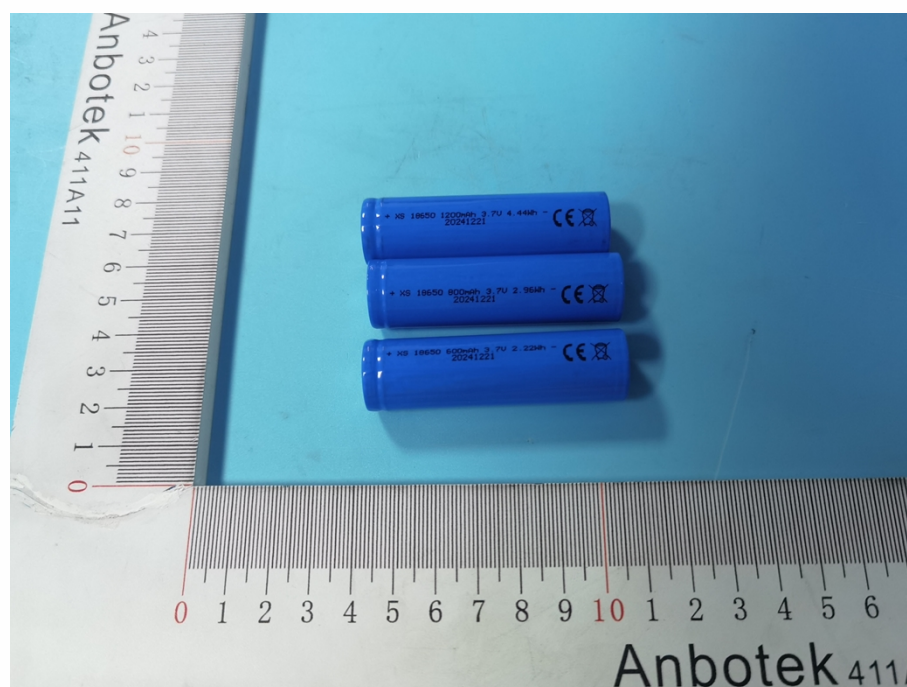

\*\*\*\*\* End of Report \*\*\*\*\*

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of Anbotek, this report can't be reproduced except in full.

**Shenzhen Anbotek Compliance Laboratory Limited**

AB-RHS-03-c

Address: 401, 402, Building A, Hourui No.3 Industrial Zone, No. 2 Kaicheng Road,  
Hourui Community, Hangcheng Street, Baoan District, Shenzhen, Guangdong, China  
Tel: (86) 755-26066126 Email: service@anbotek.com

Hotline  
400-003-0500  
www.anbotek.com



# APPLICATION FOR IEC TEST REPORT

**Client Name** :

**Address** :

**Product Name** : Lithium ion Rechargeable Cell

**Date** : 2024.12.27




**Shenzhen Anbotek Compliance Laboratory Limited**



|   |  |
|---|--|
| <b>TEST REPORT</b>  |  |
| <b>IEC 62133-2:2017+A1:2021</b>   |  |
| <b>Secondary cells and batteries containing alkaline or other non-acid electrolytes —<br/>Safety requirements for portable sealed secondary cells, and for batteries made from them, for<br/>use in portable applications</b> |  |
| <b>Report</b>   |  |
| Reference No.....   | 182715C400722101-M1  |
| Compiled by (+ signature).....  | Shelly Mo<br>.....   |
| Approved by (+ signature) .....   | Fannie Zhu<br>.....  |
| Date of issue .....   | 2024.12.27   |
| Contents .....  | 21 pages (including 1 page of photos)  |
| <b>Testing laboratory</b>   |  |
| Name .....  | Shenzhen Anbotek Compliance Laboratory Limited   |
| Address.....  | 401, 402, Building A, Hourui No.3 Industrial Zone, No.2 Kaicheng Road, Hourui Community, Hangcheng Street, Baoan District, Shenzhen, Guangdong, China. |
| Testing location .....  | Shenzhen Anbotek Compliance Laboratory Limited   |
| <b>Client</b>   |  |
| Name .....  |  |
| Address.....  |  |
| <b>Test specification</b>   |  |
| Standard .....  | IEC 62133-2:2017+A1:2021   |
| Test procedure .....  | Test report  |
| Non-standard test method .....  | N.A.   |
| <b>Test item</b>  |  |
| Description .....   | Lithium ion Rechargeable Cell  |
| Trademark .....   | N.A.   |
| Model and/or type reference .....   | 18650  |
| Manufacturer.....   | Same as client   |
| Address.....  | Same as client   |
| Factory.....  | Same as client   |
| Address.....  | Same as client   |
| Rating(s) .....   | 3.7V, 800mAh, 2.96Wh   |

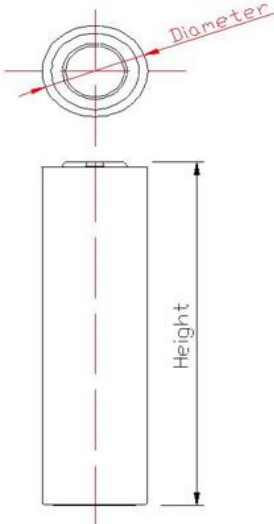

| <b>Particulars: test item vs. test requirements</b><br>Ambient temperature..... : 20°C ± 5°C.   |                |                |          |            |        |            |
|---|----------------|----------------|----------|------------|--------|------------|
| <b>Test case verdicts</b><br>Test case does not apply to the test object ..... : N (.A.)<br>Test item does meet the requirement ..... : P (ass)<br>Test item does not meet the requirement ..... : F (ail)  |                |                |          |            |        |            |
| <b>Testing</b><br>Date of receipt of test item ..... : Jul. 23, 2024<br>Date(s) of performance of test..... : Jul. 23, 2024 to Aug. 05, 2024  |                |                |          |            |        |            |
| <b>Tests performed (name of test and test clause):</b><br>cl.5.6.2 Design recommendation;<br>cl.7.1 Charging procedure for test purposes (cells);<br>cl.7.2.1 Continuous charging at constant voltage (cells);<br>cl.7.3.1 External short circuit (cells);<br>cl.7.3.3 Free fall (cells);<br>cl.7.3.4 Thermal abuse (cells);<br>cl.7.3.5 Crush (cells);<br>cl.7.3.7 Forced discharge (cells);<br>cl.7.3.9 Design evaluation – Forced internal short circuit (cells);<br>cl.8.2 Small cell and battery safety information.   |                |                |          |            |        |            |
| <b>General remarks</b><br>This test report shall not be reproduced except in full without the written approval of the testing laboratory.<br>The test results presented in this report are only relevant to the test sample.<br>"(see remark #)" refers to a remark appended to the report.<br>"(see appended table)" refers to a table appended to the report.<br>Throughout this report a dot is used as the decimal separator.<br>The test report 182715C400722101-M1 supersedes the test report 182715C400722101 which is withdrawn.<br><b>Construction</b><br><div>  <table> <tr> <th>Item</th> <th>Specifications</th> </tr> <tr> <td>Diameter</td> <td>18.0±0.3mm</td> </tr> <tr> <td>Height</td> <td>66.5±0.2mm</td> </tr> </table> </div> <div>Cell</div> | Item           | Specifications | Diameter | 18.0±0.3mm | Height | 66.5±0.2mm |
| Item  | Specifications |                |          |            |        |            |
| Diameter  | 18.0±0.3mm     |                |          |            |        |            |
| Height  | 66.5±0.2mm     |                |          |            |        |            |





**Copy of marking plate:**

The artwork below may be only a draft.

Lithium ion Rechargeable Cell

18650                      INR19/67

3.7V, 800mAh, 2.96Wh

(+),    (-)

2024.07

CAUTION

- Do not disassemble or modify
- Do not short-circuit
- Do not dispose in fire
- Do not expose to high temperature
- Do not swallowable



**General product information and other remarks:**

The cell consists of the positive electrode plate, negative electrode plate, separator, electrolyte and case.

The positive and negative electrode plates are housed in the case in the state being separated by the separator.

The main features of the cell are shown as below (clause 7.1.1):

| Model | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Final Voltage |
|-------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|---------------|
| 18650 | 800mAh           | 3.7V            | 400mA                  | 400mA                     | 800mA                  | 800mA                     | 4.2V                   | 3.0V          |

The main features of the cell are shown as below (clause 7.1.2):

| Model | Upper limit charge voltage | Taper-off current | Lower charge temperature | Upper charge temperature |
|-------|----------------------------|-------------------|--------------------------|--------------------------|
| 18650 | 4.2V                       | 40mA              | 0°C                      | 45°C                     |



| IEC 62133-2 |  |  |          |
|-------------|--|--|----------|
| Clause      | Requirement + Test   | Result - Remark                                      | Verdict  |
| <b>4</b>    | <b>PARAMETER MEASUREMENT TOLERANCES</b>  |  | <b>P</b> |
|             | Parameter measurement tolerances   |  | P        |
| <b>5</b>    | <b>GENERAL SAFETY CONSIDERATIONS</b>   |  | <b>P</b> |
| <b>5.1</b>  | <b>General</b>   |  | <b>P</b> |
|             | Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse   |  | P        |
| <b>5.2</b>  | <b>Insulation and wiring</b>   |  | <b>N</b> |
|             | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ   | No metal case exists.                                | N        |
|             | Insulation resistance (MΩ)..... :  |  | —        |
|             | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements   |  | N        |
|             | Orientation of wiring maintains adequate clearance and creepage distances between conductors   |  | N        |
|             | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse  |  | N        |
| <b>5.3</b>  | <b>Venting</b>   |  | <b>P</b> |
|             | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition            | Venting mechanism exists on the top of cell.         | P        |
|             | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief  |  | N        |
| <b>5.4</b>  | <b>Temperature, voltage and current management</b>   | Cell only  | <b>N</b> |
|             | Batteries are designed such that abnormal temperature rise conditions are prevented  |  | N        |
|             | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer   |  | N        |
|             | Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified |  | N        |
| <b>5.5</b>  | <b>Terminal contacts</b>   |  | <b>P</b> |
|             | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current   | DC terminal contacts complied with the requirements. | P        |



| IEC 62133-2 |  |  |          |
|-------------|--|--|----------|
| Clause      | Requirement + Test   | Result - Remark                                      | Verdict  |
|             | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance   | DC terminal contacts complied with the requirements. | P        |
|             | Terminal contacts are arranged to minimize the risk of short-circuit   |  | P        |
| <b>5.6</b>  | <b>Assembly of cells into batteries</b>  |  | <b>N</b> |
| 5.6.1       | General  | Cell only.   | N        |
|             | Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region  |  | N        |
|             | This protection may be provided external to the battery such as within the charger or the end devices  |  | N        |
|             | If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation  |  | N        |
|             | If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions   |  | N        |
|             | Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly   |  | N        |
|             | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer                             |  | N        |
|             | Protective circuit components added as appropriate and consideration given to the end-device application   |  | N        |
|             | The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance |  | N        |
| 5.6.2       | Design recommendation  | Cell only  | N        |
|             | For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2                                    |  | N        |



| IEC 62133-2 |  |                 |          |
|-------------|--|-----------------|----------|
| Clause      | Requirement + Test   | Result - Remark | Verdict  |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks |                 | N        |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks                |                 | N        |
|             | For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection   |                 | N        |
|             | For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer  |                 | N        |
|             | It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage   |                 | N        |
|             | For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system  |                 | N        |
| 5.6.3       | Mechanical protection for cells and components of batteries  | Cell only       | N        |
|             | Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse   |                 | N        |
|             | The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product   |                 | N        |
|             | The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer  |                 | N        |
|             | For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests   |                 | N        |
| 5.7         | <b>Quality plan</b>  |                 | <b>P</b> |





| IEC 62133-2 |   |                 |          |
|-------------|---|-----------------|----------|
| Clause      | Requirement + Test  | Result - Remark | Verdict  |
|             | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery |                 | P        |
| <b>5.8</b>  | <b>Battery safety components</b>  |                 | <b>N</b> |
|             | According annex F   |                 | N        |

|          |  |                |          |
|----------|--|----------------|----------|
| <b>6</b> | <b>TYPE TEST AND SAMPLE SIZE</b>   |                | <b>P</b> |
|          | Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old   |                | P        |
|          | Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1   | Not coin cells | N        |
|          | Unless otherwise specified, tests are carried out in an ambient temperature of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$  |                | P        |
|          | The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection  | Cell only      | N        |
|          | When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test | Cell only      | N        |

|            |   |                 |          |
|------------|---|-----------------|----------|
| <b>7</b>   | <b>SPECIFIC REQUIREMENTS AND TESTS</b>  |                 | <b>P</b> |
| <b>7.1</b> | <b>Charging procedure for test purposes</b>   | Lithium system. | <b>P</b> |
| 7.1.1      | First procedure   |                 | P        |
|            | This charging procedure applies to subclauses other than those specified in 7.1.2   |                 | P        |
|            | Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , using the method declared by the manufacturer |                 | P        |
|            | Prior to charging, the battery have been discharged at $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ at a constant current of 0,2 It A down to a specified final voltage   |                 | P        |
| 7.1.2      | Second procedure  |                 | P        |
|            | This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5 and 7.3.9   |                 | P        |



| IEC 62133-2 |   |   |          |
|-------------|---|---|----------|
| Clause      | Requirement + Test  | Result - Remark                                       | Verdict  |
|             | After stabilization for 1h to 4h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method | Charge temperature specified by manufacturer: 0-45°C. | P        |
| <b>7.2</b>  | <b>Intended use</b>   |   | <b>P</b> |
| 7.2.1       | Continuous charging at constant voltage (cells)   | Test complied.  | P        |
|             | Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer  | Charging for 7days with 400mA and 4.2V.               | P        |
|             | Results: No fire. No explosion. No leakage .....  | (See appended table 7.2.1)                            | P        |
| 7.2.2       | Case stress at high ambient temperature (battery)   | Cell only   | N        |
|             | Oven temperature (°C).....  |   | —        |
|             | Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells   |   | N        |
| <b>7.3</b>  | <b>Reasonably foreseeable misuse</b>  |   | <b>P</b> |
| 7.3.1       | External short-circuit (cell)   | Tested complied.                                      | P        |
|             | The cells were tested until one of the following occurred:  |   | P        |
|             | - 24 hours elapsed; or  |   | N        |
|             | - The case temperature declined by 20 % of the maximum temperature rise   |   | P        |
|             | Results: No fire. No explosion .....  | (See appended table 7.3.1)                            | P        |
| 7.3.2       | External short-circuit (battery)  | Cell only   | N        |
|             | The batteries were tested until one of the following occurred:  |   | N        |
|             | - 24 hours elapsed; or  |   | N        |
|             | - The case temperature declined by 20 % of the maximum temperature rise   |   | N        |
|             | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition  |   | N        |
|             | A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test  |   | N        |
|             | A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor  |   | N        |



| IEC 62133-2 |  |                            |         |
|-------------|--|----------------------------|---------|
| Clause      | Requirement + Test   | Result - Remark            | Verdict |
|             | Results: No fire. No explosion .....   |                            | N       |
| 7.3.3       | Free fall  | Tested complied.           | P       |
|             | Results: No fire. No explosion   | (See Table 7.3.3)          | P       |
| 7.3.4       | Thermal abuse (cells)  | Tested complied.           | P       |
|             | Oven temperature (°C).....   | 130°C                      | —       |
|             | Results: No fire. No explosion   | (See Table 7.3.4)          | P       |
| 7.3.5       | Crush (cells)  | Tested complied.           | P       |
|             | The crushing force was released upon:  |                            | P       |
|             | - The maximum force of 13 kN ± 0,78 kN has been applied; or  |                            | P       |
|             | - An abrupt voltage drop of one-third of the original voltage has been obtained  |                            | N       |
|             | Results: No fire. No explosion .....   | (See Table 7.3.5)          | P       |
| 7.3.6       | Over-charging of battery   | Cell only                  | N       |
|             | The supply voltage which is:   |                            | N       |
|             | - 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or  |                            | N       |
|             | - 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and   |                            | N       |
|             | - Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached  |                            | N       |
|             | Test was continued until the temperature of the outer casing:  |                            | N       |
|             | - Reached steady state conditions (less than 10°C change in 30-minute period); or  |                            | N       |
|             | - Returned to ambient  |                            | N       |
|             | Results: No fire. No explosion .....   |                            | N       |
| 7.3.7       | Forced discharge (cells)   | Tested complied.           | P       |
|             | If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration |                            | N       |
|             | If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration  |                            | P       |
|             | Results: No fire. No explosion .....   | (See appended table 7.3.7) | P       |



| IEC 62133-2 |   |   |          |
|-------------|---|---|----------|
| Clause      | Requirement + Test  | Result - Remark                                       | Verdict  |
| 7.3.8       | Mechanical tests (batteries)  | Cell only   | N        |
| 7.3.8.1     | Vibration   | Cell only   | N        |
|             | Results: No fire, no explosion, no rupture, no leakage or venting.....:   |   | N        |
| 7.3.8.2     | Mechanical shock  | Cell only   | N        |
|             | Results: No leakage, no venting, no rupture, no explosion and no fire .....   |   | N        |
| 7.3.9       | Design evaluation – Forced internal short-circuit (cells)   | Tested complied.                                      | P        |
|             | The cells complied with national requirement for.....:  | For France, Japan, Republic of Korea and Switzerland. | —        |
|             | The pressing was stopped upon:  |   | P        |
|             | - A voltage drop of 50 mV has been detected; or   |   | N        |
|             | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached   | 800N for cylindrical cells.                           | P        |
|             | Results: No fire .....  | (See appended table 7.3.9)                            | P        |
| <b>8</b>    | <b>INFORMATION FOR SAFETY</b>   |   | <b>P</b> |
| <b>8.1</b>  | <b>General</b>  |   | <b>P</b> |
|             | Manufacturers of secondary cells ensure that information is provided about current, voltage and temperature limits of their products                                      |   | P        |
|             | Manufacturers of batteries ensure that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards | Cell only   | N        |
|             | Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product                     |   | N        |
|             | As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user  |   | N        |
|             | Do not allow children to replace batteries without adult supervision  |   | N        |
| <b>8.2</b>  | <b>Small cell and battery safety information</b>  | Not small cell and battery.                           | <b>N</b> |
|             | The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:                                |   | N        |
|             | - Keep small cells and batteries which are considered swallowable out of the reach of children  |   | N        |



| IEC 62133-2 |   |   |          |
|-------------|---|---|----------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict  |
|             | - Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion   |   | N        |
|             | - In case of ingestion of a cell or battery, seek medical assistance promptly   |   | N        |
| <b>9</b>    | <b>MARKING</b>  |   | <b>P</b> |
| <b>9.1</b>  | <b>Cell marking</b>   |   | <b>P</b> |
|             | Cells marked as specified in IEC 61960, except coin cells   | See page 4.   | P        |
|             | Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity  |   | N        |
|             | By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked   |   | N        |
| <b>9.2</b>  | <b>Battery marking</b>  | Cell only   | <b>N</b> |
|             | Batteries marked as specified in IEC 61960, except for coin batteries   |   | N        |
|             | Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement               |   | N        |
|             | Terminals have clear polarity marking on the external surface of the battery  |   | N        |
|             | Batteries with keyed external connectors designed for connection to specific end products need not be marked with polarity markings if the design of the external connector prevents reverse polarity connections |   | N        |
| <b>9.3</b>  | <b>Caution for ingestion of small cells and batteries</b>   | Not small cell and battery.   | <b>N</b> |
|             | Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2   |   | N        |
|             | When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package  |   | N        |
| <b>9.4</b>  | <b>Other information</b>  |   | <b>P</b> |
|             | Storage and disposal instructions   | Information for storage and disposal instructions mentioned in manufacturer's specifications. | P        |





| IEC 62133-2 |   |   |          |
|-------------|---|---|----------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict  |
|             | Recommended charging instructions   | Information for recommended charging instructions mentioned in manufacturer's specifications. | P        |
| <b>10</b>   | <b>PACKAGING AND TRANSPORT</b>  |   | <b>N</b> |
|             | Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3 | Not coin cells.   | N        |

|                |   |                          |          |
|----------------|---|--------------------------|----------|
| <b>ANNEX A</b> | <b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b>       |                          | <b>P</b> |
| <b>A.1</b>     | <b>General</b>  |                          | <b>P</b> |
| <b>A.2</b>     | <b>Safety of lithium ion secondary battery</b>  | Complied.                | <b>P</b> |
| <b>A.3</b>     | <b>Consideration on charging voltage</b>  | Complied.                | <b>P</b> |
| A.3.1          | General   | Charging voltage is 4.2V | P        |
| A.3.2          | Upper limit charging voltage  | 4.2V                     | P        |
| A.3.2.1        | General   |                          | P        |
| A.3.2.2        | Explanation of safety viewpoint   |                          | N        |
| A.3.2.3        | Safety requirements, when different upper limit charging voltage is applied             | 4.2V applied.            | N        |
| <b>A.4</b>     | <b>Consideration of temperature and charging current</b>                                |                          | <b>P</b> |
| A.4.1          | General   |                          | P        |
| A.4.2          | Recommended temperature range   |                          | N        |
| A.4.2.1        | General   |                          | N        |
| A.4.2.2        | Safety consideration when a different recommended temperature range is applied          |                          | N        |
| A.4.3          | High temperature range  |                          | N        |
| A.4.3.1        | General   |                          | N        |
| A.4.3.2        | Explanation of safety viewpoint   |                          | N        |
| A.4.3.3        | Safety considerations when specifying charging conditions in the high temperature range |                          | N        |
| A.4.3.4        | Safety considerations when specifying a new upper limit in the high temperature range   |                          | N        |
| A.4.4          | Low temperature range   |                          | N        |
| A.4.4.1        | General   |                          | N        |
| A.4.4.2        | Explanation of safety viewpoint   |                          | N        |
| A.4.4.3        | Safety considerations, when specifying charging conditions in the low temperature range |                          | N        |



| IEC 62133-2    |   |                 |          |
|----------------|---|-----------------|----------|
| Clause         | Requirement + Test  | Result - Remark | Verdict  |
| A.4.4.4        | Safety considerations when specifying a new lower limit in the low temperature range          |                 | N        |
| A.4.5          | Scope of the application of charging current  |                 | P        |
| A.4.6          | Consideration of discharge  |                 | P        |
| A.4.6.1        | General   |                 | P        |
| A.4.6.2        | Final discharge voltage and explanation of safety viewpoint                                   |                 | N        |
| A.4.6.3        | Discharge current and temperature range   |                 | P        |
| A.4.6.4        | Scope of application of the discharging current   |                 | P        |
| <b>A.5</b>     | <b>Sample preparation</b>   |                 | <b>P</b> |
| A.5.1          | General   |                 | P        |
| A.5.2          | Insertion procedure for nickel particle to generate internal short                            |                 | P        |
| A.5.3          | Disassembly of charged cell   |                 | P        |
| A.5.4          | Shape of nickel particle  |                 | P        |
| A.5.5          | Insertion of nickel particle in cylindrical cell  |                 | P        |
| A.5.5.1        | Insertion of nickel particle in winding core  |                 | P        |
| A.5.5.2        | Marking the position of the nickel particle on both ends of the winding core of the separator |                 | P        |
| A.5.6          | Insertion of nickel particle in prismatic cell  |                 | N        |
| <b>A.6</b>     | <b>Experimental procedure of the forced internal short-circuit test</b>                       |                 | <b>P</b> |
| A.6.1          | Material and tools for preparation of nickel particle   |                 | P        |
| A.6.2          | Example of a nickel particle preparation procedure  |                 | P        |
| A.6.3          | Positioning (or placement) of a nickel particle   |                 | P        |
| A.6.4          | Damaged separator precaution  |                 | P        |
| A.6.5          | Caution for rewinding separator and electrode   |                 | P        |
| A.6.6          | Insulation film for preventing short-circuit  |                 | P        |
| A.6.7          | Caution when disassembling a cell   |                 | P        |
| A.6.8          | Protective equipment for safety   |                 | P        |
| A.6.9          | Caution in the case of fire during disassembling  |                 | P        |
| A.6.10         | Caution for the disassembling process and pressing the electrode core                         |                 | P        |
| A.6.11         | Recommended specifications for the pressing device  |                 | P        |
| <b>ANNEX B</b> | <b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>                      |                 | <b>N</b> |



| IEC 62133-2    |   |                 |          |
|----------------|---|-----------------|----------|
| Clause         | Requirement + Test  | Result - Remark | Verdict  |
| <b>ANNEX C</b> | <b>RECOMMENDATIONS TO THE END-USERS</b>   |                 | <b>N</b> |
| <b>ANNEX D</b> | <b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>   |                 | <b>N</b> |
| <b>D.1</b>     | <b>General</b>  |                 | <b>N</b> |
| <b>D.2</b>     | <b>Method</b>   |                 | <b>N</b> |
|                | A sample size of three coin cells is required for this measurement.....:  |                 | N        |
|                | Coin cells with an internal resistance of less than or equal to 3 $\Omega$ are subjected to the testing according to Clause 6 and Table 1 |                 | N        |
|                | Coin cells with an internal resistance greater than 3 $\Omega$ require no further testing   |                 | N        |
| <b>ANNEX E</b> | <b>PACKAGING AND TRANSPORT</b>  |                 | <b>N</b> |
| <b>ANNEX F</b> | <b>COMPONENT STANDARDS REFERENCES</b>   |                 | <b>N</b> |



| 7.2.1   | TABLE: Continuous charging at constant voltage (cells) |  |                             | P       |
|---|--|--|-----------------------------|---------|
| Sample No.  | Recommended charging voltage $V_{c,}$ (Vdc)            | Recommended charging current $I_{rec,}$ (mA) | OCV at start of test, (Vdc) | Results |
| C1  | 4.20   | 400  | 4.18                        | P       |
| C2  | 4.20   | 400  | 4.18                        | P       |
| C3  | 4.20   | 400  | 4.17                        | P       |
| C4  | 4.20   | 400  | 4.18                        | P       |
| C5  | 4.20   | 400  | 4.18                        | P       |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No leakage |  |  |                             |         |

| 7.3.1   | TABLE: External short circuit (cell) |                             |                             |                               | P       |
|---|--------------------------------------|-----------------------------|-----------------------------|-------------------------------|---------|
| Sample No.  | Ambient T(°C)                        | OCV at start of test, (Vdc) | Resistance of circuit, (mΩ) | Maximum case temperature (°C) | Results |
| Charging temperature: 45°C                                  |                                      |                             |                             |                               |         |
| C6  | 55.2                                 | 4.18                        | 82.1                        | 108.1                         | P       |
| C7  | 55.2                                 | 4.17                        | 83.6                        | 106.2                         | P       |
| C8  | 55.2                                 | 4.17                        | 81.3                        | 114.9                         | P       |
| C9  | 55.2                                 | 4.18                        | 82.5                        | 112.5                         | P       |
| C10   | 55.2                                 | 4.17                        | 80.8                        | 110.4                         | P       |
| Charging temperature: 0°C                                   |                                      |                             |                             |                               |         |
| C11   | 55.6                                 | 4.13                        | 82.3                        | 109.7                         | P       |
| C12   | 55.6                                 | 4.14                        | 80.5                        | 106.6                         | P       |
| C13   | 55.6                                 | 4.13                        | 78.5                        | 105.7                         | P       |
| C14   | 55.6                                 | 4.12                        | 77.8                        | 111.5                         | P       |
| C15   | 55.6                                 | 4.13                        | 76.6                        | 108.7                         | P       |
| <b>Supplementary information:</b><br>- No fire or explosion |                                      |                             |                             |                               |         |

| 7.3.3   | TABLE: Free fall            |  | P       |
|---|-----------------------------|--|---------|
| Sample No.  | OCV at start of test, (Vdc) | OCV at removal of thermal free fall, (Vdc) | Results |
| C16   | 4.17                        | 4.17                                       | P       |
| C17   | 4.17                        | 4.17                                       | P       |
| C18   | 4.18                        | 4.18                                       | P       |
| <b>Supplementary information:</b><br>- No fire or explosion |                             |  |         |



| 7.3.4   | TABLE: Thermal abuse (cells) |                 |                                    | P       |
|---|------------------------------|-----------------|------------------------------------|---------|
| Sample No.  | OCV at start of test, (Vdc)  | Ambient T, (°C) | Temperature raised at a rate, (°C) | Results |
| Charging temperature: 45°C                                  |                              |                 |                                    |         |
| C19   | 4.17                         | 130±2           | 5°C/min                            | P       |
| C20   | 4.17                         | 130±2           | 5°C/min                            | P       |
| C21   | 4.17                         | 130±2           | 5°C/min                            | P       |
| C22   | 4.16                         | 130±2           | 5°C/min                            | P       |
| C23   | 4.16                         | 130±2           | 5°C/min                            | P       |
| Charging temperature: 0°C                                   |                              |                 |                                    |         |
| C24   | 4.12                         | 130±2           | 5°C/min                            | P       |
| C25   | 4.11                         | 130±2           | 5°C/min                            | P       |
| C26   | 4.12                         | 130±2           | 5°C/min                            | P       |
| C27   | 4.12                         | 130±2           | 5°C/min                            | P       |
| C28   | 4.11                         | 130±2           | 5°C/min                            | P       |
| <b>Supplementary information:</b><br>- No fire or explosion |                              |                 |                                    |         |

| 7.3.5   | TABLE: Crush (cells)   |   |  | P       |
|---|------------------------|---|--|---------|
| Sample No.  | OCV before test, (Vdc) | OCV at removal of crushing force, (Vdc) | Maximum force applied to the cell during crush, (kN) | Results |
| Charging temperature: 45°C                                  |                        |   |  |         |
| C29   | 4.17                   | 4.17                                    | 13.2   | P       |
| C30   | 4.16                   | 4.16                                    | 13.1   | P       |
| C31   | 4.16                   | 4.16                                    | 13.0   | P       |
| C32   | 4.16                   | 4.16                                    | 13.0   | P       |
| C33   | 4.17                   | 4.17                                    | 13.1   | P       |
| Charging temperature: 0°C                                   |                        |   |  |         |
| C34   | 4.12                   | 4.12                                    | 13.1   | P       |
| C35   | 4.12                   | 4.12                                    | 13.1   | P       |
| C36   | 4.11                   | 4.11                                    | 13.0   | P       |
| C37   | 4.13                   | 4.13                                    | 13.2   | P       |
| C38   | 4.13                   | 4.13                                    | 13.1   | P       |
| <b>Supplementary information:</b><br>- No fire or explosion |                        |   |  |         |





| 7.3.7   | TABLE: Forced discharge (cells)                 |                                     |                                      | P       |
|---|---|-------------------------------------|--------------------------------------|---------|
| Sample No.  | OCV before application of reverse charge, (Vdc) | Measured reverse charge $I_t$ , (A) | Lower limit discharge voltage, (Vdc) | Results |
| C39   | 3.32  | 0.8                                 | 3.0                                  | P       |
| C40   | 3.31  | 0.8                                 | 3.0                                  | P       |
| C41   | 3.33  | 0.8                                 | 3.0                                  | P       |
| C42   | 3.31  | 0.8                                 | 3.0                                  | P       |
| C43   | 3.32  | 0.8                                 | 3.0                                  | P       |
| <b>Supplementary information:</b><br>- No fire or explosion |   |                                     |                                      |         |

| 7.3.9  | TABLE: Forced internal short circuit (cells) |                        |                                 |                               | P       |
|--|--|------------------------|---------------------------------|-------------------------------|---------|
| Sample No.   | Chamber ambient T, (°C)                      | OCV before test, (Vdc) | Particle location <sup>1)</sup> | Maximum applied pressure, (N) | Results |
| Charging temperature: 45°C   |  |                        |                                 |                               |         |
| C44  | 45   | 4.16                   | 1                               | 800                           | P       |
| C45  | 45   | 4.16                   | 1                               | 800                           | P       |
| C46  | 45   | 4.17                   | 1                               | 800                           | P       |
| C47  | 45   | 4.18                   | 1                               | 800                           | P       |
| C48  | 45   | 4.17                   | 1                               | 800                           | P       |
| Charging temperature: 0°C  |  |                        |                                 |                               |         |
| C49  | 0  | 4.12                   | 1                               | 800                           | P       |
| C50  | 0  | 4.13                   | 1                               | 800                           | P       |
| C51  | 0  | 4.13                   | 1                               | 800                           | P       |
| C52  | 0  | 4.12                   | 1                               | 800                           | P       |
| C53  | 0  | 4.11                   | 1                               | 800                           | P       |
| <b>Supplementary information:</b><br><sup>1)</sup> Identify one of the following:<br>1: Nickel particle inserted between positive and negative (active material) coated area.<br>2: Nickel particle inserted between positive aluminium foil and negative active material coated area.<br>- No fire or explosion |  |                        |                                 |                               |         |

| D.2   | TABLE: Internal AC resistance for coin cells |                |                          | N                     |
|---|--|----------------|--------------------------|-----------------------|
| Sample No.  | Ambient T (°C)                               | Store time (h) | Resistance $R_{ac}$ (mΩ) | Results <sup>1)</sup> |
| --  | --   | --             | --                       | --                    |
| --  | --   | --             | --                       | --                    |
| --  | --   | --             | --                       | --                    |
| <b>Supplementary information:</b><br><sup>1)</sup> Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables |  |                |                          |                       |




|   | TABLE: List of critical components |            |                |                           | P                                   |
|---|------------------------------------|------------|----------------|---------------------------|-------------------------------------|
| Object/part No.   | Manufacturer/ trademark            | Type/model | Technical data | Standard (Edition / year) | Mark(s) of conformity <sup>1)</sup> |
| Cell  |                                    | 18650      | 3.7V, 800mAh   | IEC 62133-2:2017+A1:2021  | Test with appliance                 |
| 1) An asterisk indicates a mark which assures the agreed level of surveillance. |                                    |            |                |                           |                                     |




**Photo 1**

- ☒ front  
☐ rear  
☐ right side  
☐ left side  
☐ top  
☐ bottom  
☐ internal

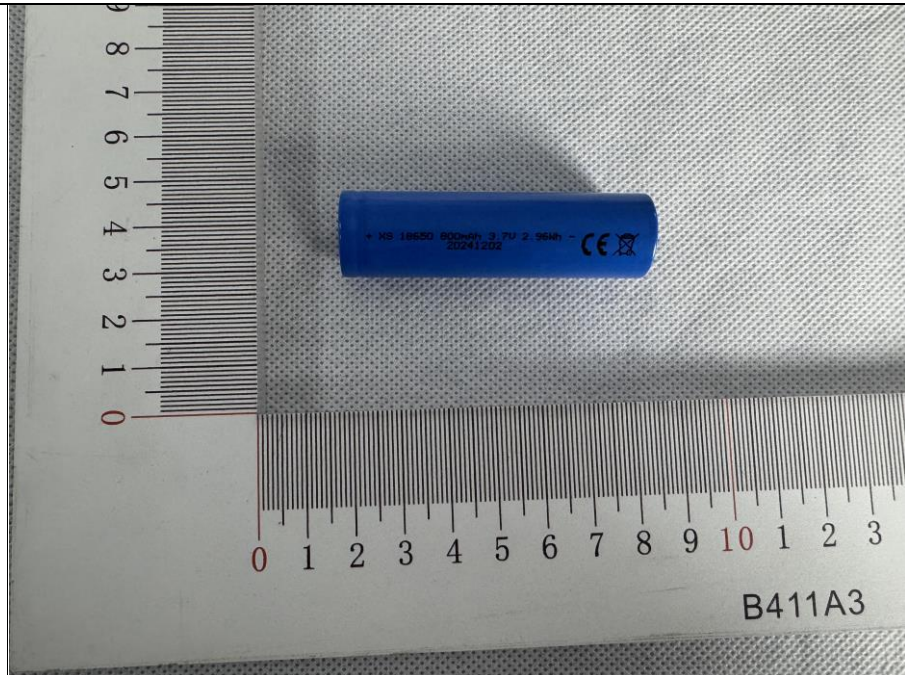

**Photo 2**

- ☐ front  
☒ rear  
☐ right side  
☐ left side  
☐ top  
☐ bottom  
☐ internal

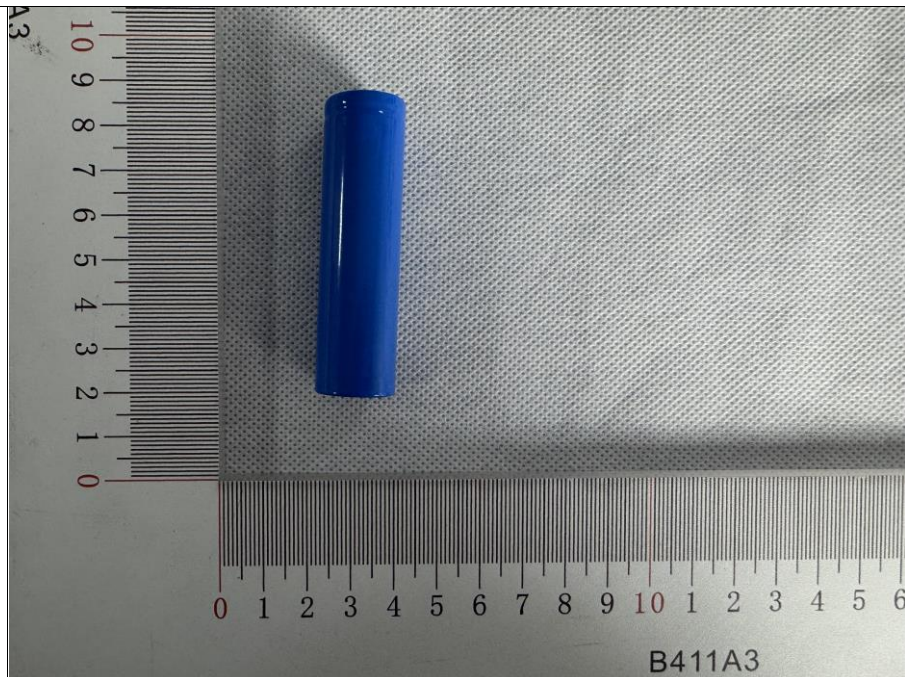

\*\*\*End of the report\*\*\*

