



# **EMC Test Report**

Report No.: AGC05443240202EE01

PRODUCT DESIGNATION	:	3 LED torch with magnet
BRAND NAME	:	N/A
MODEL NAME	:	M08225
APPLICANT	:	MID OCEAN BRANDS B.V
DATE OF ISSUE	:	Feb. 23, 2024
STANDARD(S)	:	EN IEC 55015:2019/A11:2020 EN 61547:2009
<b>REPORT VERSION</b>	:	V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb. 23, 2024	Valid	Initial release



## **Table of contents**

1. Genera	al information	. 5
2. Descri	ption of Test Configuration	. 6
2.1.	Technical Description of Product	. 6
2.2.	Description of Support Equipment	. 6
2.3.	Description of Test Modes	. 6
3. Summa	ary of Measurement Results and Uncertainty	. 7
3.1.	Test Specifications	. 7
3.2.	Description of Measurement Results	. 7
3.3.	Description of Measurement Uncertainty	. 9
4. Test Fa	acility	10
5. Measu	rement of Radiated Emissions at Frequencies up to 1 GHz	11
5.1.	Requirements	11
5.2.	Block Diagram of Test Setup	11
5.3.	Equipment Details	12
5.4.	Configuration of the EUT and method of measurement	12
5.5.	Test Summary	13
6. Measu	rement of Electrostatic discharge	15
6.1.	Requirements	15
6.2.	Block Diagram of Test Setup	15
6.3.	Equipment Details	16
6.4.	Configuration of the EUT and method of measurement	16
6.5.	Test Summary	17
7. Measu	rement of Radio-Frequency Electromagnetic Field	18
7.1.	Requirements	18
7.2.	Block Diagram of Test Setup	19
7.3.	Equipment Details	20
7.4.	Configuration of the EUT and method of measurement	20
7.5.	Test Summary	21
8. Measu	rement of Power-frequency magnetic field	22
8.1.	Requirements	22
8.2.	Block Diagram of Test Setup	22
8.3.	Equipment Details	23
8.4.	Configuration of the EUT and method of measurement	23



8.5.	Test Summary	24
9. Photog	raphs of Test Setup	25
10. Photo	graphs of EUT	27



# 1. General information

Applicant	MID OCEAN BRANDS B.V	
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong	
Manufacturer	MID OCEAN BRANDS B.V	
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong	
Factory	MID OCEAN BRANDS B.V	
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong	
Product Designation	3 LED torch with magnet	
Brand Name	N/A	
Test Model	MO8225	
Series Model(s)	N/A	
Difference Description	N/A	
Deviation from Standard	No any deviation from the test method	
Date of receipt of test item	Feb. 20, 2024	
Date of Test	Feb. 20, 2024 to Feb. 23, 2024	
Test Result	Pass	
Test Report Form No	AGCER-EMC-GEN-V1	
Note: The test results of this report relate only to the tested sample identified in this report.		

Prepared By

Jouk Gai

Jack Gui (Project Engineer)

Feb. 23, 2024

Reviewed By

in Lu

Calvin Liu (Reviewer)

Feb. 23, 2024

Approved By

Max Zran

Max Zhang (Authorized Officer)

Feb. 23, 2024



# 2. Description of Test Configuration

## 2.1. Technical Description of Product

Test arrangements of EUT	Table-top
Hardware Version	N/A
Software Version	N/A
EUT Input Rating	DC 6.0V by battery

#### **Connection Diagram of Host System**



# I/O Port Information ( Applicable Not Applicable)

Port Type	Input/Output	Number	Cable Description

## 2.2. Description of Support Equipment

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable

#### 2.3. Description of Test Modes

No.	Test Mode Description	Worst
1	Lighting mode	
	Flash light mode	

Note: 1. Only worst mode data recorded in the test report.



# 3. Summary of Measurement Results and Uncertainty

## 3.1. Test Specifications

EN IEC 55015:2019/A11:2020	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547:2009	Equipment for general lighting purposes - EMC immunity requirements

## 3.2. Description of Measurement Results

Test items	Test Standard(s)	Verdict
Radiated emissions at frequencies up to 1 GHz	EN IEC 55015	Pass
Electrostatic discharge	IEC 61000-4-2 <sup>a</sup>	Pass
Radio-frequency electromagnetic field	IEC 61000-4-3 <sup>a</sup>	Pass
Power-frequency magnetic field	IEC 61000-4-8 <sup>a</sup>	Pass
Neter		

Note:

a. The applicable versions of the basic standards are defined in the standard which listed in the test specification.



#### Performance table

	Performance Criteria for Immunity	
Performance	During the test, no change of the luminous intensity shall be observed and the regulating	
criterion A	control, if any, shall operate during the test as intended.	
Performance criterion B	During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min (30 min for high pressure gas discharge lamps). Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test, provided that during the test no mode changing commands were given.	
Performance criterion C	During and after the test, any change of the luminous intensity is allowed and the light source(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.	
The following additional requirement applies to lighting equipment incorporating a starting device: after the test,		
the lighting equipment is switched off for 30 min and back on again. The lighting equipment shall start and		
operate as intended.		



## 3.3. Description of Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Conducted emissions from the AC mains power ports	$Uc = \pm 2.9 dB$
Radiated emissions at frequencies up to 1 GHz	Uc = ±3.9 dB
Radiated emissions at frequencies above 1 GHz	$Uc = \pm 4.9 dB$



# 4. Test Facility

Laboratory name: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Laboratory Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized Interna tional Standard ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laborat ories (CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the Electrical field.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

# **IC-Registration No.: 24842**

#### CAB identifier: CN0063

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

#### VCCI Membership No.: 4112

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered in accordance with VCCI Council Rules.

VCCI Registration No. C-20098 for conducted emissions at AC main power ports

VCCI Registration No. T-20102 for conducted emissions at telecommunication ports

VCCI Registration No. R-20136 for radiated emissions below 1GHz

VCCI Registration No. G-20132 for radiated emissions above 1GHz



# 5. Measurement of Radiated Emissions at Frequencies up to 1 GHz


## 5.1. Requirements

Requirements for radiated emissions at frequencies up to 1 GHz at 3m distance

Test facility	Detector type/ bandwidth	Frequency Range (MHz)	Limits dB(µV/m)	Measurement specifications
Quasi-peak/		30 to 230	40	Instrumentation: CISPR 16-1-1, Clauses 4, 5 Antennas: CISPR 16-1-4, Clause 4.5
SAC	120kHz	230 to 1000	47	Test Site: CISPR 16-1-4, Clause 6 Method: CISPR 16-2-3, Clause 7.6
Note:				

1. The lower limit shall apply at the transition frequency.

# 5.2. Block Diagram of Test Setup

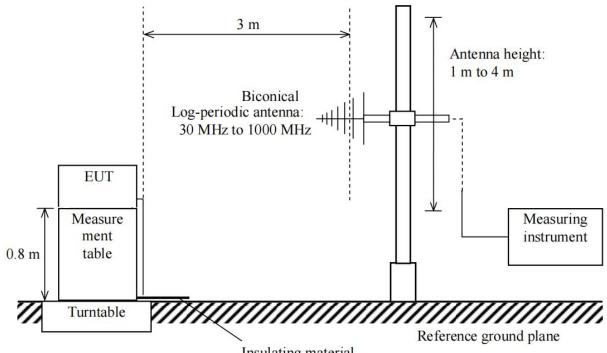

Insulating material



# 5.3. Equipment Details

Measuring Instruments							
Instruments Manufacturer Model S/N Cal. Date Cal. Due							
Test Receiver R&S ESCI 10096 Feb. 01, 2024 Jan. 3							
Antenna SCHWARZBECK VULB9168 D69250 May 11, 2023 I							
Attenuator	East sheep	LM-XX-6-5W	N/A	Jun. 09, 2023	Jun. 08, 2024		
		Magguring	Coffinia ro				

Measuring Software

Software Name	Manufacturer	Details
EZ-EMC	FARA	For EMC Measurement, Version RA-03A

# 5.4. Configuration of the EUT and method of measurement

- a. The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- b. Support equipment, if needed, was placed as per CISPR 16-2-3.
- c. All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-3.
- d. The maximum receiving level of radiated emissions from the EUT was measured while the turntable was rotated from 0° to 360° and the antenna height was scanned between 1 m and 4 m. The cables were laid out to attain the maximum level of radiated emissions.
- e. The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- f. Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- g. A radiated emission is calculated by the following equation:
  - Measurement Level dB(µV/m) = Receiver reading dB(µV) + Factor(dB/m)
  - Factor(dB/m) = Antenna Factor(dB/m) + Cable Loss(dB)
  - Margin= Limit-Level




## 5.5. Test Summary

Test Engineer	Carpe	Temperature	<b>23.2</b> ℃
Test Date	Feb. 20, 2024	Air Pressure	985 Mbar
Worst Mode	Mode 2	Relative Humidity	59.8 %
Verdict	Pass		

	Test gra	aph and data fo	r Radiated Emiss	sion at Horizonta	al	
		Test	Mode: Mode 2			
72.0 dB	uV/m				Limit: — Margin: —	
-8 30.000			(MHz)	0 / <u>1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 </u>	5 5 6 6 6 6 6 7 0 1000	000
Frequency[MHz]	Level[dBµV/m]	Factor[dB]	Limit[dBµV/m]	Margin[dB]	Detector	Polarity
41.4215	20.86	13.80	40.00	19.14	peak	Horizontal
117.7725	22.74	16.38	40.00	17.26	peak	Horizontal
383.9318	27.97	18.63	47.00	19.03	peak	Horizontal
437.1199	31.64	24.48	47.00	15.36	peak	Horizontal
620.7096	31.73	25.13	47.00	15.27	peak	Horizontal
896.9965	37.13	31.42	47.00	9.87	peak	Horizontal



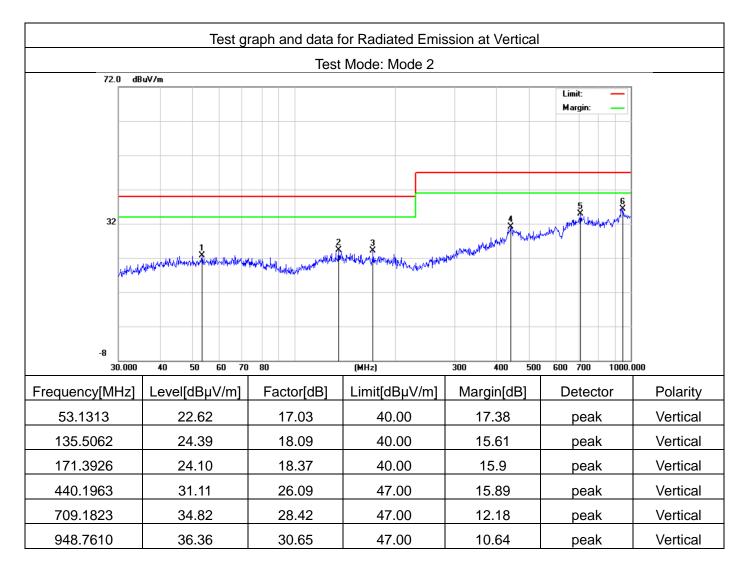




# 6. Measurement of Electrostatic discharge

## 6.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-2
Test Level	±8.0 kV (Air Discharge) ±4.0 kV (Contact Discharge)
Required Performance Criterion	±4.0 kV (Indirect Discharge) B
Time Between Each Discharge:	1 second
Number of Discharge for Each Applied Voltage	10

# 6.2. Block Diagram of Test Setup

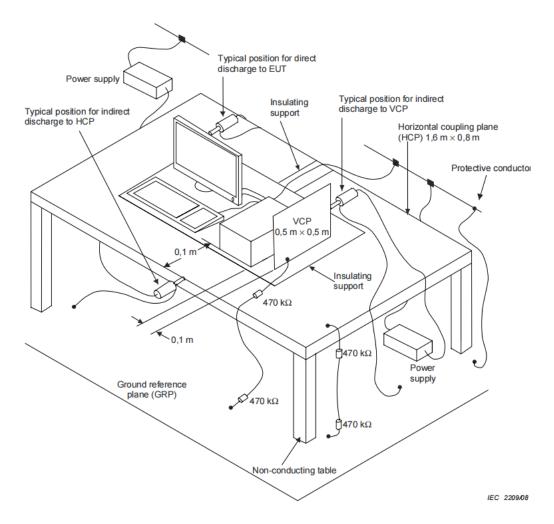



## 6.3. Equipment Details

Measuring Instruments						
Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
ESD Simulator	Schaffner	NSG 438	782	Nov. 13, 2023	Nov. 12, 2024	
Measuring Software						
Software Name	Manufacturer	Details				

## 6.4. Configuration of the EUT and method of measurement

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were completed.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m×0.5m) was placed vertically to and 0.1 meters from the EUT.
- i. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.



## 6.5. Test Summary

Test Engineer	Sam	Temperature	<b>23.1</b> ℃
Test Date	Feb. 22, 2024	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2	Relative Humidity	52.1 %
Verdict	Pass		

Voltage	Coupling	Observation	Performance
±4kV	Contact Discharge	No degradation of performance	A
±2KV, ±4kV, ±8kV	Air Discharge	No degradation of performance	A
±4kV	Indirect Discharge HCP	No degradation of performance	A
±4kV	Indirect Discharge VCP	No degradation of performance	A

# Red line: Contact discharge Blue line: Air discharge





# 7. Measurement of Radio-Frequency Electromagnetic Field

## 7.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-3
Required Performance Criterion	A
Test Level	3V/m with 80% AM. 1kHz Modulation at 80 to 1000MHz
Antenna polarization	Vertical and Horizontal
Step size increment <sup>a</sup>	1%
Dwell time <sup>b</sup>	<5 seconds
Test Distance	3m
EUT position facing antenna	Front side, back side, left side and right side
NI. C	•


Notes:

a. Recognizing that a 1% step size is preferred, the frequency range can be swept incrementally with a step size not exceeding 4% of the previous frequency with a test level of twice the value of the specified test level in order to reduce the testing time for equipment requiring testing in multiple configurations and/or long cycle times.

b. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan. The time to exercise the EUT is not interpreted as a total time of a program or a cycle but related to the reaction time in case of failure of the EUT.



# 7.2. Block Diagram of Test Setup

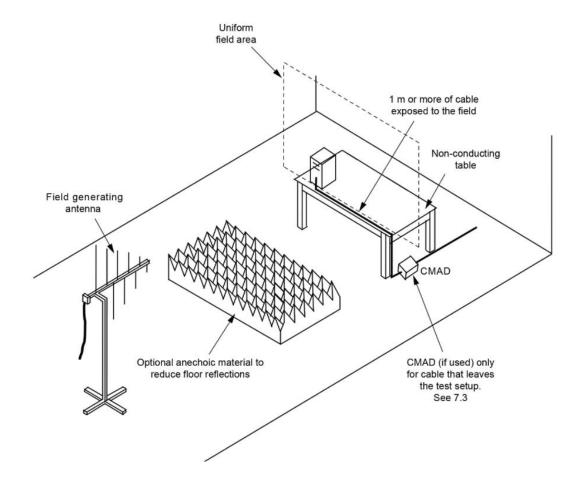



TS+[JS35-RS]

# 7.3. Equipment Details

	Measuring Instruments						
Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due		
Signal Generator	Aglient	N5182A	MY50140530	Feb. 01, 2024	Jan. 31, 2025		
Directional coupler	Werlatone	C5571-10	99463	Mar. 10, 2022	Mar. 09, 2024		
Power Meter	R&S	NRVD	8323781027	Mar. 24, 2023	Mar. 23, 2025		
Power Amplifier	KALMUS	7100LC	04-02/17-06-001	Apr. 25, 2023	Apr. 24, 2024		
Wideband Antenna	ETS	3142C	00060447				
	Measuring Software						
Software Name	Manufacturer	Details					
1							

For EMC measurement, version 2.0.1.8

Magguring Instrumente

# 7.4. Configuration of the EUT and method of measurement

Tonscend

- a. The Equipment Under Test (EUT) was positioned within the Uniform Field Area (UFA) on a supporting table, ensuring a 3-meter separation from the transmitting antenna. This setup aligns with the calibrated square area, guaranteeing field uniformity during testing. The supporting units were strategically located outside the UFA to avoid any potential interference. Nonetheless, the cables connected to the EUT were intentionally exposed to the precisely calibrated field within the UFA.
- b. Before testing, it will verify the proper operation of the test equipment/system. This verification will involve measuring the field strength at one point within the Uniform Field Area (UFA) at various frequencies.
- c. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- d. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.



## 7.5. Test Summary

Test Engineer	Carpe	Temperature	<b>23.2</b> ℃
Test Date	Feb. 21, 2024	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2	Relative Humidity	59.8 %
Verdict	Pass		

Frequency	Exposed Side	Field Strength (V/m)	Observation	Performance
80MHz to 1GHz	Front	3V/m (rms)	No degradation of performance	А
	Left		No degradation of performance	А
	Rear		No degradation of performance	А
	Right		No degradation of performance	А




# 8. Measurement of Power-frequency magnetic field

# 8.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-8
Test Level	3 A/m
Frequency	50Hz
Required Performance Criterion	А
Application of the magnetic field	Continuous

# 8.2. Block Diagram of Test Setup

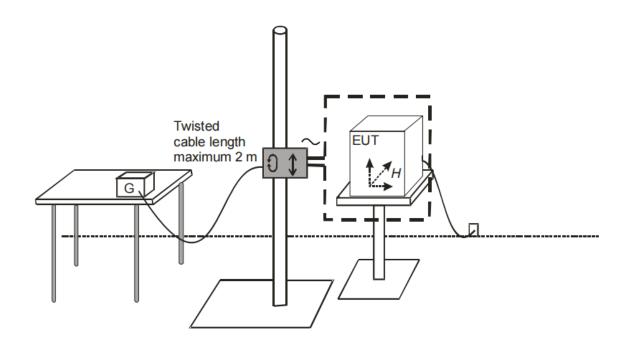



# 8.3. Equipment Details

Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power frequency field immunity device with coil	HTEC	HPFMF	161701	Jun. 01, 2023	May 31, 2024
Measuring Software					

Moocuring Instruments

Software Name	Manufacturer	Details

# 8.4. Configuration of the EUT and method of measurement

- a. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- b. The power supply, signal and other functional electrical quantities shall be applied within their rated range.
- c. If the actual operating signals are not available, they may be simulated.
- d. Preliminary verification of equipment performances shall be carried out prior to applying the test magnetic field.
- e. The plane of the inductive coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations and the same procedure.
- f. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.



#### 8.5. Test Summary

Test Engineer	Sam	Temperature	<b>23.9</b> ℃
Test Date	Feb. 22, 2024	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2	Relative Humidity	52.7 %
Verdict	Pass		

Frequency	Test Level	Observation	Performance
50Hz	3A/m	No degradation of performance	А



Report No.: AGC05443240202EE01 Page 25 of 31

# 9. Photographs of Test Setup



Radiated emissions at frequencies up to 1 GHz



#### Electrostatic discharge

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



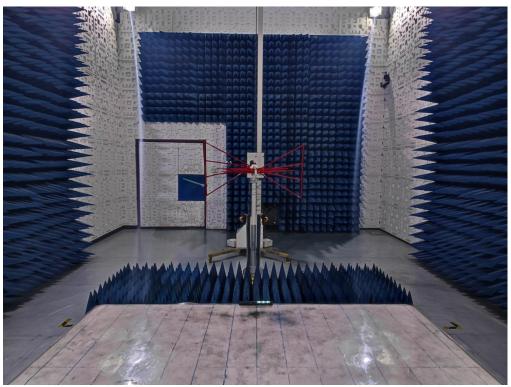

Radio-frequency electromagnetic field up to 1 GHz



Power-frequency magnetic field

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



Report No.: AGC05443240202EE01 Page 27 of 31

# 10. Photographs of EUT

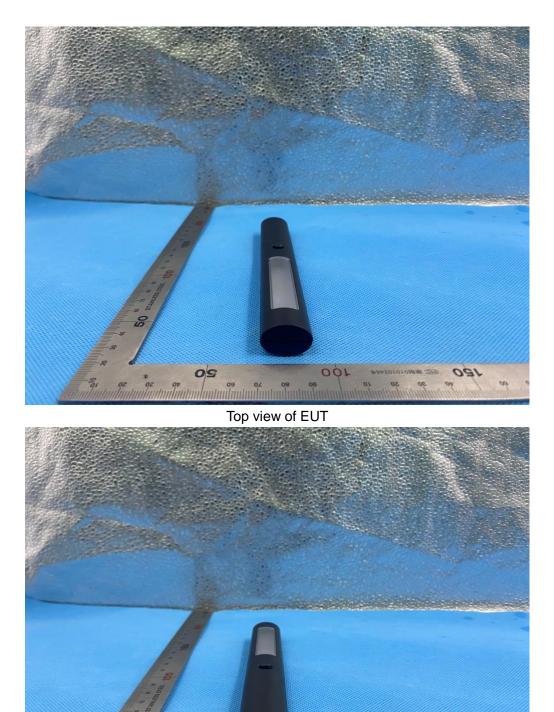

#### Bottom view of EUT

001

05









Back view of EUT



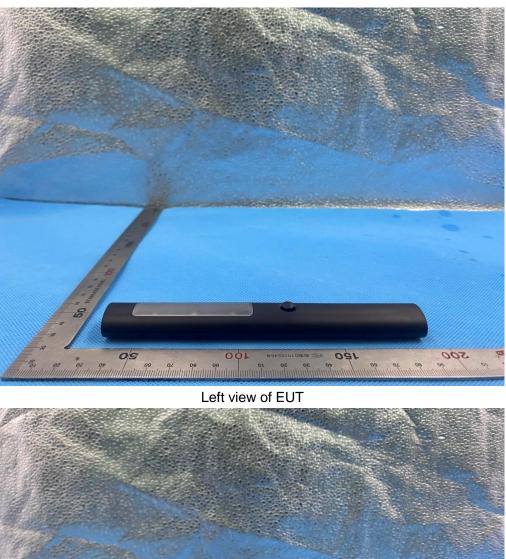

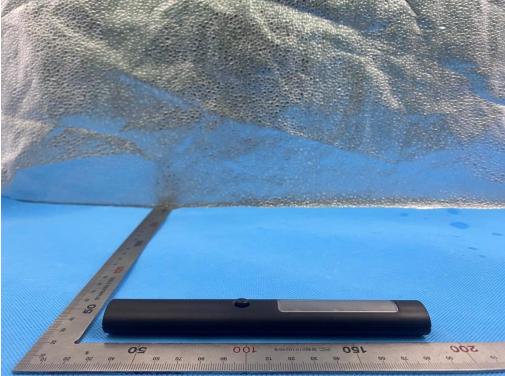


## Right view of EUT





Open view-2 of EUT



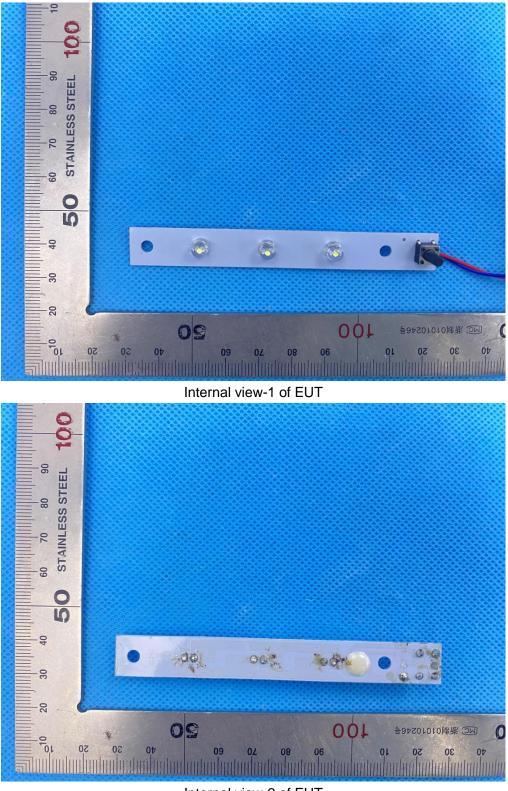

Internal view-2 of EUT ----End of Report----