



中国认可
国际互认
检测
TESTING
CNAS L3110



TEST REPORT

Reference No...... : WTF26D01025446D
Applicant..... : Mid Ocean Brands B.V.
Address..... : Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan,
Kowloon, Hong Kong.
Manufacturer : 114538
Product..... : EU 2-pole wall adapter/charger
Model(s)..... : MO2979
Total pages..... : 93 pages and 11 pages of photo.
Standards..... : EN IEC 62368-1: 2020+A11: 2020
Audio/video, information and communication technology equipment -
Part 1:Safety requirements
Date of Receipt sample..... : 2026-01-28
Date of Test..... : 2026-01-29 to 2026-03-26
Date of Issue..... : 2026-03-27
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City,
Guangdong, China
Tel: +86-769-2267 6998
Fax: +86-769-2267 6828

Compiled by:

Grace Feng

Grace Feng / Project Engineer

Approved by:

Deval Qin

Deval Qin / Designated Reviewer



Test Item description	EU 2-pole wall adapter/charger
Trade Mark(s)	MOB
Model/Type reference	MO2979
Ratings	Input: AC 110-240V 50/60Hz 1.5A Max. Output: See Copy of marking plate.
Remark:	
Whether parts of tests for the product have been subcontracted to other labs:	
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
If Yes, list the related test items and lab information:	
Test items: --	
Lab information: --	
Summary of testing:	
These samples are tested and complied with the requirements of standards listed on this report.	
Tests performed (name of test and test clause):	Testing location:
- EN IEC 62368-1:2020+A11:2020	No. 77, Houjie Section, Guantai Road,
The submitted samples were found to comply with the requirements of above specification.	Houjie Town, Dongguan City, Guangdong, China
Summary of compliance with National Differences (List of countries addressed):	
List of countries addressed: National Differences and Group Differences for CENELEC countries were checked.	
<input checked="" type="checkbox"/> The product fulfils the requirements of EN IEC 62368-1:2020+A11:2020.	
Statement concerning the uncertainty of the measurement systems used for the tests	
N/A	
<input type="checkbox"/> Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:	
Procedure number, issue date and title:	
N/A	
<input type="checkbox"/> Statement not required by the standard used for type testing	
N/A	

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

MOB/MO2979
PO BOX 644,
6710BP(NL)
PO:41-117967
Made in China
www.momanual.com

Input:AC110-240V 50/60Hz 1.5A Max
Output:TYPE-C:5.0V \approx 3.0A,9.0V \approx 3.0A,12.0V \approx 3.0A
15.0V \approx 3.0A,20.0V \approx 3.25A,65.0W MAX
USB-A:5.0V \approx 3.0A,9.0V \approx 2.0A,12.0V \approx 1.5A,18.0W MAX
TYPE-C+USBA: PD45.0W+QC18.0W

**Remark:**

1. The above markings are the minimum requirements required by the safety standard. For the final production, the additional markings which do not give rise to misunderstanding may be added.
2. The CE marking and WEEE symbol should be at least 5.0mm and 7.0mm respectively in height.
3. According to the EU directives which have been aligned with EU NLF (new legislative framework), both of manufacturer and importer's name and address shall be affixed on the product or, where that is not possible, on its packaging or in a document accompanying the product before the product is placed on the EU market.

**Test item particulars:**

Product group: end product built-in component

Classification of use by.....: Ordinary person Children likely present
 Instructed person
 Skilled person

Supply connection.....: AC mains DC mains
 not mains connected:
 ES1 ES2 ES3

Supply tolerance: +10%/-10%
 +20%/-15%
 +__%/-__%
 None

Supply connection – type: pluggable equipment type A -
 non-detachable supply cord
 appliance coupler
 direct plug-in
 pluggable equipment type B -
 non-detachable supply cord
 appliance coupler
 permanent connection
 mating connector other:

Considered current rating of protective device: Others: 16 A
Location: building equipment
 N/A

Equipment mobility.....: movable hand-held transportable
 direct plug-in stationary for building-in
 wall/ceiling-mounted SRME/rack-mounted
 other: ____

Overvoltage category (OVC): OVC I OVC II OVC III
 OVC IV other:

Class of equipment: Class I Class II Class III
 Not classified ____

Special installation location: N/A restricted access area
 outdoor location ____

Pollution degree (PD): PD 1 PD 2 PD 3

Manufacturer's specified T_{ma}.....: 25°C Outdoor: minimum ____°C

IP protection class: IPX0 IPX5

Power systems: TN TT IT - __V_{L-L}
 not AC mains

Altitude during operation (m): 2000 m or less __m

Altitude of test laboratory (m): 2000 m or less __m

Mass of equipment (kg): Approx.0.112kg



Possible test case verdicts:

- test case does not apply to the test object.... : N/A
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement.... : F (Fail)

Testing:

Date of receipt of test item..... : 2026-01-28
 Date (s) of performance of tests.....: 2026-01-29 to 2026-03-26

General remarks:

”(see Enclosure #)” refers to additional information appended to the report.
 “(see appended table)” refers to a table appended to the report.

Throughout this report a comma / point is used as the decimal separator.

General Product Information:

Product Description:

1. The equipment is intended to use in Audio/video, information and communication technology equipment.
2. Specified maximum ambient temperature is 25°C.
3. The test samples are pre-production sample without serial numbers.
4. The output of Power Supply Unit was evaluated to comply with the requirements of limited power sources (Annex Q.1).
5. The EU plug complies with the standard requirements of EN 50075.

Model Differences

N/A

Additional application considerations

N/A



OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS				
Clause	Possible Hazard			
5	Electrically-caused injury			
Class and Energy Source (e.g. ES3: Primary circuit)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
ES3: Primary circuits supplied by a.c. mains supply	Ordinary	N/A	N/A	Transformer see 5.5.3, enclosure see 5.4.2, 5.4.3 and 5.4.4, Y-cap. see 5.5.2, Optocoupler see 5.5.4
ES1: Secondary output connector	Ordinary	N/A	N/A	N/A
6	Electrically-caused fire			
Class and Energy Source (e.g. PS2: 100 Watt circuit)	Material part (e.g. Printed board)	Safeguards		
		B	1 st S	2 nd S
PS3: All primary circuits inside the equipment enclosure	Enclosure	See 6.3	V-0	N/A
PS3 circuit	PCB	See 6.3	V-1 or better	N/A
PS3 circuit	Plastic materials not part of PS3 circuit	See 6.3	V-2 or better	N/A
PS3 circuit and PS2: Internal circuit and output circuit	The other components/materials	See 6.3	See 6.4.5, 6.4.6	N/A
PS3 circuit	Internal wiring	N/A	N/A	See 6.5
PS2 circuit: output circuits	USB output terminal	See 6.3	Min. V-1	N/A
7	Injury caused by hazardous substances			
Class and Energy Source (e.g. Ozone)	Body Part (e.g., Skilled)	Safeguards		
		B	S	R
N/A	N/A	N/A	N/A	N/A
8	Mechanically-caused injury			
Class and Energy Source (e.g. MS3: Plastic fan blades)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
MS1: Mass of the unit	Ordinary	N/A	N/A	N/A
MS1: Edges and corners	Ordinary	N/A	N/A	N/A



9	Thermal burn			
Class and Energy Source (e.g. TS1: Keyboard caps)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
TS1: Accessible surface	Ordinary	N/A	N/A	N/A
TS3: Internal parts/circuits	Ordinary	N/A	N/A	Enclosure
10	Radiation			
Class and Energy Source (e.g. RS1: PMP sound output)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
N/A	N/A	N/A	N/A	N/A
Supplementary Information: “B” – Basic Safeguard; “S” – Supplementary Safeguard; “R” – Reinforced Safeguard				

ENERGY SOURCE DIAGRAM

Indicate which energy sources are included in the energy source diagram. Insert diagram below

ES PS MS TS RS

See details in OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies	See appended table 4.1.2	P
4.1.2	Use of components	Components which are certified to IEC and/or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment. See also Annex G.	P
4.1.3	Equipment design and construction	Evaluation of safeguards regarding preventing access to ES3 parts, limiting the source supplying outputs to fulfill ES1, and protection in regard to risk of ignition, mechanical-caused injury and thermal burn considered.	P
4.1.4	Specified ambient temperature for outdoor use (°C) :	Indoor use	N/A
4.1.5	Constructions and components not specifically covered		N/A
4.1.8	Liquids and liquid filled components (LFC)	(See G.15)	N/A
4.1.15	Markings and instructions	(See Annex F)	P
4.4.3	Safeguard robustness	See below.	P
4.4.3.1	General		P
4.4.3.2	Steady force tests	(See Annex T.2, T.4)	P
4.4.3.3	Drop tests	(See Annex T.7)	P
4.4.3.4	Impact tests		N/A
4.4.3.5	Internal accessible safeguard tests	The external enclosure cannot be opened without damaging the product.	N/A
4.4.3.6	Glass impact tests		N/A
4.4.3.7	Glass fixation tests		N/A
	Glass impact test (1J)		N/A
	Push/pull test (10 N)		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4.4.3.8	Thermoplastic material tests	(See Annex T.8)	P
4.4.3.9	Air comprising a safeguard	(See Annex T)	P
4.4.3.10	Accessibility, glass, safeguard effectiveness		P
4.4.4	Displacement of a safeguard by an insulating liquid		N/A
4.4.5	Safety interlocks		N/A
4.5	Explosion		P
4.5.1	General		P
4.5.2	No explosion during normal/abnormal operating condition	(See Clause B.2, B.3)	P
	No harm by explosion during single fault conditions	(See Clause B.4)	P
4.6	Fixing of conductors		P
	Fix conductors not to defeat a safeguard		P
	Compliance is checked by test.....: (See Clause T.2)		N/A
4.7	Equipment for direct insertion into mains socket-outlets		P
4.7.2	Mains plug part complies with relevant standard... :	See attachment plug test report for EU plug	P
4.7.3	Torque (Nm).....: (See Clause T.2)	Max. 0.056Nm	P
4.8	Equipment containing coin/button cell batteries		N/A
4.8.1	General	No coin cell.	N/A
4.8.2	Instructional safeguard.....: (See Clause T.2)		N/A
4.8.3	Battery compartment door/cover construction		N/A
	Open torque test		N/A
4.8.4.2	Stress relief test		N/A
4.8.4.3	Battery replacement test		N/A
4.8.4.4	Drop test		N/A
4.8.4.5	Impact test		N/A
4.8.4.6	Crush test		N/A
4.8.5	Compliance		N/A
	30N force test with test probe		N/A
	20N force test with test hook		N/A
4.9	Likelihood of fire or shock due to entry of conductive object		P
4.10	Component requirements		P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4.10.1	Disconnect Device	(See Annex L)	P
4.10.2	Switches and relays		N/A

5	ELECTRICALLY-CAUSED INJURY		P
5.2	Classification and limits of electrical energy sources		P
5.2.2	ES1, ES2 and ES3 limits		P
5.2.2.2	Steady-state voltage and current limits..... :	(See appended table 5.2)	P
5.2.2.3	Capacitance limits..... :	(See appended table 5.2)	P
5.2.2.4	Single pulse limits..... :	(See appended table 5.2)	N/A
5.2.2.5	Limits for repetitive pulses..... :	(See appended table 5.2)	N/A
5.2.2.6	Ringing signals	(See Annex H)	N/A
5.2.2.7	Audio signals	No such audio signals	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons	See only 4.3 and 5.3 to 5.5 which applies to protection between the accessible parts and hazardous parts of other circuits.	P
5.3.1 a)	Accessible ES1/ES2 derived from ES2/ES3 circuits		N/A
5.3.1 b)	Skilled persons not unintentional contact ES3 bare conductors		N/A
5.3.2.1	Accessibility to electrical energy sources and safeguards	Only ES1 circuit can be accessed for this product.	P
	Accessibility to outdoor equipment bare parts		N/A
5.3.2.2	Contact requirements	No openings allowing entry of a probe. No access with test probe to any ES3 circuit or parts.	P
	Test with test probe from Annex V		—
5.3.2.2 a)	Air gap – electric strength test potential (V)..... :	(See appended table 5.4.9)	N/A
5.3.2.2 b)	Air gap – distance (mm) :		N/A
5.3.2.3	Compliance		N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.4.1.2	Properties of insulating material	The choice and application have taken into account as specified in this Clause 5 and Annex T and natural rubber, hygroscopic materials or asbestos are not used as insulation.	P
5.4.1.3	Material is non-hygroscopic	Humidity conditioning test was conducted, refer to 5.4.8	P
5.4.1.4	Maximum operating temperature for insulating materials..... :	(See appended table 5.4.1.4)	P
5.4.1.5	Pollution degrees..... :	PD2	P
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling test		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage..... :	(See appended table 5.4.1.8)	P
5.4.1.9	Insulating surfaces		P
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		P
5.4.1.10.2	Vicat test..... :	(See appended table 5.4.1.10.2)	N/A
5.4.1.10.3	Ball pressure test..... :	(See appended table 5.4.1.10.3)	P
5.4.2	Clearances	The highest value of 5.4.3.3 and 5.4.2.3 be used.	P
5.4.2.1	General requirements		P
	Clearances in circuits connected to AC Mains, Alternative method	(See Annex X)	N/A
5.4.2.2	Procedure 1 for determining clearance		P
	Temporary overvoltage	2000Vpk	—
5.4.2.3	Procedure 2 for determining clearance		P
5.4.2.3.2.2	a.c. mains transient voltage..... :	2500Vpk	—
5.4.2.3.2.3	d.c. mains transient voltage		—
5.4.2.3.2.4	External circuit transient voltage..... :		—



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.4.2.3.2.5	Transient voltage determined by measurement..... :		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages		N/A
5.4.2.6	Clearance measurement..... :	(See appended table 5.4.2)	P
5.4.3	Creepage distances	(See appended table 5.4.2.2, 5.4.2.4 and 5.4.3)	P
5.4.3.1	General		P
5.4.3.3	Material group..... :	IIIb	--
5.4.3.4	Creepage distances measurement..... :	(See appended table 5.4.3)	P
5.4.4	Solid insulation		P
5.4.4.1	General requirements		P
5.4.4.2	Minimum distance through insulation	(See appended table 5.4.4.2)	P
5.4.4.3	Insulating compound forming solid insulation	No insulation compound forming solid insulation other than optical isolator.	P
5.4.4.4	Solid insulation in semiconductor devices	Certified optocoupler used. See in annex G.12	P
5.4.4.5	Insulating compound forming cemented joints		N/A
5.4.4.6	Thin sheet material	Insulation tape	P
5.4.4.6.1	General requirements		P
5.4.4.6.2	Separable thin sheet material	Reinforced insulation consisting of two layers of tape, each layer shall pass the electric strength test for reinforced insulation.	P
	Number of layers (pcs)	Min.2	P
5.4.4.6.3	Non-separable thin sheet material		N/A
	Number of layers (pcs)		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material..... :	(See appended table 5.4.9)	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components	Approved triple insulation wire used	P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.4.4.9	Solid insulation at frequencies >30 kHz, E_P , K_R , d , V_{PW} (V)..... :		N/A
	Alternative by electric strength test, tested voltage (V), K_R :	(See appended Tables 5.4.4.9 and 5.4.9)	P
5.4.5	Antenna terminal insulation		P
5.4.5.1	General		P
5.4.5.2	Voltage surge test		P
5.4.5.3	Insulation resistance ($M\Omega$)..... :	Input to output: 1000 $M\Omega$	P
	Electric strength test..... :	(See appended table 5.4.9)	P
5.4.6	Insulation of internal wire as part of supplementary safeguard		N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		P
	Relative humidity (%), temperature ($^{\circ}C$), duration (h)..... :	93%, 40 $^{\circ}C$, 120h	—
5.4.9	Electric strength test	(See appended table 5.4.9)	P
5.4.9.1	Test procedure for type test of solid insulation..... :	(See appended table 5.4.9)	P
5.4.9.2	Test procedure for routine test	Should be considered and conducted during production at factory.	N/A
5.4.10	Safeguards against transient voltages from external circuits	No connection to external circuits with transient voltage.	N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test..... :	(See appended table 5.4.9)	N/A
5.4.10.2.3	Steady-state test..... :	(See appended table 5.4.9)	N/A
5.4.10.3	Verification for insulation breakdown for impulse test..... :		N/A
5.4.11	Separation between external circuits and earth		N/A
5.4.11.1	Exceptions to separation between external circuits and earth	No such external circuit.	N/A
5.4.11.2	Requirements		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	SPDs bridge separation between external circuit and earth		N/A
	Rated operating voltage U_{op} (V).....:		—
	Nominal voltage U_{peak} (V).....:		—
	Max increase due to variation ΔU_{sp}		—
	Max increase due to ageing ΔU_{sa}		—
5.4.11.3	Test method and compliance.....:	(See appended table 5.4.9)	N/A
5.4.12	Insulating liquid		N/A
5.4.12.1	General requirements		N/A
5.4.12.2	Electric strength of an insulating liquid.....:	(See appended table 5.4.9)	N/A
5.4.12.3	Compatibility of an insulating liquid.....:	(See appended table 5.4.9)	N/A
5.4.12.4	Container for insulating liquid.....:		N/A
5.5	Components as safeguards		P
5.5.1	General		P
5.5.2	Capacitors and RC units	Approved X2 type and Y1 type capacitors provided. See G.11.1.	P
5.5.2.1	General requirement		P
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector.....:	(See appended table 5.5.2.2)	P
5.5.3	Transformers	(See Annex G.5.3)	P
5.5.4	Optocouplers	(See Annex G.12)	P
5.5.5	Relays		N/A
5.5.6	Resistors		N/A
5.5.7	SPDs		N/A
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable.....:		N/A
5.5.9	Safeguards for socket-outlets in outdoor equipment		N/A
	RCD rated residual operating current (mA).....:		—
5.6	Protective conductor		N/A
5.6.2	Requirement for protective conductors		N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm ²) :		—
	Protective earthing conductor serving as a reinforced safeguard		N/A
	Protective earthing conductor serving as a double safeguard		N/A
5.6.4	Requirements for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm ²)..... :		—
5.6.4.2	Protective current rating (A)..... :		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Terminal size for connecting protective earthing conductors (mm)..... :		N/A
	Terminal size for connecting protective bonding conductors (mm)..... :		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective bonding system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method..... :		N/A
5.6.6.3	Resistance (Ω) or voltage drop..... :		N/A
5.6.7	Reliable connection of a protective earthing conductor		N/A
5.6.8	Functional earthing		N/A
	Conductor size (mm ²)..... :		N/A
	Class II with functional earthing marking :		N/A
	Appliance inlet cl & cr (mm)..... :		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current		P
5.7.2.2	Measurement of voltage		P
5.7.3	Equipment set-up, supply connections and earth connections		P
5.7.4	Unearthed accessible parts..... :	(See appended table 5.7.4)	P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.7.5	Earthed accessible conductive parts..... :		N/A
5.7.6	Requirements when touch current exceeds ES2 limits		N/A
	Protective conductor current (mA)..... :		N/A
	Instructional Safeguard..... :		N/A
5.7.7	Prospective touch voltage and touch current associated with external circuits		N/A
5.7.7.1	Touch current from coaxial cables		N/A
5.7.7.2	Prospective touch voltage and touch current associated with paired conductor cables		N/A
5.7.8	Summation of touch currents from external circuits		N/A
	a) Equipment connected to earthed external circuits, current (mA)..... :		N/A
	b) Equipment connected to unearthed external circuits, current (mA)..... :		N/A
5.8	Backfeed safeguard in battery backed up supplies		N/A
	Mains terminal ES..... :		N/A
	Air gap (mm)..... :		N/A

6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of PS and PIS		P
6.2.2	Power source circuit classifications..... :	(See appended table 6.2.2)	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS :	(See appended table 6.2.3.1)	P
6.2.3.2	Resistive PIS :	(See appended table 6.2.3.2)	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials..... :	(See appended table B.1.5 and B.3, B.4)	P
	Combustible materials outside fire enclosure..... :		N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard method	Method by control of fire spread applied, Fire enclosure provided.	P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	Supplementary safeguards		N/A
6.4.3.2	Single Fault Conditions.....: Special conditions for temperature limited by fuse	(See appended table B.4)	N/A
6.4.4	Control of fire spread in PS1 circuits		N/A
6.4.5	Control of fire spread in PS2 circuits	See below	P
6.4.5.2	Supplementary safeguards	Compliance detailed as follows: - Printed board: min. V-1 - Components other than PCB and wires are: - mounted on PCB rated V-1 min, and/or - made of V-2/VTM-2 or better. - Isolating transformer: complying with G.5.3. (See appended tables 4.1.2 and Annex G for detail)	P
6.4.6	Control of fire spread in PS3 circuits	Refer to 6.4.5 and approved V-0 fire enclosure used.	P
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers	See below.	P
6.4.8.2	Fire enclosure and fire barrier material properties	V-0 fire enclosure used. USB plastic: Min. V-1.	P
6.4.8.2.1	Requirements for a fire barrier	No fire barrier.	N/A
6.4.8.2.2	Requirements for a fire enclosure	V-0 fire enclosure used. USB plastic: Min. V-1.	P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier	No opening and fire barrier	P
6.4.8.3.1	Fire enclosure and fire barrier openings	No Fire enclosure opening	N/A
6.4.8.3.2	Fire barrier dimensions	No fire barrier	N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
6.4.8.3.3	Top openings and properties		N/A
	Openings dimensions (mm)..... :	No openings.	N/A
6.4.8.3.4	Bottom openings and properties		N/A
	Openings dimensions (mm)..... :	No openings.	N/A
	Flammability tests for the bottom of a fire enclosure	(See Clause S.3)	N/A
	Instructional Safeguard..... :		N/A
6.4.8.3.5	Side openings and properties		N/A
	Openings dimensions (mm)..... :	No openings.	N/A
6.4.8.3.6	Integrity of a fire enclosure, condition met: a), b) or c)..... :		N/A
6.4.8.4	Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating..... :	Fire enclosure material V-0 min.	P
6.4.9	Flammability of insulating liquid..... :		N/A
6.5	Internal and external wiring		P
6.5.1	General requirements	The Internal wire (VW-1) are complied to UL 758 standard, which test method and testing condition equal to IEC/EN 60695-11-2 (See table 4.1.2).	P
6.5.2	Requirements for interconnection to building wiring..... :		N/A
6.5.3	Internal wiring size (mm ²) for socket-outlets..... :		N/A
6.6	Safeguards against fire due to the connection to additional equipment		P
7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		N/A
7.2	Reduction of exposure to hazardous substances		N/A
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards or personal protective equipment (PPE)		N/A
	Personal safeguards and instructions..... :		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)..... :		—
7.6	Batteries and their protection circuits		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

8	MECHANICALLY-CAUSED INJURY		P
8.2	Mechanical energy source classifications		P
8.3	Safeguards against mechanical energy sources		N/A
8.4	Safeguards against parts with sharp edges and corners		N/A
8.4.1	Safeguards		N/A
	Instructional Safeguard.....:		N/A
8.4.2	Sharp edges or corners	Equipment mass, edges and corners are classed as MS1.	N/A
8.5	Safeguards against moving parts		N/A
8.5.1	Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts	No moving parts.	N/A
	MS2 or MS3 part required to be accessible for the function of the equipment	See above.	N/A
	Moving MS3 parts only accessible to skilled person		N/A
8.5.2	Instructional safeguard.....:		N/A
8.5.4	Special categories of equipment containing moving parts		N/A
8.5.4.1	General		N/A
8.5.4.2	Equipment containing work cells with MS3 parts		N/A
8.5.4.2.1	Protection of persons in the work cell		N/A
8.5.4.2.2	Access protection override		N/A
8.5.4.2.2.1	Override system		N/A
8.5.4.2.2.2	Visual indicator		N/A
8.5.4.2.3	Emergency stop system		N/A
	Maximum stopping distance from the point of activation (m).....:		N/A
	Space between end point and nearest fixed mechanical part (mm).....:		N/A
8.5.4.2.4	Endurance requirements		N/A
	Mechanical system subjected to 100 000 cycles of operation		N/A
	- Mechanical function check and visual inspection		N/A
	- Cable assembly.....:		N/A
8.5.4.3	Equipment having electromechanical device for destruction of media		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
8.5.4.3.1	Equipment safeguards		N/A
8.5.4.3.2	Instructional safeguards against moving parts..... :		N/A
8.5.4.3.3	Disconnection from the supply		N/A
8.5.4.3.4	Cut type and test force (N)..... :		N/A
8.5.4.3.5	Compliance		N/A
8.5.5	High pressure lamps	No high pressure lamps used.	N/A
	Explosion test..... :		N/A
8.5.5.3	Glass particles dimensions (mm)..... :		N/A
8.6	Stability of equipment		N/A
8.6.1	General	MS1: Mass of the unit	N/A
	Instructional safeguard..... :		N/A
8.6.2	Static stability		N/A
8.6.2.2	Static stability test..... :		N/A
8.6.2.3	Downward force test		N/A
8.6.3	Relocation stability		N/A
	Wheels diameter (mm)..... :		—
	Tilt test		N/A
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test..... :		N/A
8.7	Equipment mounted to wall, ceiling or other structure		N/A
8.7.1	Mount means type..... :	No wall or ceiling	N/A
8.7.2	Test methods		N/A
	Test 1, additional downwards force (N)..... :		N/A
	Test 2, number of attachment points and test force (N)..... :		N/A
	Test 3 Nominal diameter (mm) and applied torque (Nm)..... :		N/A
8.8	Handles strength		N/A
8.8.1	General	No handles	N/A
8.8.2	Handle strength test		N/A
	Number of handles..... :		—
	Force applied (N)..... :		—



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

8.9	Wheels or casters attachment requirements		N/A
8.9.2	Pull test	No such parts	N/A
8.10	Carts, stands and similar carriers		N/A
8.10.1	General	No carts, stands or similar carriers	N/A
8.10.2	Marking and instructions.....:		N/A
8.10.3	Cart, stand or carrier loading test		N/A
	Loading force applied (N).....:		N/A
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Force applied (N).....:		—
8.10.6	Thermoplastic temperature stability		N/A
8.11	Mounting means for slide-rail mounted equipment (SRME)		N/A
8.11.1	General	No such parts	N/A
8.11.2	Requirements for slide rails		N/A
	Instructional Safeguard.....:		N/A
8.11.3	Mechanical strength test		N/A
8.11.3.1	Downward force test, force (N) applied.....:		N/A
8.11.3.2	Lateral push force test		N/A
8.11.3.3	Integrity of slide rail end stops		N/A
8.11.4	Compliance		N/A
8.12	Telescoping or rod antennas		N/A
	Button/ball diameter (mm).....:	No such parts	—

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications		P
9.3	Touch temperature limits		P
9.3.1	Touch temperatures of accessible parts.....:	(See appended table 5.4.1.4)	P
9.3.2	Test method and compliance		P
9.4	Safeguards against thermal energy sources		P
9.5	Requirements for safeguards		P
9.5.1	Equipment safeguard	Enclosure	P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
9.5.2	Instructional safeguard..... :	Instructional safeguard is not required	N/A
9.6	Requirements for wireless power transmitters		N/A
9.6.1	General		N/A
9.6.2	Specification of the foreign objects		N/A
9.6.3	Test method and compliance..... :		N/A
10	RADIATION		N/A
10.2	Radiation energy source classification		N/A
10.2.1	General classification		N/A
	Lasers..... :		—
	Lamps and lamp systems..... :		—
	Image projectors..... :		—
	X-Ray..... :		—
	Personal music player..... :		—
10.3	Safeguards against laser radiation		N/A
	The standard(s) equipment containing laser(s) comply..... :	No laser radiation	N/A
10.4	Safeguards against optical radiation from lamps and lamp systems (including LED types)		N/A
10.4.1	General requirements		N/A
	Instructional safeguard provided for accessible radiation level needs to exceed		N/A
	Risk group marking and location..... :		N/A
	Information for safe operation and installation		N/A
10.4.2	Requirements for enclosures		N/A
	UV radiation exposure..... :		N/A
10.4.3	Instructional safeguard..... :		N/A
10.5	Safeguards against X-radiation		N/A
10.5.1	Requirements		N/A
	Instructional safeguard for skilled persons..... :		—
10.5.3	Maximum radiation (pA/kg)..... :		—
10.6	Safeguards against acoustic energy sources		N/A
10.6.1	General	No such equipment	N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
10.6.2	Classification		N/A
	Acoustic output $L_{Aeq,T}$, dB(A)..... :		N/A
	Unweighted RMS output voltage (mV)..... :		N/A
	Digital output signal (dBFS)..... :		N/A
10.6.3	Requirements for dose-based systems		N/A
10.6.3.1	General requirements		N/A
10.6.3.2	Dose-based warning and automatic decrease		N/A
10.6.3.3	Exposure-based warning and requirements		N/A
	30 s integrated exposure level (MEL30)..... :		N/A
	Warning for MEL \geq 100 dB(A)..... :		N/A
10.6.4	Measurement methods		N/A
10.6.5	Protection of persons		N/A
	Instructional safeguards..... :		N/A
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input		N/A
	Listening device input voltage (mV)..... :		N/A
10.6.6.2	Corded listening devices with digital input		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A)..... :		N/A
10.6.6.3	Cordless listening devices		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A)..... :		N/A

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.1	General		P
B.1.5	Temperature measurement conditions	(See appended table B.1.5)	P
B.2	Normal operating conditions		P
B.2.1	General requirements..... :	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers..... :	(See Annex E)	N/A
B.2.3	Supply voltage and tolerances	Rated voltage \pm 10 %	P
B.2.5	Input test..... :	(See appended table B.2.5)	P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
B.3	Simulated abnormal operating conditions		P
B.3.1	General	(See appended table B.3)	P
B.3.2	Covering of ventilation openings	No openings	N/A
	Instructional safeguard..... :	Instructional safeguard is not required.	N/A
B.3.3	DC mains polarity test		N/A
B.3.4	Setting of voltage selector	No voltage selector used.	N/A
B.3.5	Maximum load at output terminals	(See appended table B.3, B.4)	P
B.3.6	Reverse battery polarity	No such battery	N/A
B.3.7	Audio amplifier abnormal operating conditions		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions..... :	All safeguards remained effective	P
B.4	Simulated single fault conditions		P
B.4.1	General		P
B.4.2	Temperature controlling device	No such device used.	N/A
B.4.3	Blocked motor test	No motors used.	N/A
B.4.4	Functional insulation	(See appended table B.3, B.4)	P
B.4.4.1	Short circuit of clearances for functional insulation	(See appended table B.3, B.4)	P
B.4.4.2	Short circuit of creepage distances for functional insulation	(See appended table B.3, B.4)	P
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors	(See appended table B.3, B.4)	P
B.4.6	Short circuit or disconnection of passive components	(See appended table B.3, B.4)	P
B.4.7	Continuous operation of components	The EUT is continuous operating type and no such components intended for short time operation or intermittent operation	N/A
B.4.8	Compliance during and after single fault conditions..... :	(See appended table B.3, B.4)	P
B.4.9	Battery charging and discharging under single fault conditions	(See Annex M)	N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements	No such UV generated from the equipment.	N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus..... :		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure test		N/A
C.2.4	Xenon-arc light-exposure test		N/A
D	TEST GENERATORS		P
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		P
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Electrical energy source classification for audio signals		N/A
	Maximum non-clipped output power (W)..... :		—
	Rated load impedance (Ω)		—
	Open-circuit output voltage (V)..... :		—
	Instructional safeguard..... :		—
E.2	Audio amplifier normal operating conditions		N/A
	Audio signal source type..... :		—
	Audio output power (W)..... :		—
	Audio output voltage (V)..... :		—
	Rated load impedance (Ω)		—
	Requirements for temperature measurement		N/A
E.3	Audio amplifier abnormal operating conditions		N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General		P
	Language	English	—
F.2	Letter symbols and graphical symbols		P




EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
F.2.1	Letter symbols according to IEC60027-1	Letter symbols for quantities and units are complied with IEC 60027-1.	P
F.2.2	Graphic symbols according to IEC, ISO or manufacturer specific	Graphical symbols are complied with IEC 60417, ISO 3864-2, ISO 7000 or ISO 7010.	P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	The required marking is located on the enclosure of the equipment and is easily visible.	P
F.3.2	Equipment identification markings	See copy of marking plate.	P
F.3.2.1	Manufacturer identification	See copy of marking plate	P
F.3.2.2	Model identification	See copy of marking plate	P
F.3.3	Equipment rating markings	See the following details.	P
F.3.3.1	Equipment with direct connection to mains	The equipment is direct connected to AC mains, see F.3.3.3 to F.3.3.6.	P
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of the supply voltage.....	See copy of marking plate	P
F.3.3.4	Rated voltage.....	See copy of marking plate	P
F.3.3.5	Rated frequency.....	See copy of marking plate	P
F.3.3.6	Rated current or rated power.....	See copy of marking plate	P
F.3.3.7	Equipment with multiple supply connections	Only one mains supply connection provided.	N/A
F.3.4	Voltage setting device	No voltage setting device.	N/A
F.3.5	Terminals and operating devices	See below.	P
F.3.5.1	Mains appliance outlet and socket-outlet markings	No outlet used.	N/A
F.3.5.2	Switch position identification marking.....		N/A
F.3.5.3	Replacement fuse identification and rating markings.....	The fuse is located within the equipment and not intended to be replaceable, fuse ratings need not be marked.	N/A
	Instructional safeguards for neutral fuse.....		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
F.3.5.4	Replacement battery identification marking..... :		N/A
F.3.5.5	Neutral conductor terminal		N/A
F.3.5.6	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		P
F.3.6.1	Class I equipment	Class II	N/A
F.3.6.1.1	Protective earthing conductor terminal..... :		N/A
F.3.6.1.2	Protective bonding conductor terminals :		N/A
F.3.6.2	Equipment class marking..... :	Class II equipment without functional earth. Symbol  used.	P
F.3.6.3	Functional earthing terminal marking..... :		N/A
F.3.7	Equipment IP rating marking..... :	IPX0, no need marking	N/A
F.3.8	External power supply output marking..... :	See copy of marking plate.	P
F.3.9	Durability, legibility and permanence of marking	Marking is considered to be legible and easily discernible. See also the following details.	P
F.3.10	Test for permanence of markings	The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 sec. And then again for 15 sec. With the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling and lifting of the label edge.	P
F.4	Instructions		P
	a) Information prior to installation and initial use		P
	b) Equipment for use in locations where children not likely to be present		N/A
	c) Instructions for installation and interconnection		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Equipment intended to be fastened in place		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	f) Instructions for audio equipment terminals		N/A
	g) Protective earthing used as a safeguard		N/A
	h) Protective conductor current exceeding ES2 limits		N/A
	i) Graphic symbols used on equipment		P
	j) Permanently connected equipment not provided with all-pole mains switch		N/A
	k) Replaceable components or modules providing safeguard function		N/A
	l) Equipment containing insulating liquid		N/A
	m) Installation instructions for outdoor equipment		N/A
F.5	Instructional safeguards		N/A
G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General	No switches used	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.1.3	Test method and compliance		N/A
G.2	Relays		N/A
G.2.1	Requirements	No relay used.	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supplying power to other equipment		N/A
G.2.4	Test method and compliance		N/A
G.3	Protective devices		P
G.3.1	Thermal cut-offs	No thermal cut-offs provided within the equipment.	N/A
	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Test method and compliance		N/A
G.3.2	Thermal links	No thermal links used.	N/A
G.3.2.1	a) Thermal links tested separately according to IEC 60691 with specifics		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	b) Thermal links tested as part of the equipment		N/A
G.3.2.2	Test method and compliance		N/A
G.3.3	PTC thermistors		N/A
G.3.4	Overcurrent protection devices	Fuse complied with IEC 60127	P
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions..... :	(See appended table B.4)	N/A
G.4	Connectors		P
G.4.1	Spacings		P
G.4.2	Mains connector configuration..... :	Mains plug complied with EN 50075.	P
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely	Output connector with a shape that insertion into a mains connector or socket is unlikely to occur.	P
G.5	Wound components		P
G.5.1	Wire insulation in wound components	Approved triple insulation wires (TIW) used for secondary winding of Transformer	P
G.5.1.2	Protection against mechanical stress	Achieved by providing physical separation in the form of Triple insulation wires and also by insulating tube and insulation tape.	P
G.5.2	Endurance test		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Test time (days per cycle)..... :		—
	Test temperature (°C)..... :		—
G.5.2.3	Wound components supplied from the mains		N/A
G.5.2.4	No insulation breakdown		N/A
G.5.3	Transformers		P
G.5.3.1	Compliance method..... :	See G.5.3.2 and G.5.3.3.	P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Position.....:	See appended table 4.1.2.	P
	Method of protection..... :	Over current protection by circuit design.	P
G.5.3.2	Insulation	Primary windings and secondary windings are separated by reinforced insulation.	P
	Protection from displacement of windings.....:	By bobbin and insulating tape	—
G.5.3.3	Transformer overload tests	(See appended table B.3, B.4)	P
G.5.3.3.1	Test conditions	Tested in the complete equipment as an SMPS.	P
G.5.3.3.2	Winding temperatures	(See appended table B.3, B.4)	P
G.5.3.3.3	Winding temperatures - alternative test method	Alternative test method was not considered.	N/A
G.5.3.4	Transformers using FIW		N/A
G.5.3.4.1	General		N/A
	FIW wire nominal diameter..... :		—
G.5.3.4.2	Transformers with basic insulation only		N/A
G.5.3.4.3	Transformers with double insulation or reinforced insulation..... :		N/A
G.5.3.4.4	Transformers with FIW wound on metal or ferrite core		N/A
G.5.3.4.5	Thermal cycling test and compliance		N/A
G.5.3.4.6	Partial discharge test		N/A
G.5.3.4.7	Routine test		N/A
G.5.4	Motors	No motors used.	N/A
G.5.4.1	General requirements		N/A
G.5.4.2	Motor overload test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4.2	Locked-rotor overload test		N/A
	Test duration (days) :		—
G.5.4.5	Running overload test for DC motors		N/A
G.5.4.5.2	Tested in the unit		N/A
G.5.4.5.3	Alternative method		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
G.5.4.6	Locked-rotor overload test for DC motors		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A
G.5.4.6.3	Alternative method		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		—
G.6	Wire Insulation		P
G.6.1	General	Triple insulated winding in transformer secondary windings used as reinforced safeguard in the isolating transformer that has separately complied with Annex J.	P
G.6.2	Enamelled winding wire insulation	Insulation does not rely on solvent-based enamel.	N/A
G.7	Mains supply cords		N/A
G.7.1	General requirements		N/A
	Type.....		—
G.7.2	Cross sectional area (mm ² or AWG).....		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N).....		N/A
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm).....		N/A
G.7.3.2.4	Strain relief and cord anchorage material		N/A
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Test method and compliance		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Overall diameter or minor overall dimension, D (mm).....:		—
	Radius of curvature after test (mm).....:		—
G.7.6	Supply wiring space		N/A
G.7.6.1	General requirements		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Requirements		N/A
G.7.6.2.2	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements		N/A
G.8.2	Safeguards against fire		N/A
G.8.2.1	General		N/A
G.8.2.2	Varistor overload test		N/A
G.8.2.3	Temporary overvoltage test		N/A
G.9	Integrated circuit (IC) current limiters		N/A
G.9.1	Requirements		N/A
	IC limiter output current (max. 5A).....:		—
	Manufacturers' defined drift		—
G.9.2	Test Program		N/A
G.9.3	Compliance		N/A
G.10	Resistors		N/A
G.10.1	General		N/A
G.10.2	Conditioning		N/A
G.10.3	Resistor test		N/A
G.10.4	Voltage surge test		N/A
G.10.5	Impulse test		N/A
G.10.6	Overload test		N/A
G.11	Capacitors and RC units		P
G.11.1	General requirements	(See appended table 4.1.2)	P
G.11.2	Conditioning of capacitors and RC units	(See appended table 4.1.2)	P
G.11.3	Rules for selecting capacitors		P
G.12	Optocouplers		P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Optocouplers comply with IEC 60747-5-5 with specifics	Approved optocoupler used. Detail see table 4.1.2	P
	Type test voltage $V_{ini,a}$:	Detail see table 4.1.2	—
	Routine test voltage, $V_{ini,b}$:	Detail see table 4.1.2	—
G.13	Printed boards		P
G.13.1	General requirements	Approved Printed board used	P
G.13.2	Uncoated printed boards	The insulation between conductors on the outer surfaces of an uncoated printed board complied with the minimum clearance and creepage requirements	P
G.13.3	Coated printed boards	No coated printed board or multilayer board applied for within the equipment.	N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation..... :		N/A
	Number of insulation layers (pcs) :		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2	Test method and compliance		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements :		N/A
G.15	Pressurized liquid filled components		N/A
G.15.1	Requirements		N/A
G.15.2	Test methods and compliance		N/A
G.15.2.1	Hydrostatic pressure test		N/A
G.15.2.2	Creep resistance test		N/A
G.15.2.3	Tubing and fittings compatibility test		N/A
G.15.2.4	Vibration test		N/A
G.15.2.5	Thermal cycling test		N/A
G.15.2.6	Force test		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
G.15.3	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
G.16.1	Condition for fault tested is not required		N/A
	ICX with associated circuitry tested in equipment		N/A
	ICX tested separately		N/A
G.16.2	Tests		N/A
	Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test..... :		—
	Mains voltage that impulses to be superimposed on :		—
	Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test..... :		—
G.16.3	Capacitor discharge test..... :		N/A
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General		N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz) :		—
H.3.1.2	Voltage (V) :		—
H.3.1.3	Cadence; time (s) and voltage (V) :		—
H.3.1.4	Single fault current (mA):..... :		—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V)..... :		N/A
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		P
J.1	General		P
	Winding wire insulation..... :	Certified triple insulation wire used as secondary winding. (See appended table 4.1.2)	—



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Solid round winding wire, diameter (mm)..... :		N/A
	Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm ²)..... :		N/A
J.2/J.3	Tests and Manufacturing		—
K	SAFETY INTERLOCKS		N/A
K.1	General requirements		N/A
	Instructional safeguard..... :		N/A
K.2	Components of safety interlock safeguard mechanism		N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
K.5.1	Under single fault condition		N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Test method and compliance..... :		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements		N/A
	In circuit connected to mains, separation distance for contact gaps (mm)..... :		N/A
	In circuit isolated from mains, separation distance for contact gaps (mm)..... :		N/A
	Electric strength test before and after the test of K.7.2..... :	(See appended table 5.4.9)	N/A
K.7.2	Overload test, Current (A)..... :		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A
L	DISCONNECT DEVICES		P
L.1	General requirements	AC plug used as disconnect device	P
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		N/A
L.4	Single-phase equipment		P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		P
L.8	Multiple power sources		N/A
	Instructional safeguard..... :		N/A
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		N/A
M.1	General requirements		N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Batteries and their cells comply with relevant IEC standards..... :	No such battery used	N/A
M.3	Protection circuits for batteries provided within the equipment		N/A
M.3.1	Requirements		N/A
M.3.2	Test method		N/A
	Overcharging of a rechargeable battery		N/A
	Excessive discharging		N/A
	Unintentional charging of a non-rechargeable battery		N/A
	Reverse charging of a rechargeable battery		N/A
M.3.3	Compliance		N/A
M.4	Additional safeguards for equipment containing a portable secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Requirements		N/A
M.4.2.2	Compliance..... :		N/A
M.4.3	Fire enclosure..... :		N/A
M.4.4	Drop test of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation and procedure for the drop test		N/A
M.4.4.3	Drop, Voltage on reference and dropped batteries (V); voltage difference during 24 h period (%): :		N/A
M.4.4.4	Check of the charge/discharge function		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
M.4.4.5	Charge / discharge cycle test		N/A
M.4.4.6	Compliance		N/A
M.5	Risk of burn due to short-circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Test method and compliance		N/A
M.6	Safeguards against short-circuits		N/A
M.6.1	External and internal faults		N/A
M.6.2	Compliance		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
	Calculated hydrogen generation rate..... :		N/A
M.7.2	Test method and compliance		N/A
	Minimum air flow rate, Q (m ³ /h)..... :		N/A
M.7.3	Ventilation tests		N/A
M.7.3.1	General		N/A
M.7.3.2	Ventilation test – alternative 1		N/A
	Hydrogen gas concentration (%)..... :		N/A
M.7.3.3	Ventilation test – alternative 2		N/A
	Obtained hydrogen generation rate..... :		N/A
M.7.3.4	Ventilation test – alternative 3		N/A
	Hydrogen gas concentration (%)..... :		N/A
M.7.4	Marking..... :		N/A
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte		N/A
M.8.1	General		N/A
M.8.2	Test method		N/A
M.8.2.1	General		N/A
M.8.2.2	Estimation of hypothetical volume V _z (m ³ /s)..... :		—
M.8.2.3	Correction factors..... :		—
M.8.2.4	Calculation of distance d (mm) :		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse		N/A
	Instructional safeguard..... :		N/A
N	ELECTROCHEMICAL POTENTIALS		N/A
	Material(s) used..... :		—
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		P
	Value of X (mm)..... :	Pollution degree considered	—
P	SAFEGUARDS AGAINST CONDUCTIVE OBJECTS		P
P.1	General		P
P.2	Safeguards against entry or consequences of entry of a foreign object		P
P.2.1	General		P
P.2.2	Safeguards against entry of a foreign object		N/A
	Location and Dimensions (mm) :	No openings	—
P.2.3	Safeguards against the consequences of entry of a foreign object		N/A
P.2.3.1	Safeguard requirements		N/A
	The ES3 and PS3 keep-out volume in Figure P.3 not applicable to transportable equipment		N/A
	Transportable equipment with metalized plastic parts..... :		N/A
P.2.3.2	Consequence of entry test..... :		N/A
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Compliance		N/A
P.4	Metallized coatings and adhesives securing parts		N/A
P.4.1	General		N/A
P.4.2	Tests		N/A
	Conditioning, T _c (°C)..... :		—
	Duration (weeks)..... :		—



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		P
Q.1	Limited power sources	See appended table Annex Q.1	P
Q.1.1	Requirements		P
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output	A regulating network limits the output in compliance with table Q.1 both under normal operating conditions and after any single fault.	P
	d) Overcurrent protective device limited output		N/A
	e) IC current limiter complying with G.9		N/A
Q.1.2	Test method and compliance.....:	See appended table Annex Q.1	P
	Current rating of overcurrent protective device (A)		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A)		N/A
	Current limiting method.....:		—
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General		N/A
R.2	Test setup		N/A
	Overcurrent protective device for test.....:		—
R.3	Test method		N/A
	Cord/cable used for test.....:		—
R.4	Compliance		N/A
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material.....:		—
	Wall thickness (mm).....:		—
	Conditioning (°C).....:		—



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material.....:		—
	Wall thickness (mm).....:		—
	Conditioning (°C).....:		—
S.3	Flammability test for the bottom of a fire enclosure		N/A
S.3.1	Mounting of samples		N/A
S.3.2	Test method and compliance		N/A
	Mounting of samples		—
	Wall thickness (mm).....:		—
S.4	Flammability classification of materials	See Table 4.1.2 only.	N/A
S.5	Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W		N/A
	Samples, material.....:		—
	Wall thickness (mm).....:		—
	Conditioning (°C).....:		—
T	MECHANICAL STRENGTH TESTS		P
T.1	General		P
T.2	Steady force test, 10 N	(See appended table T.2, T.3, T.4, T.5)	P
T.3	Steady force test, 30 N		N/A
T.4	Steady force test, 100 N	(See appended table T.2, T.3, T.4, T.5)	P
T.5	Steady force test, 250 N		N/A
T.6	Enclosure impact test		N/A
	Fall test		N/A
	Swing test		N/A
T.7	Drop test	(See appended table T.7)	P



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
T.8	Stress relief test..... :	(See appended table T.8)	P
T.9	Glass Impact Test..... :		N/A
T.10	Glass fragmentation test		N/A
	Number of particles counted..... :	No such glass	N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm) :	No such antennas provided within the equipment.	N/A
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General		N/A
	Instructional safeguard :	No CRT provided within the equipment.	N/A
U.2	Test method and compliance for non-intrinsically protected CRTs		N/A
U.3	Protective screen		N/A
V	DETERMINATION OF ACCESSIBLE PARTS		P
V.1	Accessible parts of equipment		P
V.1.1	General		P
V.1.2	Surfaces and openings tested with jointed test probes		P
V.1.3	Openings tested with straight unjointed test probes		N/A
V.1.4	Plugs, jacks, connectors tested with blunt probe		P
V.1.5	Slot openings tested with wedge probe		N/A
V.1.6	Terminals tested with rigid test wire		P
V.2	Accessible part criterion		P
X	ALTERNATIVE METHOD FOR DETERMINING CLEARANCES FOR INSULATION IN CIRCUITS CONNECTED TO AN AC MAINS NOT EXCEEDING 420 V PEAK (300 V RMS)		N/A
	Clearance..... :	(See appended table X)	N/A
Y	CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES		N/A
Y.1	General		N/A
	Indoor equipment		N/A
Y.2	Resistance to UV radiation		N/A
Y.3	Resistance to corrosion		N/A
Y.3	Resistance to corrosion		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
Y.3.1	Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by..... :		N/A
Y.3.2	Test apparatus		N/A
Y.3.3	Water – saturated sulphur dioxide atmosphere		N/A
Y.3.4	Test procedure..... :		N/A
Y.3.5	Compliance		N/A
Y.4	Gaskets		N/A
Y.4.1	General		N/A
Y.4.2	Gasket tests		N/A
Y.4.3	Tensile strength and elongation tests		N/A
	Alternative test methods..... :		N/A
Y.4.4	Compression test		N/A
Y.4.5	Oil resistance		N/A
Y.4.6	Securing means	(See Annex P.4)	N/A
Y.5	Protection of equipment within an outdoor enclosure		N/A
Y.5.1	General		N/A
Y.5.2	Protection from moisture		N/A
	Relevant tests of IEC 60529 or Y.5.3..... :		N/A
Y.5.3	Water spray test		N/A
Y.5.4	Protection from plants and vermin		N/A
Y.5.5	Protection from excessive dust		N/A
Y.5.5.1	General		N/A
Y.5.5.2	IP5X equipment		N/A
Y.5.5.3	IP6X equipment		N/A
Y.6	Mechanical strength of enclosures		N/A
Y.6.1	General		N/A
Y.6.2	Impact test..... :		N/A



EN IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62368-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment - Part 1: Safety requirements)			
Differences according to.....: EN IEC 62368-1:2020+A11:2020			
Attachment Form No.....: EU_GD_IEC62368_1E			
Attachment Originator.....: UL(Demko)			
Master Attachment.....: 2021-02-04			
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		P
	Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2020+A11:2020. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2018. Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed "Z".		P
	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (informative) A-deviations Annex ZD (informative) IEC and CENELEC code designations for flexible cords		P
1	Modification to Clause 3.		N/A
3.3.19	Sound exposure <i>Replace 3.3.19 of IEC 62368-1 with the following definitions:</i>		N/A
3.3.19.1	momentary exposure level, MEL metric for estimating 1 s sound exposure level from the HD 483-1 S2 test signal applied to both channels, based on EN 50332-1:2013, 4.2. Note 1 to entry: MEL is measured as A-weighted levels in dB. Note 2 to entry: See B.3 of EN 50332-3:2017 for additional information.	Not such equipment	N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
3.3.19.3	<p>sound exposure, E A-weighted sound pressure (p) squared and integrated over a stated period of time, T</p> <p>Note 1 to entry: The SI unit is Pa² s.</p> $E = \int_0^T p(t)^2 dt$		N/A
3.3.19.4	<p>sound exposure level, SEL logarithmic measure of sound exposure relative to a reference value, E_0, typically the 1 kHz threshold of hearing in humans.</p> <p>Note 1 to entry: SEL is measured as A-weighted levels in dB.</p> $SEL = 10 \lg \left(\frac{E}{E_0} \right) \text{ dB}$ <p>Note 2 to entry: See B.4 of EN 50332-3:2017 for additional information.</p>		N/A
3.3.19.5	<p>digital signal level relative to full scale, dBFS levels reported in dBFS are always r.m.s. Full scale level, 0 dBFS, is the level of a dc-free 997-Hz sine wave whose undithered positive peak value is positive digital full scale, leaving the code corresponding to negative digital full scale unused</p> <p>Note 1 to entry: It is invalid to use dBFS for non-r.m.s. levels. Because the definition of full scale is based on a sine wave, the level of signals with a crest factor lower than that of a sine wave may exceed 0 dBFS. In particular, square wave signals may reach +3,01 dBFS.</p>		N/A
2	<p>Modification to Clause 10</p>		N/A
10.6	<p>Safeguards against acoustic energy sources Replace 10.6 of IEC 62368-1 with the following:</p>		N/A
10.6.1.1	<p>Introduction Safeguard requirements for protection against long-term exposure to excessive sound pressure levels from personal music players closely coupled to the ear are specified below. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an ordinary person, that:</p> <ul style="list-style-type: none"> – is designed to allow the user to listen to audio or 		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>audiovisual content / material; and</p> <ul style="list-style-type: none"> – uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and – has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.). <p>EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment.</p> <p>Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3.</p> <p>NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360.</p> <p>NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible.</p> <p>Listening devices sold separately shall comply with the requirements of 10.6.6. These requirements are valid for music or video mode only. The requirements do not apply to:</p> <ul style="list-style-type: none"> – professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> – hearing aid equipment and other devices for assistive listening; – the following type of analogue personal music players: <ul style="list-style-type: none"> • long distance radio receiver (for example, a multiband radio receiver or world band radio receiver, an AM radio receiver), and • cassette player/recorder; <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <ul style="list-style-type: none"> – a player while connected to an external amplifier 		



EN IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>that does not allow the user to walk around while in use.</p> <p>For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply.</p> <p>The relevant requirements are given in EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		
10.6.1.2	<p>Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body mounted devices, attention is drawn to EN 50360 and EN 50566.</p>		N/A
10.6.2	<p>Classification of devices without the capacity to estimate sound dose</p>		N/A
10.6.2.1	<p>General</p> <p>This standard is transitioning from short-term based (30 s) requirements to long-term based (40 hour) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3.</p> <p>For classifying the acoustic output $LA_{eq,T}$, measurements are based on the A-weighted equivalent sound pressure level over a 30 s period.</p> <p>For music where the average sound pressure (long term $LA_{eq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In this case, T becomes the duration of the song.</p> <p>NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term $LA_{eq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the required limit.</p> <p>For example, if the player is set with the programme simulation noise to 85 dB, but the</p>		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.		
10.6.2.2	RS1 limits (to be superseded, see 10.6.3.2) RS1 is a class 1 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 85 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or -25 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1. – The RS1 limits will be updated for all devices as per 10.6.3.2.		N/A
10.6.2.3	RS2 limits (to be superseded, see 10.6.3.3) RS2 is a class 2 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic 130 detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 100 dB(A) when playing the fixed “programme simulation noise” as described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 150 mV (analogue interface) or -10 dBFS (digital interface) when playing the fixed “programme simulation noise” as described in EN 50332-1.		N/A
10.6.2.4	RS3 limits RS3 is a class 3 acoustic energy source that exceeds RS2 limits.		N/A
10.6.3	Classification of devices (new)		N/A





EN IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.3.1	General Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision of 23 June 2009, are given below.		N/A
10.6.3.2	RS1 limits (new) RS1 is a class 1 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1.		N/A
10.6.3.3	RS2 limits (new) RS2 is a class 2 acoustic energy source that does not exceed the following: – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3, shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN50332-3, shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1.		N/A
10.6.4	Requirements for maximum sound exposure		N/A
10.6.4.1	Measurement methods All volume controls shall be turned to maximum during tests. Measurements shall be made in accordance with		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<p>10.6.4.2</p>	<p>EN 50332-1 or EN 50332-2 as applicable.</p> <p>Protection of persons</p> <p>Except as given below, protection requirements for parts accessible to ordinary persons, instructed persons and skilled persons are given in 4.3.</p> <p>NOTE 1 Volume control is not considered a safeguard.</p> <p>Between RS2 and an ordinary person, the basic safeguard may be replaced by an instructional safeguard in accordance with Clause F.5, except that the instructional safeguard shall be placed on the equipment, or on the packaging, or in the instruction manual.</p> <p>Alternatively, the instructional safeguard may be given through the equipment display during use.</p> <p>The elements of the instructional safeguard shall be as follows:</p> <div style="text-align: center;">  </div> <ul style="list-style-type: none"> – element 1a: the symbol , IEC 60417-6044 (2011-01) – element 2: “High sound pressure” or equivalent wording – element 3: “Hearing damage risk” or equivalent wording – element 4: “Do not listen at high volume levels for long periods.” or equivalent wording <p>An equipment safeguard shall prevent exposure of an ordinary person to an RS2 source without intentional physical action from the ordinary person and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off.</p> <p>The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output exceeding RS1. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output exceeding RS1. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time.</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched</p>		N/A
------------------------	--	--	-----



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	off. A skilled person shall not be unintentionally exposed to RS3.		
10.6.5	Requirements for dose-based systems		N/A
10.6.5.1	<p>General requirements</p> <p>Personal music players shall give the warnings as provided below when tested according to EN 50332-3, using the limits from this clause.</p> <p>The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such optional settings are offered, an administrator (for example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration.</p> <p>The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.</p>		N/A
10.6.5.2	<p>Dose-based warning and requirements</p> <p>When a dose of 100 % CSD is reached, and at least at every 100 % further increase of CSD, the device shall warn the user and require an acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to compliance with class RS1.</p> <p>The warning shall at least clearly indicate that listening above 100 % CSD leads to the risk of hearing damage or loss.</p>		N/A
10.6.5.3	<p>Exposure-based requirements</p> <p>With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at.</p> <p>The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3.</p>		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>The EL settling time (time from starting level reduction to reaching target output) shall be 10 s or faster.</p> <p>Test of EL functionality is conducted according to EN 50332-3, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided with a standardized connector, the unweighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than -10 dBFS for a digital interface.</p> <p>NOTE In case the source is known not to be music (or test signal), the EL may be disabled.</p>		
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	<p>Corded listening devices with analogue input</p> <p>With 94 dB LAeq acoustic pressure output of the listening device, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the input voltage of the listening device when playing the fixed “programme simulation noise” as described in EN 50332-1 shall be ≥ 75 mV.</p> <p>NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV or 100 dB and 150 mV.</p>		N/A
10.6.6.2	<p>Corded listening devices with digital input</p> <p>With any playing device playing the fixed “programme simulation noise” described in EN 50332-1, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the LAeq,T acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.</p>		N/A
10.6.6.3	<p>Cordless listening devices</p> <p>In cordless mode,</p> <ul style="list-style-type: none"> – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the cordless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the receiving device (for example, built-in volume level control, additional sound features like equalization, etc.) set 		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict																																																												
	to the combination of positions that maximize the measured acoustic output for the above mentioned programme simulation noise, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.																																																														
10.6.6.4	Measurement method <i>Measurements shall be made in accordance with EN 50332-2 as applicable.</i>		N/A																																																												
3	Modification to the whole document		P																																																												
	Delete all the "country" notes in the reference document according to the following list: <table border="1" style="margin-left: 20px;"> <tbody> <tr> <td>0.2.1</td> <td>Note 1 and 2</td> <td>1</td> <td>Note 4 and 5</td> <td>3.3.8.1</td> <td>Note 2</td> </tr> <tr> <td>3.3.8.3</td> <td>Note 1</td> <td>4.1.15</td> <td>Note</td> <td>4.7.3</td> <td>Note 1 and 2</td> </tr> <tr> <td>5.2.2.2</td> <td>Note</td> <td>5.4.2.3.2.2 Table 12</td> <td>Note c</td> <td>5.4.2.3.2.4</td> <td>Note 1 and 3</td> </tr> <tr> <td>5.4.2.3.2.4 Table 13</td> <td>Note 2</td> <td>5.4.2.5</td> <td>Note 2</td> <td>5.4.5.1</td> <td>Note</td> </tr> <tr> <td>5.4.10.2.1</td> <td>Note</td> <td>5.4.10.2.2</td> <td>Note</td> <td>5.4.10.2.3</td> <td>Note</td> </tr> <tr> <td>5.5.2.1</td> <td>Note</td> <td>5.5.8</td> <td>Note</td> <td>5.6.4.2.1</td> <td>Note 2 and 3 and 4</td> </tr> <tr> <td>5.6.8</td> <td>Note 2</td> <td>5.7.8</td> <td>Note</td> <td>5.7.7.1</td> <td>Note 1 and Note 2</td> </tr> <tr> <td>8.5.4.2.3</td> <td>Note</td> <td>10.2.1 Table 39</td> <td>Note 3 and 4 and 5</td> <td>10.5.3</td> <td>Note 2</td> </tr> <tr> <td>10.6.4</td> <td>Note 3</td> <td>F.3.3.6</td> <td>Note 3</td> <td>Y.4.1</td> <td>Note</td> </tr> <tr> <td>Y.4.5</td> <td>Note</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2	3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3	5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note	5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note	5.5.2.1	Note	5.5.8	Note	5.6.4.2.1	Note 2 and 3 and 4	5.6.8	Note 2	5.7.8	Note	5.7.7.1	Note 1 and Note 2	8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2	10.6.4	Note 3	F.3.3.6	Note 3	Y.4.1	Note	Y.4.5	Note						P
0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2																																																										
3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2																																																										
5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3																																																										
5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note																																																										
5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note																																																										
5.5.2.1	Note	5.5.8	Note	5.6.4.2.1	Note 2 and 3 and 4																																																										
5.6.8	Note 2	5.7.8	Note	5.7.7.1	Note 1 and Note 2																																																										
8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2																																																										
10.6.4	Note 3	F.3.3.6	Note 3	Y.4.1	Note																																																										
Y.4.5	Note																																																														
4	Modification to Clause 1		P																																																												
1	Add the following note: <i>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.</i>		P																																																												
5	Modification to 4.Z1		P																																																												



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4.Z1	<p>Add the following new subclause after 4.9:</p> <p>To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>	See below.	P
6	Modification to 5.4.2.3.2.4		N/A
5.4.2.3.2.4	Add the following to the end of this subclause: The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.	No connection to external circuit.	N/A
7	Modification to 10.2.1		N/A
10.2.1	Add the following to c) and d) in table 39: For additional requirements, see 10.5.1.	No such radiation from the equipment.	N/A
8	Modification to 10.5.1		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
10.5.1	<p>Add the following after the first paragraph: For RS 1 compliance is checked by measurement under the following conditions:</p> <p>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</p> <p>Moreover, the measurement shall be made under fault conditions causing an increase of the high voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</p> <p>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>	No such radiation from the equipment.	N/A
9	Modification to G.7.1		N/A
G.7.1	<p>Add the following note: NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A
10	Modification to Bibliography		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>Add the following notes for the standards indicated:</p> <p>IEC 60130-9 NOTE Harmonized as EN 60130-9. IEC 60269-2 NOTE Harmonized as HD 60269-2. IEC 60309-1 NOTE Harmonized as EN 60309-1. IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 60664-5 NOTE Harmonized as EN 60664-5. IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 61508-1 NOTE Harmonized as EN 61508-1. IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1. IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4. IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6. IEC 61643-1 NOTE Harmonized as EN 61643-1. IEC 61643-21 NOTE Harmonized as EN 61643-21. IEC 61643-311 NOTE Harmonized as EN 61643-311. IEC 61643-321 NOTE Harmonized as EN 61643-321. IEC 61643-331 NOTE Harmonized as EN 61643-331.</p>		N/A
11	ADDITION OF ANNEXES		--
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		P
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added: Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord." In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4.7.3	United Kingdom To the end of the subclause the following is added: The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex		N/A
5.2.2.2	Denmark After the 2nd paragraph add the following: A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.	No high touch current measured.	N/A
5.4.11.1 and Annex G	Finland and Sweden To the end of the subclause the following is added: For separation of the telecommunication network from earth the following is applicable: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either <ul style="list-style-type: none">• two layers of thin sheet material, each of which shall pass the electric strength test below, or• one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition <ul style="list-style-type: none">• passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and <ul style="list-style-type: none">• is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.	No such external circuits.	N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p>		
<p>5.5.2.1</p>	<p>Norway After the 3rd paragraph the following is added: Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>		<p>N/A</p>
<p>5.5.6</p>	<p>Finland, Norway and Sweden To the end of the subclause the following is added: Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p>		<p>N/A</p>
<p>5.6.1</p>	<p>Denmark Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. <i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>		<p>N/A</p>
<p>5.6.4.2.1</p>	<p>Ireland and United Kingdom After the indent for pluggable equipment type A, the following is added: – the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.</p>		<p>N/A</p>
<p>5.6.4.2.1</p>	<p>France After the indent for pluggable equipment type A, the following is added: – in certain cases, the protective current rating of the circuit supplied from the mains is taken as 20 A instead of 16 A.</p>		<p>N/A</p>



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.6.5.1	To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm ² to 1,5 mm ² in cross-sectional area.		N/A
5.6.8	Norway To the end of the subclause the following is added: Equipment connected with an earthed mains plug is classified as class I equipment . See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted.		N/A
5.7.6	Denmark To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A
5.7.6.2	Denmark To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .		N/A
5.7.7.1	Norway and Sweden To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: “Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-	Not such system.	N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplett utstyr – og er tilkoplett et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish: ”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”</p>		
8.5.4.2.3	<p>United Kingdom</p> <p>Add the following after the 2nd dash bullet in 3rd paragraph:</p> <p>An emergency stop system complying with the requirements of IEC 60204-1 and ISO 13850 is required where there is a risk of personal injury.</p>	No external circuits.	N/A
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>		N/A
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p>	Direct plug in type	N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a polyphase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p>		
G.4.2	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	United Kingdom To the first paragraph the following is added: Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
G.7.1	Ireland To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		N/A
G.7.2	Ireland and United Kingdom To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm ² is allowed for equipment which is rated over 10 A and up to and including 13 A.		N/A
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i></p> <p>German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>	No CRT within the equipment.	N/A
ZD	IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS (EN)		N/A

WALTEK



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Type of flexible cord	Code designations		N/A
	IEC	CENELEC	
PVC insulated cords			
Flat twin tinsel cord	60227 IEC 41	H03VH-Y	
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F	
Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F	
Rubber insulated cords			
Braided cord	60245 IEC 51	H03RT-F	
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F	
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F	
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F	
Cords having high flexibility			
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H	
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H	
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H	
Cords insulated and sheathed with halogen-free thermoplastic compounds			
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F	
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F	



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

5.2 **TABLE: Classification of electrical energy sources** P

Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters				ES Class
			U (V)	I (mA)	Type ¹⁾	Additional Info ²⁾	
Output load with 20VDC 3.25A							
264Va.c. 60Hz	T1 pin 5 to 6	Normal	56.8Vpk	--	SS	60.61KHz	ES1
264Va.c. 60Hz	T1 after U4	Normal	20.68V	--	SS	DC VC: U4	ES1
264Va.c. 60Hz	T1 after U4	Single fault (U4 Pin 1-5 SC)	0	--	SS	DC VC: U4	ES1
264Va.c. 60Hz	Output + to -	Normal	20.18V	--	SS	DC	ES1
264Va.c. 60Hz	Output + to -	Abnormal (Overload)	19.2V	--	SS	DC	ES1
264Va.c. 60Hz	Output + to -	Single fault (Output SC)	0	--	SS	DC	ES1
264Va.c. 60Hz	Output + to -	Single fault (RS1 SC)	0	--	SS	DC	ES1
264Va.c. 60Hz	Output + to -	Single fault (EC8 SC)	0	--	SS	DC	ES1
264Va.c. 60Hz	Output + to -	Single fault (U4 Pin 4-5 SC)	0	--	SS	DC	ES1
264Va.c. 60Hz	Output + to -	Single fault (U3 pin 1-2 SC)	0	--	SS	DC	ES1
264Va.c. 60Hz	Output + to -	Single fault (U3 pin 3-4 SC)	0	--	SS	DC	ES1
264Va.c. 60Hz	L to N	Normal	374Vpk	--	CP	60Hz	ES3

Supplementary information:

1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc.

2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.

5.4.1.8 **TABLE: Working voltage measurement** P

Location	RMS voltage (V)	Peak voltage (V)	Frequency (Hz)	Comments
Output load with 20VDC 3.25A				
T1 Pin 1-5	241	488	60.61kHz	--



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

T1 Pin 1-6	251	560	60.61kHz	The Max. Vrms, The Max. Vpk
T1 Pin 2-5	233	368		
T1 Pin 2-6	235	440		--
T1 Pin 3-5	209	336		--
T1 Pin 3-6	212	392		--
T1 Pin 4-5	258	512		--
T1 Pin 4-6	277	576		--
CY1 Pin Pri. - Pin Sec.	216	344	60Hz	--
U3 Pin 1-3	231	368	60Hz	--
U3 Pin 1-4	231	368	60Hz	--
U3 Pin 2-3	231	368	60Hz	--
U3 Pin 2-4	231	368	60Hz	--

Supplementary information:

Test voltage: 240V, Frequency: 60Hz.

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics			N/A
Method.....	ISO 306 / B50			—
Object/ Part No./Material	Manufacturer/trademark	Thickness (mm)	T softening (°C)	
--	--	--	--	
Supplementary information:				

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics				P
Allowed impression diameter (mm).....	≤ 2 mm				—
Object/Part No./Material	Manufacturer/trademark	Thickness (mm)	Test temperature (°C)	Impression diameter (mm)	
Plug holder/ Enclosure	SABIC INNOVATIVE PLASTICS US L L C / 945(GG)	1.5mm*2	125	1.7	
Supplementary information:					



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

5.4.2, 5.4.3 TABLE: Minimum Clearances/Creepage distance								P
Clearance (cl) and creepage distance (cr) at/of/between:	U _p (V)	U _{rms} (V)	Freq ¹⁾ (kHz)	Required cl (mm)	cl (mm)	E.S. ²⁾ (V)	Required cr (mm)	cr (mm)
Basic/supplementary:								
L, N trace before fuse F1 (BI)	420	250	0.06	1.5	3.8	--	2.5	3.8
PCB trace between two pins of F1 (BI)	420	250	0.06	1.5	3.2	--	2.5	3.2
Reinforce:								
Primary circuit to enclosure (RI)	420	250	0.06	3.0	5.5	--	5.0	5.5
Primary circuit to secondary terminals (RI)	420	250	0.06	3.0	7.0	--	5.0	7.0
Primary circuit to secondary circuit (PCB under CY1) (RI)	420	250	0.06	3.0	7.0	--	5.0	7.0
Primary circuit to secondary circuit (PCB under U3) (RI)	420	250	0.06	3.0	7.0	--	5.0	7.0
Primary circuit to secondary circuit (PCB under T1)	560	251	60.61	3.0	7.0	--	5.2	7.0
Primary winding to secondary winding (T1) (RI)	560	251	60.61	3.0	10.0	--	5.2	10.0
Core to secondary winding (T1) (RI)	560	251	60.61	3.0	10.0	--	5.2	10.0
Supplementary information:								
1. The transformer core considered as primary circuit. 2. Material Group: IIIb. 3. Unless otherwise specified, the worst conditions of Cl. & Cr. in above mentioned locations have been considered and listed. 1) Only for frequency above 30 kHz 2) Complete Electric Strength voltage (E.S. (V) when 5.4.2.4 applied) 4. BI: basic insulation; SI: supplementary insulation; DI: double insulation; RI: reinforced insulation.								

5.4.4.2 TABLE: Minimum distance through insulation				P
Distance through insulation (DTI) at/of	Peak voltage (V)	Insulation*	Required DTI (mm)	Measured DTI (mm)
Enclosure	420	Reinforced	0.4	1)
Insulation sheet	420	Reinforced	0.4	1)
Optocoupler U3	420	Reinforced	0.4	1)



EN IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Bobbin of transformer	560	Reinforced	0.4	1)
Insulation tape of transformer	560	Reinforced	2 layers	Min. 2 layers
TIW of transformer	560	Reinforced	3 layers	3 layers
Supplementary information:				
1): See appended table 4.1.2.				

5.4.4.9 TABLE: Solid insulation at frequencies >30 kHz						P
Insulation material	E_P	Frequency (kHz)	K_R	Thickness d (mm)	Insulation	V_{PW} (Vpk)
Enclosure	--	0.06	0.35	Min.1.5	Reinforced	420
Insulation sheet	--	0.06	0.35	Min.0.4	Reinforced	420
Bobbin	--	60.61	0.46	Min.0.4	Reinforced	560
Insulation tape of transformer	--	60.61	0.46	Min. 2 layers	Reinforced	560
TIW for transformer	--	60.61	0.46	3 layers	Reinforced	560

Supplementary information:

According to clause 5.4.4.9:

For plastic enclosure alternate method is used, required electric strength test voltage:
 $1.2 \times 420 / 0.35 = 2880V_{peak}$ (KR=0.35 for other material).

For Insulation sheet alternate method is used, required electric strength test voltage:
 $1.2 \times 420 / 0.35 = 2880V_{peak}$ (KR=0.35 for other material).

For transformer bobbin alternate method is used, required electric strength test voltage:
 $1.2 \times 560 / 0.46 = 2922V_{peak}$ (KR=0.46 for other thin foil materials).

For Insulation tape alternate method is used, required electric strength test voltage:
 $1.2 \times 560 / 0.46 = 2922V_{peak}$ (KR=0.46 for other thin foil materials).

For TIW for transformer alternate method is used, required electric strength test voltage:
 $1.2 \times 560 / 0.46 = 2922V_{peak}$ (KR=0.46 for other thin foil materials).

5.4.9 TABLE: Electric strength tests				P
Test voltage applied between:	Voltage shape (Surge, Impulse, AC, DC, etc.)	Test voltage (V)	Breakdown Yes / No	
Basic/supplementary:				
L to N (disconnect fuse)	DC	2500	No	
Reinforced:				



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Transformer Primary Winding to Secondary Winding	DC	4000	No
Transformer Core to Secondary Winding	DC	4000	No
One layer of insulation tape with Transformer	DC	4000	No
Transformer bobbin	DC	4000	No
TIW of transformer	DC	4000	No
Input to enclosure (Wrapped with Foil)	DC	4000	No
Input to output	DC	4000	No
Insulation sheet	DC	4000	No

Supplementary information:

Core of transformer T1 was considered as primary.

Tests were performed on product with each source listed in table 4.1.2.

5.5.2.2	TABLE: Stored discharge on capacitors					P
Location	Supply voltage (V)	Operating and fault condition ¹⁾	Switch position	Measured voltage (Vpk)	ES Class	
L-N	264V	N	--	48	ES1	
L-N	264V	S (R1 OC)	--	96	ES2	

Supplementary information:

X-capacitors installed for testing: see table 4.1.2.

[x] bleeding resistor rating: see table 4.1.2.

[] ICX:

1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit

5.6.6	TABLE: Resistance of protective conductors and terminations				N/A
Location	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)	
--	--	--	--	--	

Supplementary information:

5.7.4	TABLE: Unearthed accessible parts					P
Location	Operating and fault conditions	Supply Voltage (V)	Parameters			ES class
			Voltage	Current	Freq.	



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

			(V _{rms} or V _{pk})	(A _{rms} or A _{pk})	(Hz)	
Output +/- to earth	Normal	264Va.c, 60Hz	--	0.272mApk	60	ES1
	Abnormal (Overload)		--	0.272mApk	60	ES1
	Single fault (RS1 SC)		--	0.272mApk	60	ES1
	Single fault (EC8 SC)		--	0.272mApk	60	ES1
	Single fault (U4 Pin 4-5 SC)		--	0.272mApk	60	ES1
	Single fault (U3 pin 1-2 SC)		--	0.272mApk	60	ES1
	Single fault (U3 pin 3-4 SC)		--	0.272mApk	60	ES1
	Single fault (Output SC)		--	0.272mApk	60	ES1
Plastic enclosure with metal foil to earth	Normal	264Va.c, 60Hz	--	0.032mApk	60	ES1
	Abnormal (Overload)		--	0.032mApk	60	ES1
	Single fault (RS1 SC)		--	0.032mApk	60	ES1
	Single fault (EC8 SC)		--	0.032mApk	60	ES1
	Single fault (U4 Pin 4-5 SC)		--	0.032mApk	60	ES1
	Single fault (U3 pin 1-2 SC)		--	0.032mApk	60	ES1
	Single fault (U3 pin 3-4 SC)		--	0.032mApk	60	ES1
	Single fault (Output SC)		--	0.032mApk	60	ES1

Supplementary information:

SC= short circuit; OC= open circuit



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

5.7.5	TABLE: Earthed accessible conductive part			N/A
Supply voltage (V).....:				—
Phase(s)	[] Single Phase; [] Three Phase: [] Delta [] Wye			
Power Distribution System	[] TN [] TT [] IT			
Location	Fault Condition No in IEC 60990 clause 6.2.2	Touch current (mA)	Comment	
--	--	--	--	
Supplementary Information:				

5.8	TABLE: Backfeed safeguard in battery backed up supplies					N/A
Location	Supply voltage (V)	Operating and fault condition	Time (s)	Open-circuit voltage (V)	Touch current (A)	ES Class
--	--	--	--	--	--	--
Supplementary information:						

6.2.2	TABLE: Power source circuit classifications					P
Location	Operating and fault condition	Voltage (V)	Current (A)	Max. Power ¹⁾ (W)	Time (S)	PS class
Output + to -	WORST CASE LOAD FAULT	19.20	4.71	90.43	5	PS2
Output + to -	Worst-case power source fault (RS1 SC)	0	0	0	3	PS1
Output + to -	Worst-case power source fault EC8 SC)	0	0	0	3	PS1
Output + to -	Worst-case power source fault (U4 Pin 4-5 SC)	0	0	0	3	PS1
Output + to -	Worst-case power source fault	0	0	0	3	PS1



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark				Verdict
--------	--------------------	-----------------	--	--	--	---------

	(U3 pin 1-2 SC)					
Output + to -	Worst-case power source fault (U3 pin 3-4 SC)	0	0	0	3	PS1
Output + to -	Worst-case power source fault (Output SC)	0	0	0	3	PS1

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit

1) Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3.

6.2.3.1 TABLE: Determination of Arcing PIS P

Location	Open circuit voltage after 3 s (Vpk)	Measured r.m.s current (A)	Calculated value	Arcing PIS? Yes / No
All internal circuits/components (exclude the output terminal)	--	--	--	Yes

Supplementary information:

An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V_p) and normal operating condition rms current (I_{rms}) is greater than 15.

6.2.3.2 TABLE: Determination of resistive PIS P

Location	Operating and fault condition	Dissipate power (W)	Resistive PIS? Yes / No
All internal circuits/components	--	--	Yes

Supplementary information:

A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.

If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.

A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.

8.5.5 TABLE: High pressure lamp N/A

Lamp manufacturer	Lamp type	Explosion method	Longest axis of glass particle	Particle found beyond 1 m
-------------------	-----------	------------------	--------------------------------	---------------------------



EN IEC 62368-1				
Clause	Requirement + Test		Result - Remark	Verdict
			(mm)	Yes / No
--	--	--	--	--
Supplementary information:				

9.6	TABLE: Temperature measurements for wireless power transmitters								N/A
Supply voltage (V).....		--						—	
Max. transmit power of transmitter (W).....		--						—	
Foreign objects	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm		
	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	
--	--	--	--	--	--	--	--	--	
Supplementary information:									

5.4.1.4, 9.3, B.1.5, B.2.6	TABLE: Temperature measurements					P
Supply voltage (V).....	99V 60Hz	99V 60Hz	264V 50Hz	264V 50Hz	—	
Ambient temperature during test T_{amb} (°C).....	See below	See below	See below	See below	—	
Maximum measured temperature T of part/at:	T (°C)				Allowed T_{max} (°C)	
Output load with 20VDC 3.25A	Horizontal	Vertical	Horizontal	Vertical	--	
Pin holder	41.0	39.8	37.2	34.6	120	
Input wire	75.1	71.3	63.6	60.6	80	
LF1 winding	94.8	91.0	80.6	77.1	130	
CX1 body	98.2	94.4	83.0	79.7	110	
EC1 body	100.9	96.9	86.6	83.1	105	
PCB near U1	107.1	103.7	94.1	90.8	130	
T1 winding	106.3	103.1	97.5	91.0	110	
T1 core	103.9	100.5	94.2	94.3	110	
CY1 body	98.0	95.7	88.6	85.9	125	



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark				Verdict
--------	--------------------	-----------------	--	--	--	---------

U3 body	98.1	97.8	90.6	88.0	110		
EC8 body	103.7	102.6	96.5	95.4	105		
Insulation sheet	93.3	91.1	84.6	82.4	Ref.		
Output terminal	94.3	92.1	85.4	84.2	Ref.		
Enclosure inside Top near T1	92.6	88.2	83.8	79.0	120		
Enclosure inside Bottom near T1	73.3	68.8	67.5	64.3	120		
Enclosure Outside Top near T1	76.2	69.5	68.4	61.8	77		
Enclosure Outside Bottom near T1	68.1	64.1	57.6	55.8	77		
Ambient	25.0	25.0	25.0	25.0	--		
Temperature T of winding:	T1 (°C)	R ₁ (Ω)	T1 (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class
--	--	--	--	--	--	--	--

Supplementary information:

Temperature limit for TS1 of accessible enclosure according to Table 38.

Note 1: The apparatus was submitted and evaluated for maximum manufacturer's recommended ambient (T_{ma}) of 25°C.

Note 2: The temperatures were measured under the worse case normal mode defined in clause B.2.1.

Note 3: Temperature limits are calculated as follows:

Winding components providing safety isolation:

Class B → T_{max} = 120 - 10 = 110°C.

B.2.5		TABLE: Input test							P
U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status	
Output load with 5VDC 3A									
99	50	0.351	--	17.3	--	F1	0.351	Rated load	
110	50	0.328	1.5	17.3	--	F1	0.328	Rated load	
240	50	0.206	1.5	17.6	--	F1	0.206	Rated load	
264	50	0.183	--	17.7	--	F1	0.183	Rated load	
99	60	0.337	--	17.3	--	F1	0.337	Rated load	
110	60	0.310	1.5	17.3	--	F1	0.310	Rated load	
240	60	0.209	1.5	17.6	--	F1	0.209	Rated load	
264	60	0.188	--	17.8	--	F1	0.188	Rated load	
Output load with 9VDC 3A									



EN IEC 62368-1

Clause	Requirement + Test				Result - Remark			Verdict
--------	--------------------	--	--	--	-----------------	--	--	---------

99	50	0.569	--	29.8	--	F1	0.569	Rated load
110	50	0.516	1.5	29.8	--	F1	0.516	Rated load
240	50	0.310	1.5	29.9	--	F1	0.310	Rated load
264	50	0.294	--	30.1	--	F1	0.294	Rated load
99	60	0.547	--	29.8	--	F1	0.547	Rated load
110	60	0.499	1.5	29.7	--	F1	0.499	Rated load
240	60	0.305	1.5	29.9	--	F1	0.305	Rated load
264	60	0.288	--	30.1	--	F1	0.288	Rated load

Output load with 12VDC 3A

99	50	0.738	--	39.4	--	F1	0.738	Rated load
110	50	0.668	1.5	39.3	--	F1	0.668	Rated load
240	50	0.382	1.5	39.4	--	F1	0.382	Rated load
264	50	0.369	--	39.6	--	F1	0.369	Rated load
99	60	0.706	--	39.5	--	F1	0.706	Rated load
110	60	0.643	1.5	39.4	--	F1	0.643	Rated load
240	60	0.372	1.5	39.4	--	F1	0.372	Rated load
264	60	0.345	--	39.5	--	F1	0.345	Rated load

Output load with 15VDC 3A

99	50	0.914	--	49.2	--	F1	0.914	Rated load
110	50	0.826	1.5	49.0	--	F1	0.826	Rated load
240	50	0.487	1.5	49.0	--	F1	0.487	Rated load
264	50	0.436	--	49.2	--	F1	0.436	Rated load
99	60	0.874	--	49.1	--	F1	0.874	Rated load
110	60	0.795	1.5	49.0	--	F1	0.795	Rated load
240	60	0.483	1.5	49.1	--	F1	0.483	Rated load
264	60	0.424	--	49.3	--	F1	0.424	Rated load

Output load with 20Vdc 3.25A

99	50	1.324	--	70.9	--	F1	1.324	Rated load
110	50	1.172	1.5	70.6	--	F1	1.172	Rated load
240	50	0.674	1.5	70.4	--	F1	0.674	Rated load
264	50	0.600	--	70.5	--	F1	0.600	Rated load
99	60	1.238	--	71.0	--	F1	1.238	Rated load



EN IEC 62368-1

Clause	Requirement + Test					Result - Remark		Verdict
--------	--------------------	--	--	--	--	-----------------	--	---------

110	60	1.114	1.5	70.8	--	F1	1.114	Rated load
240	60	0.661	1.5	70.5	--	F1	0.661	Rated load
264	60	0.591	--	70.7	--	F1	0.591	Rated load

USB-A Loading: 12VDC 1.5A

99	50	0.415	--	20.5	--	F1	0.415	Rated load
110	50	0.377	1.5	20.5	--	F1	0.377	Rated load
240	50	0.223	1.5	20.7	--	F1	0.223	Rated load
264	50	0.203	--	20.8	--	F1	0.203	Rated load
99	60	0.400	--	20.5	--	F1	0.400	Rated load
110	60	0.366	1.5	20.4	--	F1	0.366	Rated load
240	60	0.223	1.5	20.8	--	F1	0.223	Rated load
264	60	0.205	--	20.9	--	F1	0.205	Rated load

USB-A Loading 12VDC1.5A+USB-C loading 15VDC, 3A)

99	50	1.315	--	70.2	--	F1	1.315	Rated load
110	50	1.161	1.5	69.7	--	F1	1.161	Rated load
240	50	0.663	1.5	69.1	--	F1	0.663	Rated load
264	50	0.590	--	69.2	--	F1	0.590	Rated load
99	60	1.217	--	64.9	--	F1	1.217	Rated load
110	60	1.094	1.5	69.6	--	F1	1.094	Rated load
240	60	0.643	1.5	69.0	--	F1	0.643	Rated load
264	60	0.582	--	69.0	--	F1	0.582	Rated load

Supplementary information:

The maximum measured current under rated voltage did not exceed 110% of the rated current.

B.3, B.4 TABLE: Abnormal operating and fault condition tests							P
Ambient temperature T _{amb} (°C)..... :						See below	—
Power source for EUT: Manufacturer, model/type, output rating... :						--	—
Component No.	Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observation	
Output load with 20VDC 3.25A							
Output	O-L	264	6h 48mins	F1	0.591→ 0.658→ 0.743→	Output overload current from 3.25A to 4.4A, and shutdown at 4.4A, no damage, no hazard. T1 winding: 125.6°C	



EN IEC 62368-1

Clause	Requirement + Test			Result - Remark	Verdict
				0.043	T1 Core: 123.0°C Enclosure Outside Top near T1: 78.2°C Enclosure Outside Bottom near T1: 70.2°C Ambient: 25.0°C Output voltage: 19.89 V Touch current (output to earth): 0.272mA _p . Touch current (plastic enclosure with metal foil to earth): 0.032mA _p . Ambient: 25.0 °C.
Transformer output	O-L	264	5h 35mins	F1 0.599→ 0.659→ 0.774→ 0.041	Transformer overload current from 3.25A to 4.4A, and shutdown at 4.4A, no damage, no hazard. T1 winding: 124.9°C T1 Core: 122.5°C Enclosure Outside Top near T1: 81.1°C Enclosure Outside Bottom near T1: 69.5°C Ambient: 25.0°C Output voltage: 19.89V Touch current (output to earth): 0.272mA _p . Touch current (plastic enclosure with metal foil to earth): 0.032mA _p . Ambient: 25.0 °C.
Output	S-C	264	10mins	F1	0.01 Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA _p , Touch current (plastic enclosure with metal foil to earth): 0.032mA _p . Ambient: 25.0 °C.



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
EC1	S-C 264	1s F1 0	F1 open immediately. No damage, No hazard. Output Voltage: 0Vdc. Touch current (output to earth): 0.272mApk, Touch current (plastic enclosure with metal foil to earth): 0.032mApk. Ambient: 25.0 °C.
D4	S-C 264	1s F1 0	F1 open immediately. No damage, No hazard. Output Voltage: 0Vdc. Touch current (output to earth): 0.272mApk, Touch current (plastic enclosure with metal foil to earth): 0.032mApk. Ambient: 25.0 °C.
T1 pin1-2	S-C 264	10mins F1 0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mApk, Touch current (plastic enclosure with metal foil to earth): 0.032mApk. Ambient: 25.0 °C.
T1 pin 3-4	S-C 264	10mins F1 0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mApk, Touch current (plastic enclosure with metal foil to earth): 0.032mApk. Ambient: 25.0 °C.



EN IEC 62368-1

Clause	Requirement + Test		Result - Remark			Verdict
T1 pin 5-6	S-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.
RS1	S-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.
U4 Pin 4-5	S-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.
U3 Pin 1-2	S-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

U3 Pin 3-4	S-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.
U3 Pin 1	O-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.2726mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.
U3 Pin 3	O-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.
EC8	S-C	264	10mins	F1	0.020	Unit shutdown immediately, recoverable. no hazard. Output voltage: 0Vdc. Touch current (output to earth): 0.272mA, Touch current (plastic enclosure with metal foil to earth): 0.032mA. Ambient: 25.0 °C.

Supplementary information:

Test table is provided to record fault conditions for all applicable energy sources including Thermal burn injury.

- 1) S-C: Short-circuited; O-C: Open-circuited; O-L: Overloaded.
- 2) The test result shown all safeguards remained effective, all safeguards complied with applicable



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<p>requirements in this standard after restoration of normal operating conditions.</p> <p>3) The test result shown no Class 1 or 2 energy source become Class 3 level during and after single fault condition.</p> <p>4) For fuse opened condition, carried out for all sources of fuse.</p> <p>5) The overloaded condition is according to annex G.5.3.3.</p> <p>6) Winding Limit for Transformer winding: 175 °C – 10 °C = 165 °C</p> <p>7) Plastic material: 87°C.</p>

M.3	TABLE: Protection circuits for batteries provided within the equipment						N/A
Is it possible to install the battery in a reverse polarity position?.....:						--	—
Equipment Specification	Charging						
	Voltage (V)			Current (A)			
	--			--			
Manufacturer/type	Battery specification						
	Non-rechargeable batteries			Rechargeable batteries			
	Discharging current (A)	Unintentional charging current (A)	Charging		Discharging current (A)	Reverse charging current (A)	
			Voltage (V)	Current (A)			
	--	--	--	--	--	--	
Note: The tests of M.3.2 are applicable only when above appropriate data is not available.							
Specified battery temperature (°C).....:						--	
Component No.	Fault condition	Charge/ discharge mode	Test time	Temp. (°C)	Current (A)	Voltage (V)	Observation
--	--	--	--	--	--	--	--
Supplementary information:							
Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.							

M.4.2	TABLE: Charging safeguards for equipment containing a secondary lithium battery					N/A
Maximum specified charging voltage (V).....:					--	—
Maximum specified charging current (A)					--	—
Highest specified charging temperature (°C)					--	--
Lowest specified charging temperature (°C)					--	--
Battery manufacturer/type	Operating and fault condition	Measurement			Observation	
		Charging	Charging	Temp.		



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

		voltage (V)	current (A)	(°C)	
--	--	--	--	--	--

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature

Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)						P
Output Circuit	Condition	U _{oc} (V)	Time (s)	I _{sc} (A)		S (VA)	
				Meas.	Limit	Meas.	Limit
(Loading: 5VDC 3A)							
Output	Normal conditions	5.20	5	4.3	8	18.36	100
Output	Single fault RS1 SC	0	5	0	8	0	100
Output	Single fault EC4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 1-2 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3-4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3 OC	0	5	0	8	0	100
(Loading: 9VDC 3A)							
Output	Normal conditions	9.10	5	4.35	8	35.63	100
Output	Single fault RS1 SC	0	5	0	8	0	100
Output	Single fault EC4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 1-2 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3-4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3 OC	0	5	0	8	0	100



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark					Verdict
--------	--------------------	-----------------	--	--	--	--	---------

(Loading: 12VDC 3A)							
Output	Normal conditions	12.11	5	4.35	8	48.76	100
Output	Single fault RS1 SC	0	5	0	8	0	100
Output	Single fault EC4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 1-2 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3-4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3 OC	0	5	0	8	0	100
(Loading: 15VDC 3A)							
Output	Normal conditions	15.14	5	4.35	8	61.99	100
Output	Single fault RS1 SC	0	5	0	8	0	100
Output	Single fault EC4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 1-2 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3-4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3 OC	0	5	0	8	0	100
(Loading: 20VDC 3.25A)							
Output	Normal conditions	20.18	5	4.71	8	90.43	100
Output	Single fault RS1 SC	0	5	0	8	0	100
Output	Single fault EC4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 1-2 SC	0	5	0	8	0	100



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark					Verdict
Output	Single fault U3 pin 3-4 SC	0	5	0	8	0	100
Output	Single fault U3 pin 3 OC	0	5	0	8	0	100
Supplementary Information:							
SC = short circuit, OC = open circuit							

T.2, T.3, T.4, T.5 TABLE: Steady force test							P
Location / Part	Material	Thickness (mm)	Probe	Force (N)	Test Duration (s)	Observation	
Top side (T.4)	*	*	--	100	5	Enclosure remained intact, no crack/opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Front sides (T.4)	*	*	--	100	5	Enclosure remained intact, no crack/opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Bottom side (T.4)	*	*	--	100	5	Enclosure remained intact, no crack/opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Internal components (T.2)	--	--	--	10	5	No reduction the clearances and creepage distances	
Supplementary information:							
*See table 4.1.2 enclosure materials							

T.6, T.9 TABLE: Impact test					N/A
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	
--	--	--	--	--	
Supplementary information:					



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

T.7	TABLE: Drop test				P
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	
Three side of enclosure	*	*	1000mm	After the drop test, enclosure remained intact, no cracking/opening developed in the enclosure joint. Internal ES3, TS3 were not accessible after test. No insulation breakdown.	
Supplementary information:					
*See table 4.1.2 enclosure materials					

T.8	TABLE: Stress relief test				P
Location/Part	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation
Enclosure	*	*	103	7	Enclosure remained intact, no cracking/opening developed in the enclosure joint. Internal ES3, TS3 were not accessible after test. No insulation breakdown.
Supplementary information:					
*See table 4.1.2 enclosure materials					

X	TABLE: Alternative method for determining minimum clearances distances			N/A
Clearance distanced between:	Peak of working voltage (V)	Required cl (mm)	Measured cl (mm)	
--	--	--	--	
Supplementary information:				
See Table 5.4.2, 5.4.3				

4.1.2	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
Enclosure	SABIC INNOVATIVE PLASTICS B V	945(GG)	PC, V-0, 120°C, min. thickness: 1.5mm	UL 94	UL E45329	
Pin holder	SABIC INNOVATIVE PLASTICS B V	945(GG)	PC, V-0, 120°C, min. thickness: 1.5mm	UL 94	UL E45329	



EN IEC 62368-1

Clause	Requirement + Test		Result - Remark	Verdict
PCB	Interchangeable	Interchangeable	V-1 or better, 130°C	UL 796 UL
Input wire	Guangdong Zelong Wire and Cable Co., Ltd.	1007	VW-1, min. 80°C, min. 300V, min. 20AWG	UL 758 UL E334062
(Alternative)	Interchangeable	Interchangeable	VW-1, min. 80°C, min. 300V, min. 20AWG	UL 758 UL
Fuse (F1)	Dongguan LUOYI Electronics Technology Co., Ltd.	SAT	T3.15A, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 VDE 40050512
(Alternative)	Dongguan Chevron Electronic Technology Co., Ltd.	SET	T3.15A, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 VDE 40038565
(Alternative)	XC Electronics (Shen Zhen) Corp. Ltd.	5TE	T3.15A, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 VDE 40029550
(Alternative)	Shenzhen Lanson Electronics Co. Ltd.	SMT	T3.15A, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 VDE 40012592
X-Capacitor (CX1)	Guangdong JURCC electronics Co., LTD.	MPX/MKP	0.47uF, min. 250Vac, min.110°C, X2 type	IEC/EN 60384-14 VDE 40034920
(Alternative)	Shantou High-New Technology Dev. Zone Songtian Enterprise Co., Ltd.	MPX	0.47uF, min. 250Vac, min.110°C, X2 type	IEC/EN 60384-14 VDE 40034679
Bleeder resistors (R1, R2, R3, R4)	Interchangeable	Interchangeable	Each rated 5.1MΩ, 1/4W	IEC 62368-1, EN IEC 62368-1 Tested with appliance



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark		Verdict	
Inductance (LF1)	SHENZHEN XINHOANGFEID A ELECTRONIC TECHNOLOGY CO., LTD	T9*5*3-200uH	N1: Φ0,5mm*1P N2: Φ0,5mm*1P	IEC 62368-1, EN IEC 62368-1	Tested with appliance
(Alternative)	SHENZHEN CHANGPING ELECTRONIC TECHNOLOGY CO., LTD	T9*5*3-200uH	N1: Φ0,5mm*1P N2: Φ0,5mm*1P	IEC 62368-1, EN IEC 62368-1	Tested with appliance
Y-capacitor (CY1)	Huizhou Jingqin Electronic Components Co Ltd	SMD series	Max. 2200pF, Min.250V, 125°C, Y1 type	EN IEC 60384-14	ENEC-05407
(Alternative)	Shenzhen Haotian Electronic Co., Ltd.	HT	Max. 2200pF, Min.250V, 125°C, Y1 type	IEC/EN 60384-14	VDE 40029300
Optocoupler (U3)	Shenzhen Orient Components Co. Ltd.	OR817 x, OR10XXXX	Dti≥0.4mm, Ext. cl≥7.6mm, Ext. cr ≥7.6mm, min. 110°C, Vini,a / Vini,b: 6000V	IEC 60747-5-5 EN IEC 60747-5-5	VDE 40029733
Transformer (T1)	Dongguan Runyan Electronic co.,LTD	LSD-095-B10T	Class B	Applicable parts in IEC 62368-1 and according to IEC 60085.	Tested with appliance
- Bobbin	SUMITOMO BAKELITE CO LTD	PM-9630	Phenolic, 150°C, V-0, min. 0.4mm thick.	UL 94	UL E41429
(Alternative)	CHANG CHUN PLASTICS CO LTD	T375J(G5)(G6)	Phenolic, 150°C, V-0, min. 0.4mm thick.	UL 94	UL E59481
- Magnet wire	FENG CHING METAL CORP	xUEW-2	130°C	UL 1446	UL E172395
(Alternative)	SIHUI HENGHUI ELECTRICAL APPLIANCES CO LTD	EIW	180°C	UL 1446	UL E337948



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict		
(Alternative)	Interchangeable	Interchangeable	Min. 130°C	UL 1446	UL
- Triple insulated wire	Furukawa Electric Co., Ltd.	TEX-E	130°C	IEC 62368-1, EN IEC 62368-1	VDE 40032438
(Alternative)	SHANGHAI LUCKY TRADE CO LTD	TIW-B	130°C	IEC 62368-1, EN IEC 62368-1	VDE 40023686
- Insulation tape	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	CT*, CT-280, PZ*	Min. 130°C	UL 510A	UL E165111
(Alternative)	SUZHOU MAILADUONA ELECTRIC MATERIAL CO LTD	JY313#	Min. 130°C	UL 510A	UL E188295
- Tube	GREAT HOLDING INDUSTRIAL CO LTD	TFS,TFT, TFL	200°C, VW-1	UL 224	UL E156256
(Alternative)	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-TT-T, CB-TT-L	200°C, VW-1	UL 224	UL E180908
(Alternative)	Shenzhen Zhongdianchenguang Electronic Co Ltd	CG-L, CG-T, CG-S	200°C, VW-1	UL 224	UL E469628
- Varnish	KYOCERA Corporation	TVB2180T, TVB2180TB	Min. 130°C	UL 1446	UL E83702
(Alternative)	ZHUHAI CHANGXIAN NEW MATERIALS TECHNOLOGY CO LTD	E962	Min. 155°C	UL 1446	UL E335405
Insulation sheet	JINGMEN GORUN TECHNOLOGY CO LTD	HE70(x)(#)	PC, V-0, min. thickness: 0.4mm	UL94	UL E305163



EN IEC 62368-1

Clause	Requirement + Test	Result - Remark			Verdict
- Insulation tape wrapped outside of insulation sheet	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	CT*, CT-280, PZ*	Min. 130°C	UL 510A	UL E165111
(Alternative)	SUZHOU MAILADUONA ELECTRIC MATERIAL CO LTD	JY313#	Min. 130°C	UL 510A	UL E188295
USB plastic	Interchangeable	Interchangeable	Min. V-1	UL 94	UL
Glue for fixing components in place	Interchangeable	Interchangeable	Minimum V-2.	UL 94	UL
Supplementary information:					
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					
2) License available upon request.					

WALTEK



EN 50075: 1990 (Partial)			
Clause	Requirement + Test	Result - Remark	Verdict

European plug portion test for EU plug portion:

6	Marking		P
	Appliances shall be marked as follows:	Incorporated with adaptor.	P
	Rated current in amperes (A)		P
	Rated Voltage in volts (V)		P
	Symbol for nature of supply (~)		P
	Name, trade mark or identification mark of manufacturer or responsible vendor		P
	Type reference		P

7	Dimensions		P	
	Plug shall comply with Standard Sheet 1		P	
	Between two pins (pin base)	18.0 – 19.2 mm	18.54 mm	P
	Between two pins (pin top)	17.0 – 18.0 mm	17.66 mm	P
	Diameter of pin (metallic part)	4 ^{±0.06} mm	3.98 mm	P
	Diameter of pin (pin base)	max. 4.0 mm	3.90 mm	P
	Distance from the engagement face of the plug3)	max. 4.0 mm	3.68 mm	P
	Diameter of pin (middle part)	max. 3.8 mm	3.64 Mm	P
	Pin length	19 ^{±0.5} mm	19.11 mm	P
	Length of pin except metal part	10 ^{+1.0} mm	10.45 mm	P
	Shape of pin top		Round shape mm	P
	Length of plug base	35.3 ^{±0.7} mm	35.80 mm	P
	Width of plug base	13.7 ^{±0.7} mm	14.24 mm	P
	Diagonal dimension of plug base within a distance of 18mm	<26.1 ^{±0.5} mm	26.11 mm	P
		<26.1 ^{±0.5} mm	26.17 mm	P
	Angle	45°	45 °	P
	Radius	R 5 -0, +1 mm	R5.67 mm	P

8	Protection against electric shock		P
8.1	Live parts of the plug not accessible (standard test finger)	Incorporated with adaptor.	P



EN 50075: 1990 (Partial)

Clause	Requirement + Test	Result - Remark	Verdict
8.2	No connection between one plug-pin and socket outlet		P
8.3	External parts of insulating material		P
9	Construction		P
9.1	Plugs are not replaceable	Incorporated with adaptor.	P
9.2	Switches, fuse, lampholder not incorporated		P
9.3	Solid pins	See clause 13	P
	Adequate mechanical strength		P
9.4	Pins locked against rotation	See clause 13.1 & 13.4	P
	Adequate fixed into the body		P
9.5	Kind of connection		P
9.6	Easily to be withdrawn from socket-outlet	Incorporated with adaptor	P
10	Resistance to humidity		P
	-Humidity treatment for 48 hours	Tested with adaptor.	P
11	Insulation resistance and electric strength		P
11.1	Insulation resistance (500V, min 5M Ω)	200M Ω	P
11.2	Electric strength (2000V)	(see appended table)	P
13	Mechanical strength		P
13.1	Pressed with 150N for 5 min		P
13.2	Tumbling barrel according to EN 61558-1 Number of cycles:	Adaptor mass: 112g Number of cycles: 500 falls	P
	No damages after the test		P
	Requirements of clause 7 and 8.2 still fulfilled		N/A
13.3	Rubbing test of plug-pins: 10000 cycles, 4N		P
	No damage of the pins		P
13.4	Pull test at 70°C with 40N		P
	Pins not more than 1 mm displaced	Displacement: 0.2 mm	P



EN 50075: 1990 (Partial)

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

14	Resistance to heat and to aging		P
14.1	Sufficient resistant to heat	Incorporated with adaptor.	P
14.1.1	After 1 h in heating cabinet at 100°C no damage shown	Tested with adaptor.	P
14.1.2	After 1 h in heating cabinet at 80°C and a force of 20N through the jaws no damage shown		P
14.2	Aging test		P
	-at 70°C for 168h		P
	-at room temperature for 96h		P
	No traces of cloth at a force of 5N		P
	No damage leads to non-compliance		P

15	Current-carrying parts and connections resistance to heat and to aging		P
15.1	Connections withstand the mechanical stresses occurring in normal use		P
15.2	Contact pressure not through isolating material		P
15.3	Current carrying parts of copper		P
	No electroplated coating when part is subjected to mechanical wear		P
	Other metals having a mechanical strength, an electrical conductivity and a resistance to corrosion		N/A

16	Creepage distances, clearances and distances through insulation		P
	Live parts of different polarity: 3mm	5mm	P
	Through insulation between live parts and accessible surfaces: 1.5mm	2.0mm	P

17	Resistance of insulation material to abnormal heat and fire		P
	Insulating material not unduly affected by abnormal heat and by fire	(see appended table)	P

11.1	TABLE: Insulation resistance measurements		P
	Measured between:	Result	
	Pins connected together and the body ($\geq 5M\Omega$)	200M Ω	P



EN 50075: 1990 (Partial)

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Each pins in turn and the other, the latter being connected to the body ($\geq 5M \Omega$)		200M Ω	P
--	--	---------------	---

Note: --

11.2	TABLE: electric strength measurements	P
------	---------------------------------------	---

Test voltage applied between:	Test voltage (V)	Break down
-------------------------------	------------------	------------

Pins connected together and the body	2000VAC	No
--------------------------------------	---------	----

Each pins in turn and the other, the latter being connected to the body	2000VAC	No
---	---------	----

Note: --

17.3	TABLE: Resistance of insulating material to abnormal heat and to fire	P
------	---	---

Parts that retain current-carrying parts in position: 750°C		P
---	--	---

Other parts: 650°C		P
--------------------	--	---




Note: --

WALTEK



EN 50075: 1990 (Partial)

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

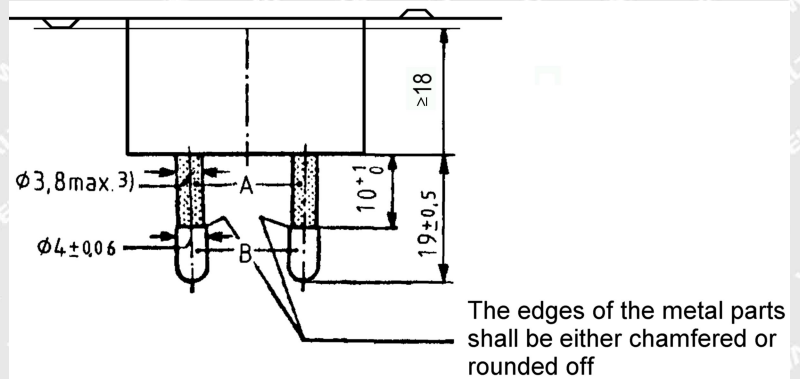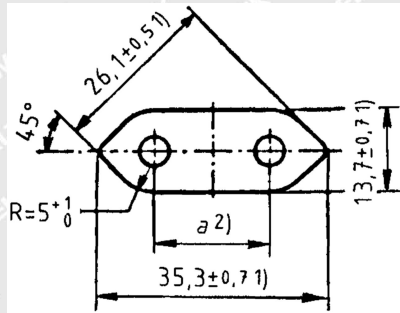

A = Insulating collar

B = metal pin

- 1) These dimensions shall not be exceeded within a distance of 18mm from the engagement face of the plug.
- 2) Dimension a is:
18mm to 19.2mm in the plane of the engagement face
17mm to 18mm at the ends of the pins
- 3) This dimension may be increased to 4mm within a distance of 4mm from the engagement face of the plug.



Photo Documentation

Reference No.: WTF26D01025446D



Picture 1 Overall view



Picture 2 Overall view

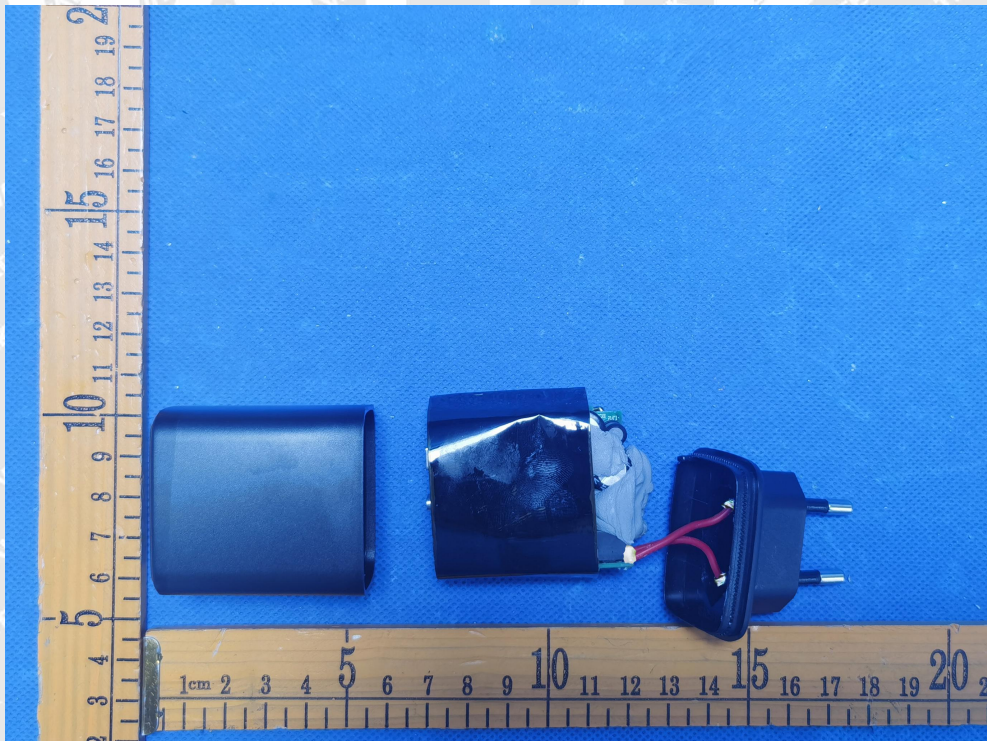


Photo Documentation

Reference No.: WTF26D01025446D



Picture 3 Overall view




Picture 4 Internal view




Photo Documentation

Reference No.: WTF26D01025446D

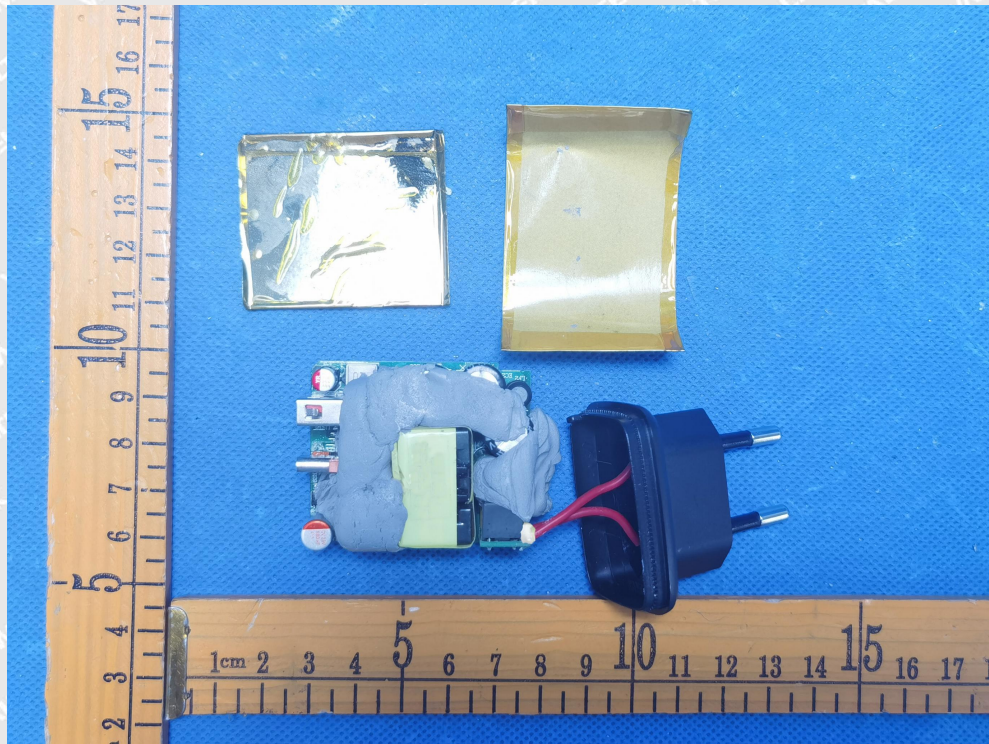

Picture 5 Internal view

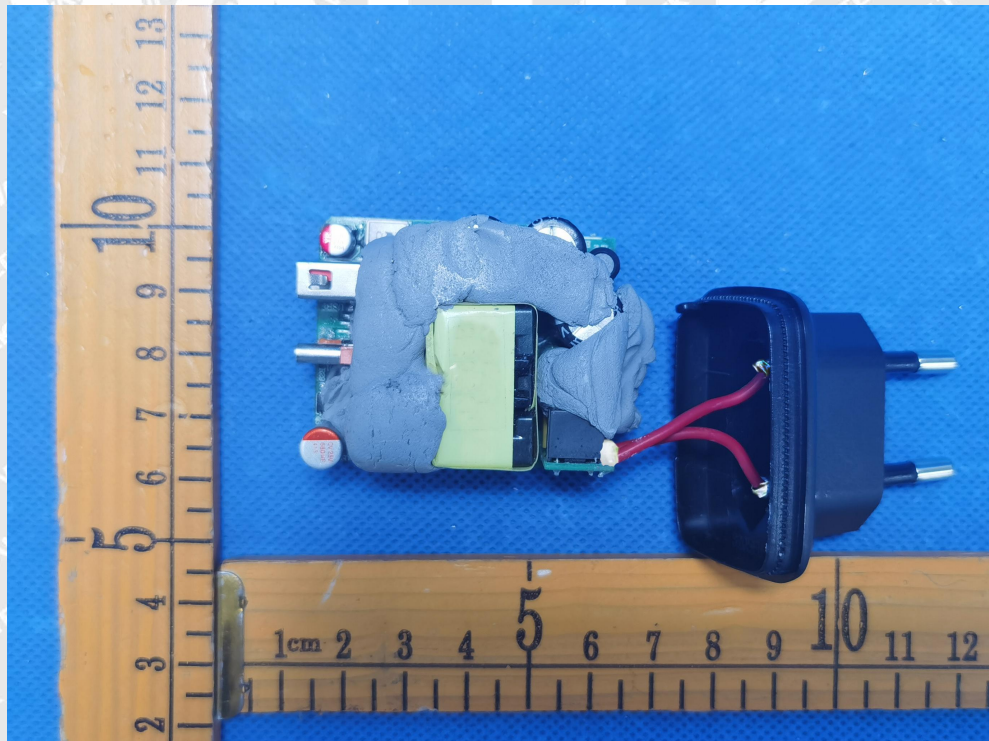


Picture 6 Internal view




Photo Documentation

Reference No.: WTF26D01025446D

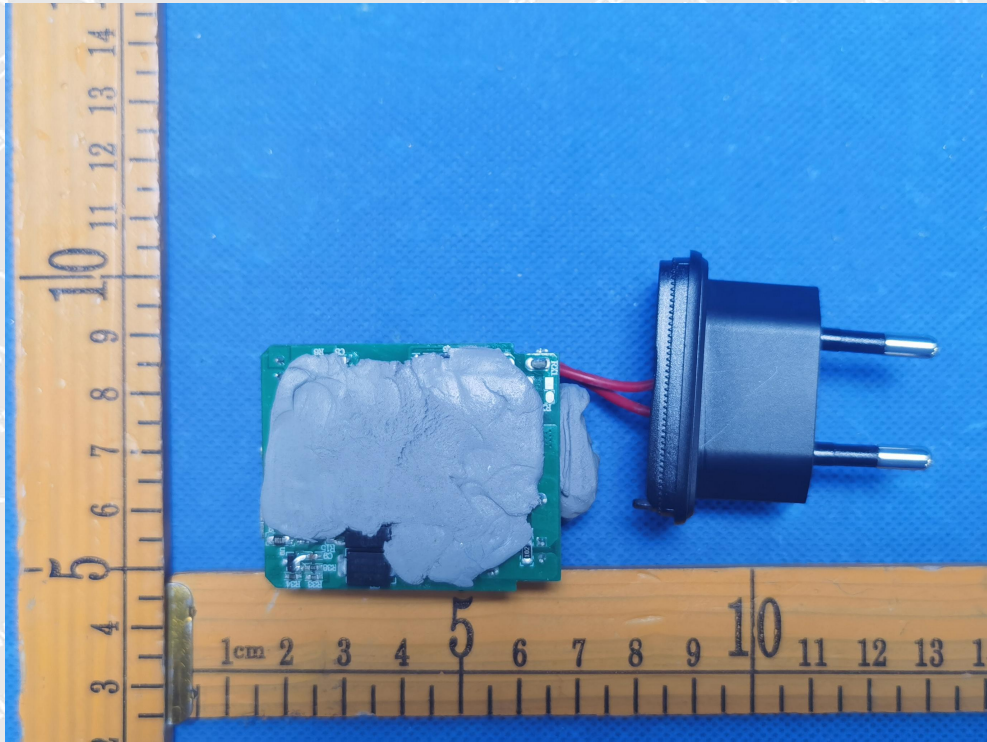

Picture 7 Internal view

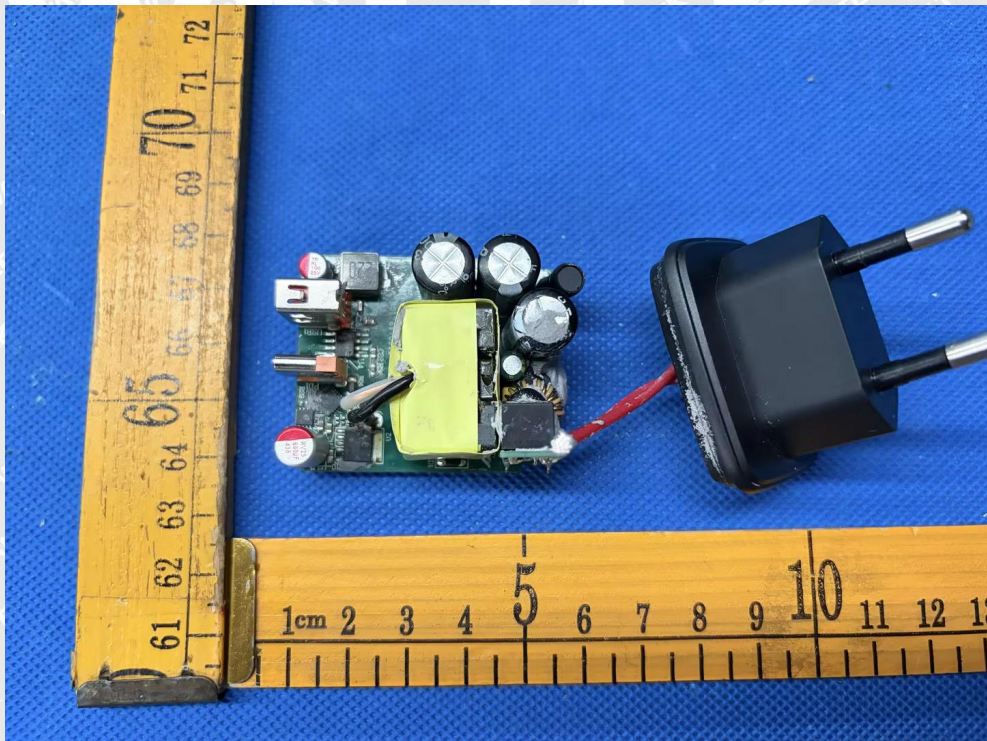


Picture 8 Internal view




Photo Documentation

Reference No.: WTF26D01025446D

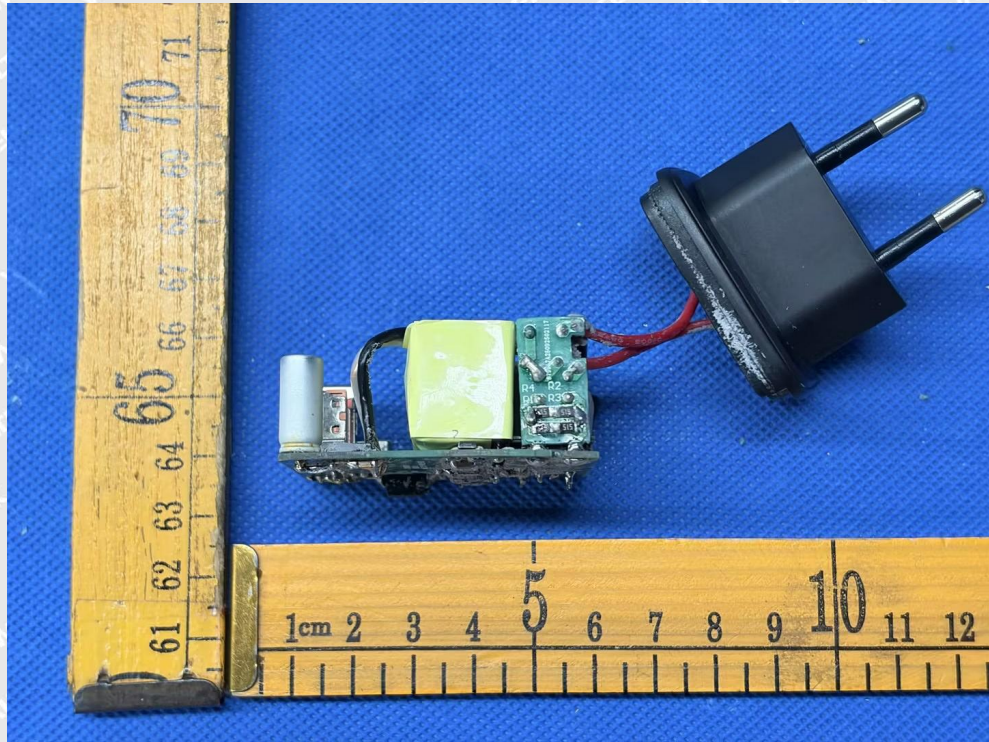

Picture 9 Internal view

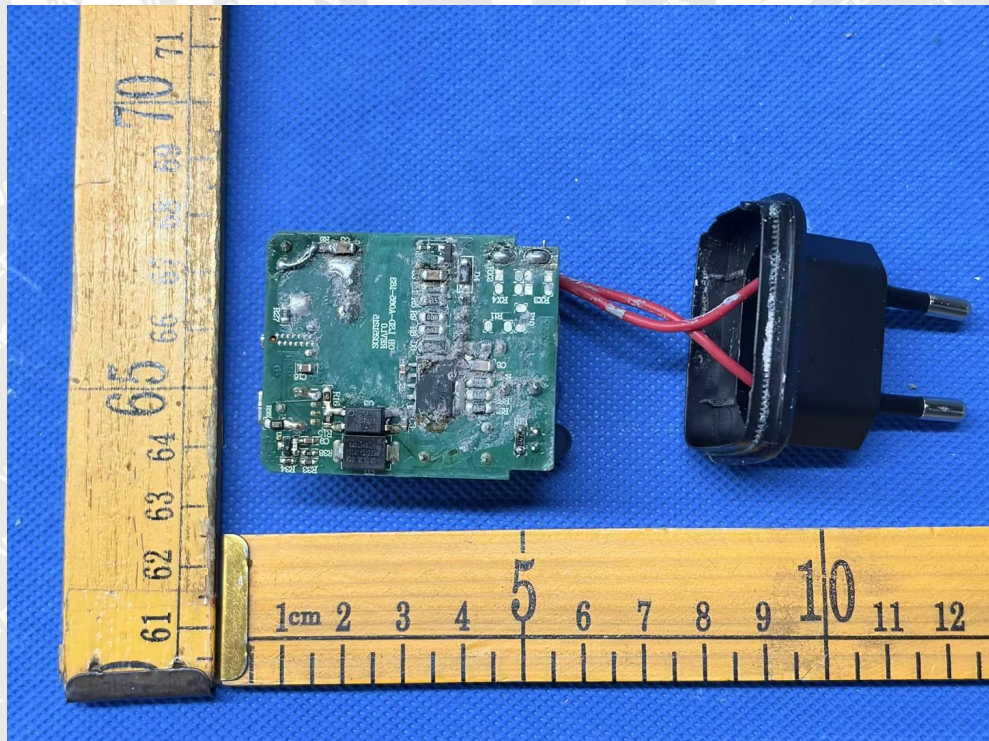


Picture 10 Internal view




Photo Documentation

Reference No.: WTF26D01025446D

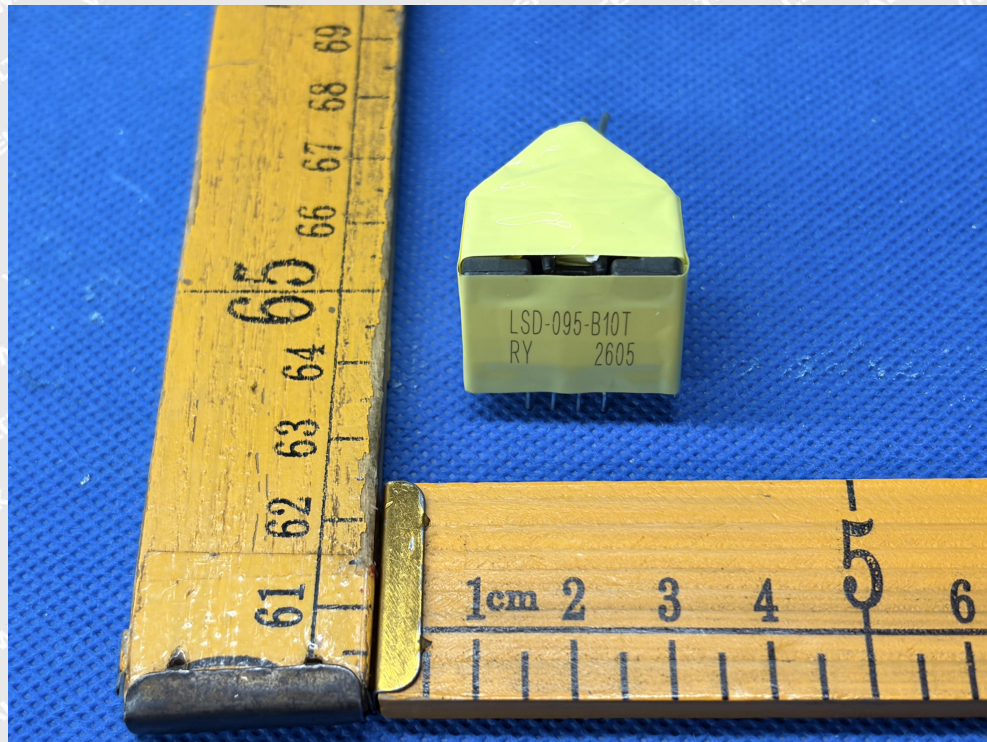

Picture 11 Transformer view

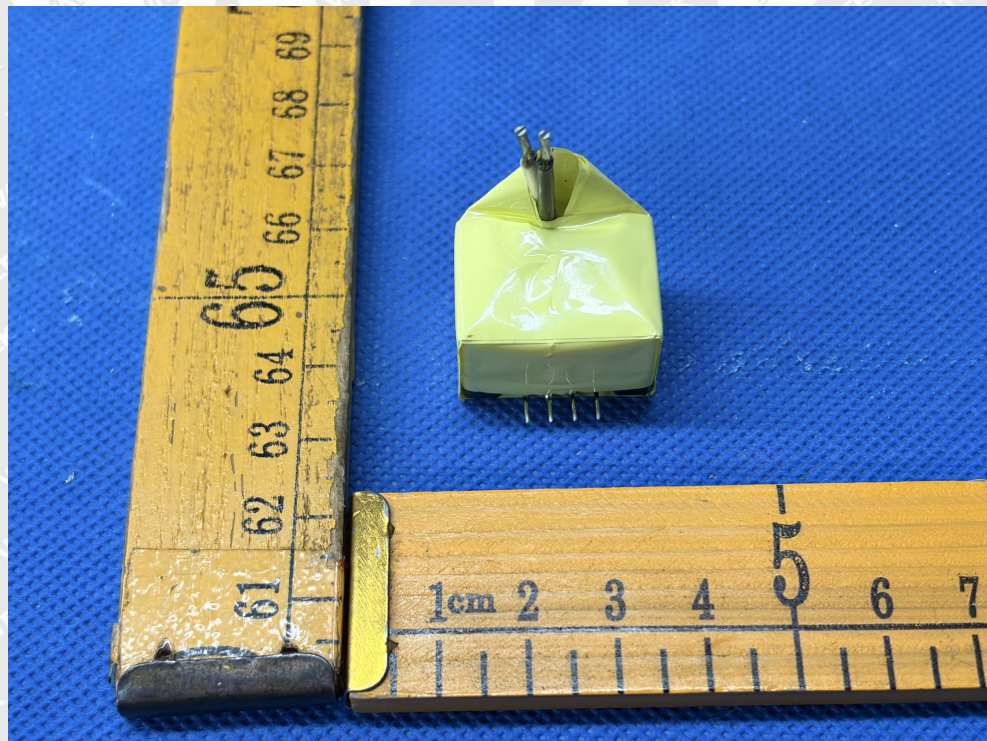


Picture 12 Transformer view




Photo Documentation

Reference No.: WTF26D01025446D

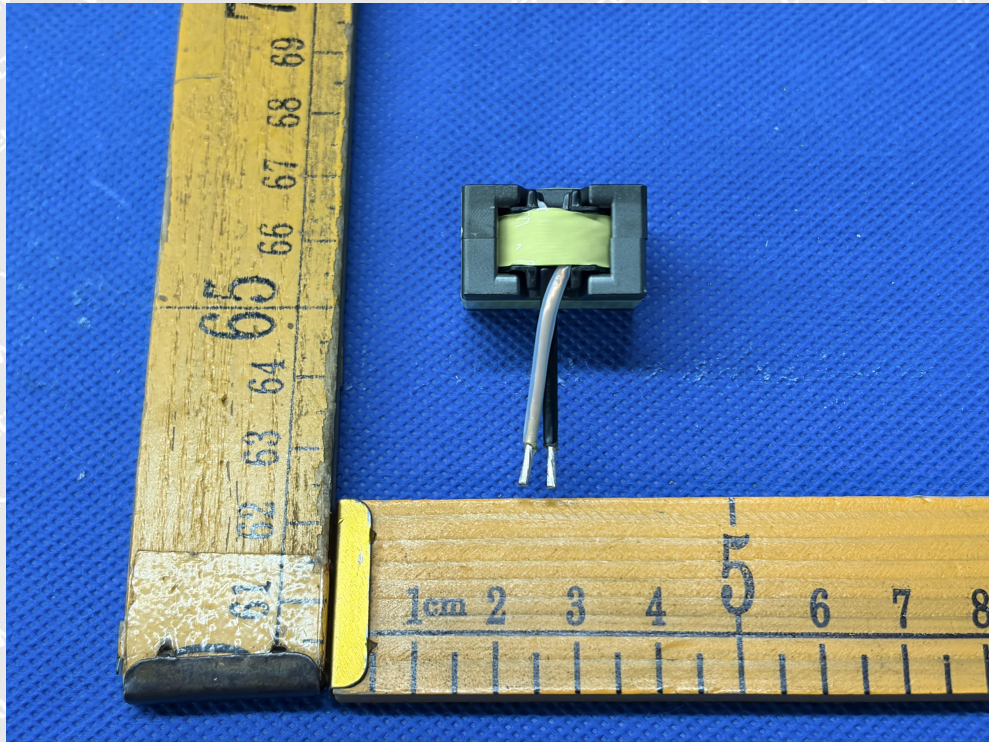

Picture 13 Transformer view

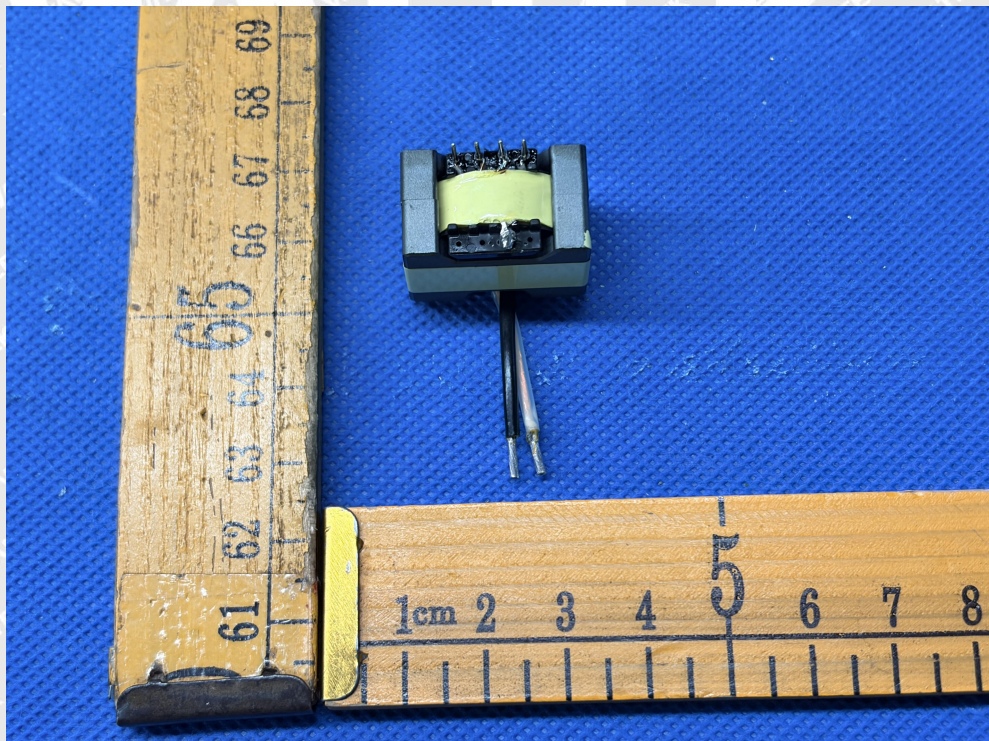


Picture 14 Transformer view




Photo Documentation

Reference No.: WTF26D01025446D

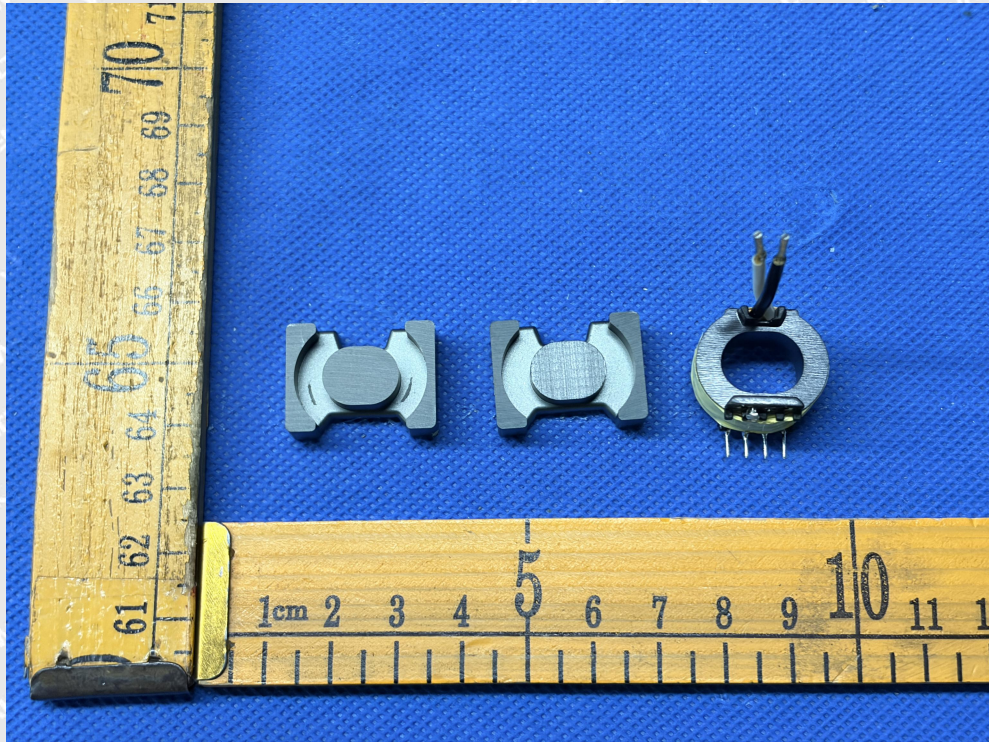

Picture 15 Transformer view

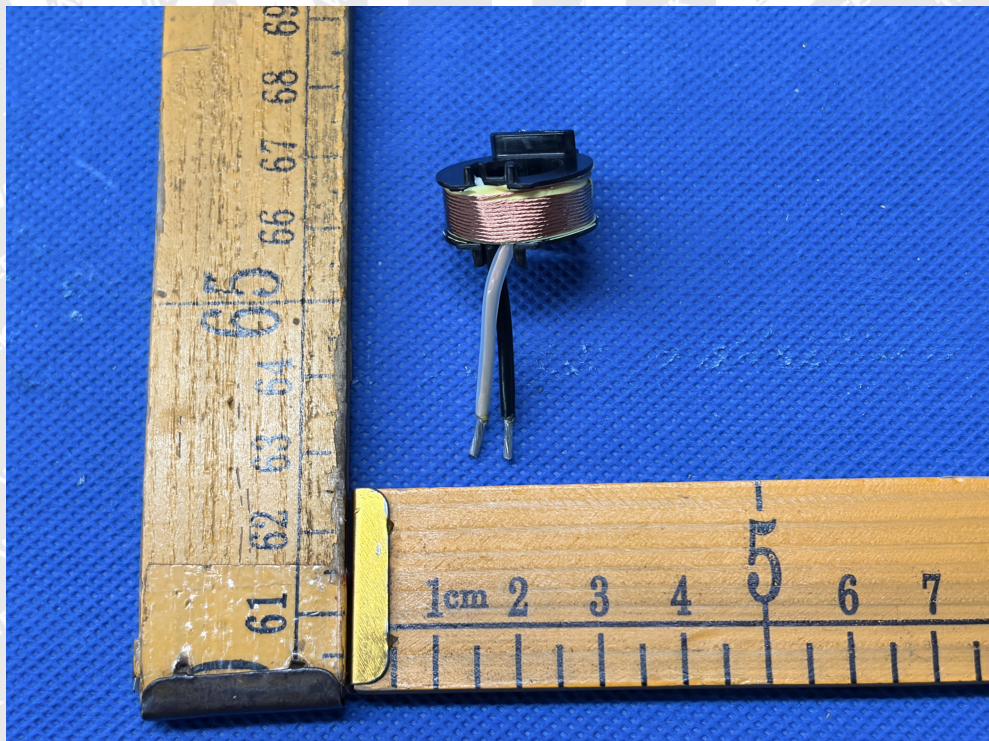


Picture 16 Transformer view




Photo Documentation

Reference No.: WTF26D01025446D

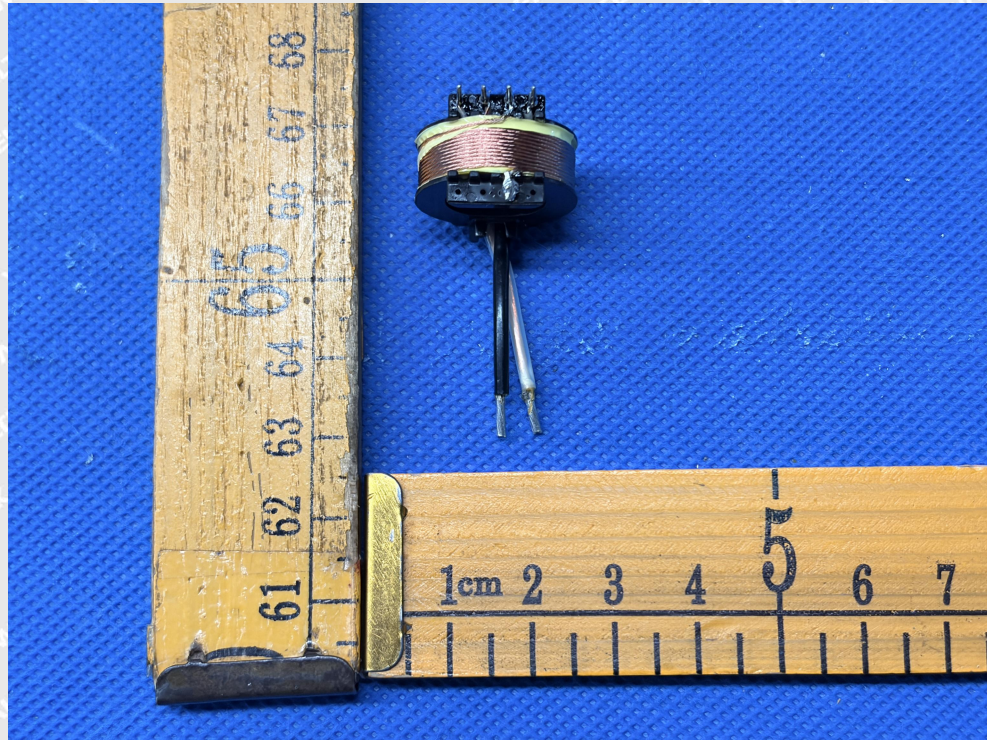

Picture 17 Transformer view

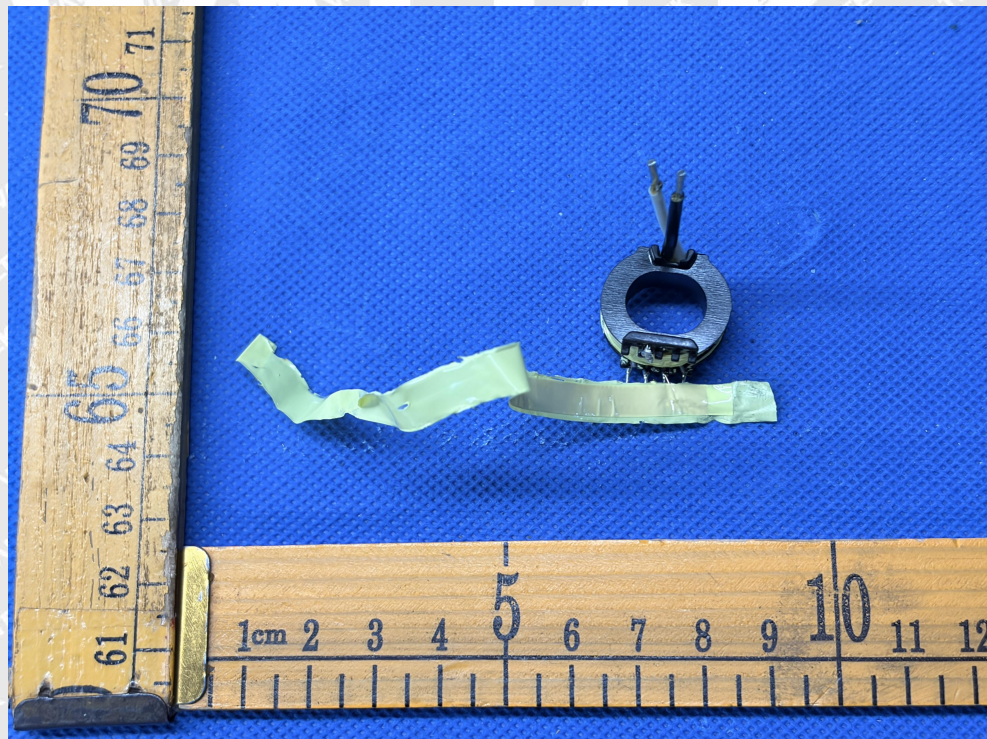


Picture 18 Transformer view




Photo Documentation

Reference No.: WTF26D01025446D

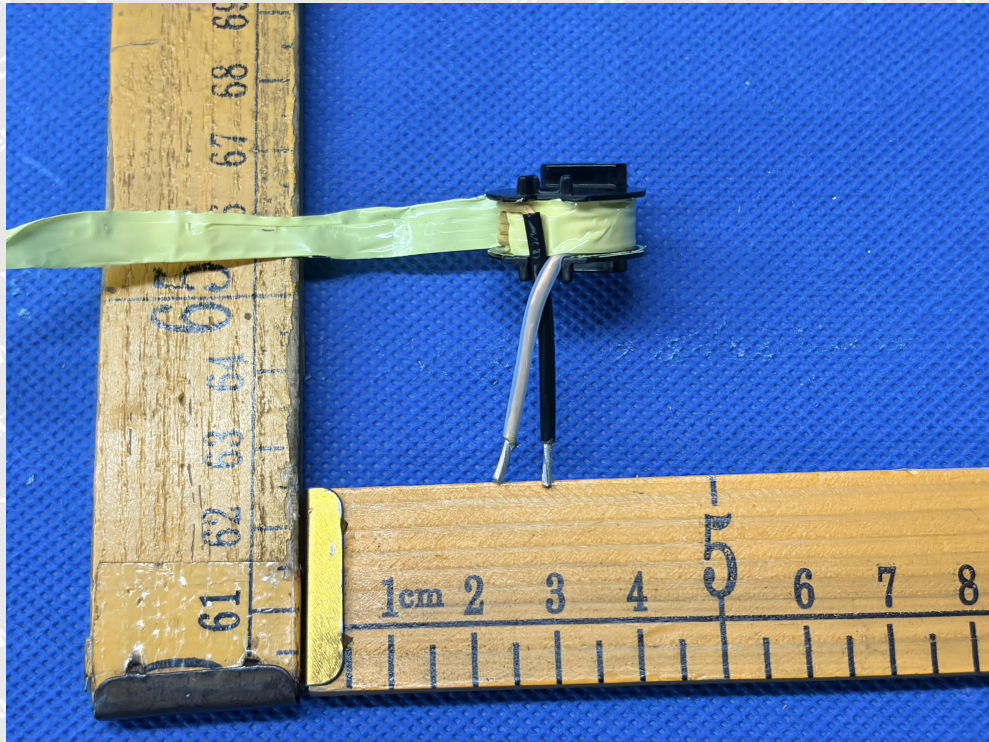

Picture 19 Transformer view

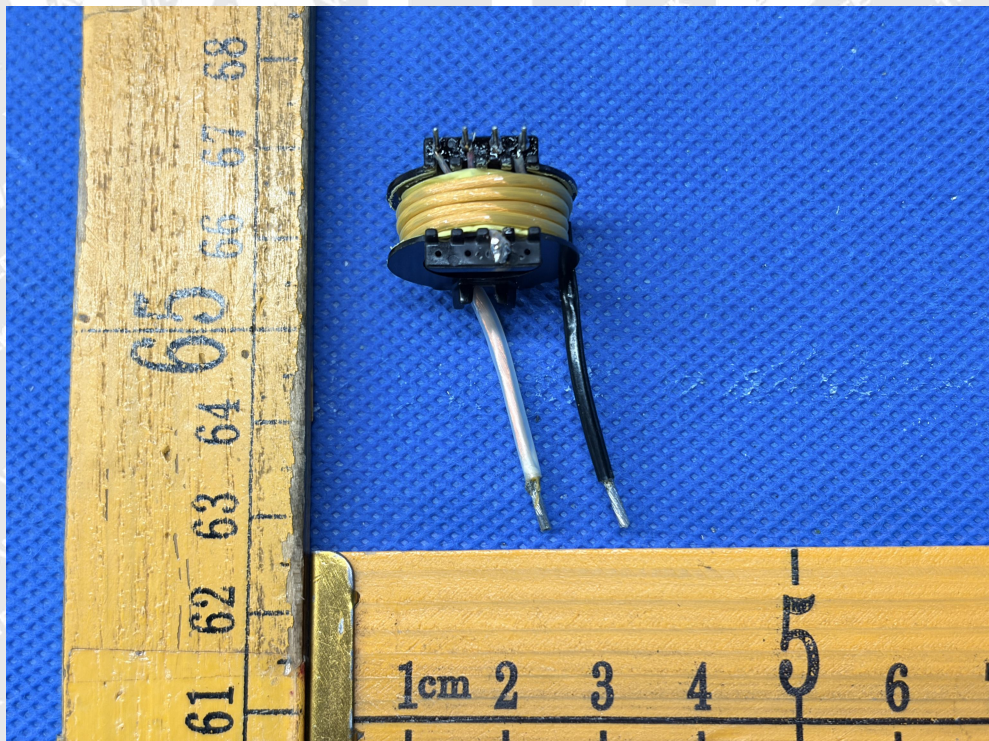


Picture 20 Transformer view



Photo Documentation

Reference No.: WTF26D01025446D

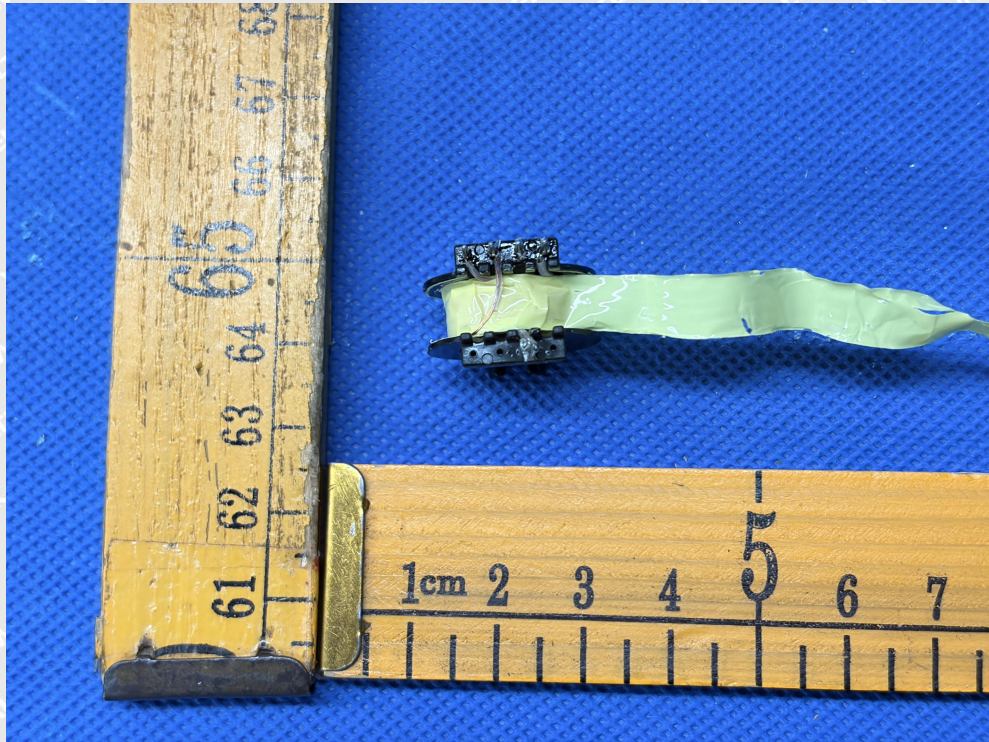

Picture 21 Transformer view



Picture 22 Transformer view

===== End of Report =====