
Radio Test Report

Report No.: AGC05443260547ER04

PRODUCT DESIGNATION : Charging and data cable
BRAND NAME : N/A
MODEL NAME : M03172
APPLICANT : MID OCEAN BRANDS B.V.
DATE OF ISSUE : Jun. 11, 2026
STANDARD(S) : ETSI EN 300 330 V2.1.1 (2017-02)
REPORT VERSION : V1.1

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 04, 2026	Invalid	Initial Release
V1.1	1 st	Jun. 11, 2026	Valid	Correct the Frequency Points of Section 2.2.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Table of Contents



1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency	6
2.3 Objective.....	6
2.4 Test Items and The Results	6
3. Setup of Equipment Under Test	7
3.1 Setup Configuration of EUT.....	7
3.2 Support Equipment.....	7
4. Test Environment	8
4.1 Address of The Test Laboratory	8
4.2 Test Facility	8
4.3 Environmental Conditions.....	9
4.4 Measurement Uncertainty	10
4.5 List of Equipment Used	11
5. ETSI EN 300 330 Requirements for Transmitter and Receiver	12
5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies.....	12
5.2 Transmitter H-Field Requirements.....	14
5.3 Transmitter Radiated Spurious Domain Emission (Limit<30MHz)	18
5.4 Transmitter Radiated Spurious Domain Emission (Limit > 30MHz)	20
Appendix I: Photographs of Test Setup	24
Appendix II: Photographs of Test EUT	25

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1. General Information

Applicant	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Factory	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Product Designation	Charging and data cable
Brand Name	N/A
Test Model	MO3172
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	May 18, 2026
Date of Test	May 18, 2026~Jun. 04, 2026
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-EU-RF ID-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By		
	Thea Huang (Project Engineer)	Jun. 11, 2026
Reviewed By		
	Bibo Zhang (Reviewer)	Jun. 11, 2026
Approved By		
	Angela Li (Authorized Officer)	Jun. 11, 2026

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2. Product Information

2.1 Product Technical Description

Permitted Range of Operating Frequency	148.5 KHz to 5 MHz (Manufacturer's declared frequency of product operation: 325KHz-330KHz)
Operation Frequency	326kHz
Hardware Version	V1.0
Software Version	V1.0
Modulation Type	ASK
Receiver Category	Class 3
Product Class	☒ Class 1 ☐ Class 2 ☐ Class 3 ☐ Class 4
Equipment Technology	☒ Tagging Systems ☐ System in the 27MHz Range ☐ all Other
Corrected Amplitude H-field	-26.19dBμA/m@10m
Antenna Designation	Coil Antenna
Power Supply	DC 5V/9V from Adapter
Input Rating	DC 5V/2A, 9V/3A
Output Rating	Wireless output for Apple Watch: 2.5W Max.

Note: For more details, refer to the user's manual of the EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

2.2 Test Frequency

The nominal operating frequency 326kHz declared by the manufacturer.

2.3 Objective

Perform Radio Spectrum tests for CE Marking according to the provisions of article 3.2 of the Radio Equipment Directive (2014/53/EU) for the RF ID function of the EUT.

2.4 Test Items and The Results

The tests were performed according to following standards:

ETSI EN 300 330 V2.1.1 (2017-02)	Short Range Devices (SRD); Radio equipment in the frequency range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz; Harmonized Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU
-------------------------------------	---

Test items and the results are as bellow:

No.	Test Item	Standard Require	Condition	Result
ETSI EN 300 330 for Transmitter Requirement				
1	Permitted Range of Operating Frequencies	sub-clause 4.3.1	/	Pass
2	Operating Frequency Ranges	sub-clause 4.3.2	/	Pass
3	Modulation Bandwidth	sub-clause 4.3.3	/	Pass
4	Transmitter H-field Requirements	sub-clause 4.3.4	Only for equipment under class 1 and class 2	Pass
5	Transmitter RF Carrier Current	sub-clause 4.3.5	Only for equipment under class 3	N/A
6	Transmitter Radiated E-field	sub-clause 4.3.6	Only for equipment under class 4	N/A
7	Transmitter Conducted Spurious Emissions	sub-clause 4.3.7	Only for equipment under class 3	N/A
8	Transmitter Radiated Spurious Domain Emission Limits < 30 MHz	sub-clause 4.3.8	/	Pass
9	Transmitter radiated spurious domain emission limits > 30 MHz	sub-clause 4.3.9	For equipment under class 1, 2 and 4	Pass
10	Transmitter Frequency Stability	sub-clause 4.3.10	Only for channelized systems	N/A
ETSI EN 300 330 for Receiver Requirement				
1	Receiver Spurious Emissions	sub-clause 4.4.2	Does only apply to receivers which a not co-located with transmitters	N/A
2	Adjacent Channel Selectivity	sub-clause 4.4.3	Only for channelized systems	N/A
3	Receiver locking or Desensitization	sub-clause 4.4.4	Not for tagging systems	N/A

Note: N/A means not applicable. This equipment does not meet the above test item evaluation conditions, so it is not applicable.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

3. Setup of Equipment Under Test

3.1 Setup Configuration of EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

3.2 Support Equipment

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
Yes				
Item	Equipment	Trade Name	Model No.	Specification
1	Apple Watch	Apple	N/A	Support 2.5W
2	Adapter	HUAWEI	HW-200440C00	Input(AC):100V-240V 50/60Hz 2.4A Output(DC):USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;15V/3A;20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

4. Test Environment

4.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

4.3 Environmental Conditions

Normal Condition	Temperature	15 °C to 35 °C	
	Relative humidity	20 % to 75 %.	
	Voltage	☐ Mains voltage	Nominal mains voltage
		☐ Lead-acid battery	1.1 * the nominal voltage of the battery
		☒ Other	the normal test voltage shall be that declared by the equipment provider
Extreme Condition	Temperature	☐ -20°C to + 55°C for Category I (General)	
		☐ -10 °C to +55 °C for Category II (Portable)	
		☒ 0 °C to +35 °C for Category III (Equipment for normal indoor use)	
	Voltage	☐ Mains voltage	±10 %* the nominal mains voltage
		☐ Lead-acid battery	1,3 and 0,9 multiplied by the nominal voltage of the battery
		☒ Leclanché or the lithium battery	Lower extreme voltage: 0.85*the nominal voltage upper extreme voltage: declared by the equipment provider
		☐ Nickel-cadmium battery	Lower extreme voltage: 0.9*the nominal voltage upper extreme voltage: declared by the equipment provider
		☐ Other	the normal test voltage shall be that declared by the equipment provider

Normal Condition	VN=nominal Voltage	DC 9.0V
	TN=normal Temperature	25 °C
Extreme Condition	VL=lower Voltage	DC 8.1V
	TL=lower Temperature	-20 °C
	VH=higher Voltage	DC 9.9V
	TH=higher Temperature	40 °C

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

4.4 Measurement Uncertainty

Test Items	Measurement Uncertainty	Notes
Frequency error	18Hz	(1)
Transmitter power conducted	0.63dB	(1)
Transmitter power Radiated	2.38dB	(1)
Radiated spurious emission 9kHz-30MHz	3.45dB	(1)
Radiated Emissions 30~1000MHz	4.80 dB	(1)

Note:

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4.5 List of Equipment Used

● Radiated Spurious Emission& RF Conducted Test							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	100096	2026-01-13	2027-01-12
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2026-05-20	2027-05-19
☒	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2025-01-14	2027-01-13
☒	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-08-03	2026-07-23
☒	AGC-EM-E086	Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	2026-01-14	2028-01-13
☒	AGC-EM-E017	Power Amplifier	AR	75A250	18464	2025-07-18	2026-07-17

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☒	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

5. ETSI EN 300 330 Requirements for Transmitter and Receiver

5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies

The operating frequency range (OFR) is the frequency range over which the EUT is transmitting. The operating frequency range of the EUT is determined by the lowest (f_L) and highest frequency (f_H) as occupied by the power envelope. With the center frequency of the OFR as: $f_C = (f_H + f_L)/2$. An EUT could have more than one operating frequency range.

Test Limit


Table 1: Short Range Devices within the 9 kHz to 30 MHz permitted frequency bands

	Frequency Bands/frequencies	Applications
Transmit and Receive	9 kHz to 90 kHz	Inductive devices, Generic use
Transmit and Receive	90 kHz to 119 kHz	Inductive devices, Generic use
Transmit and Receive	119 kHz to 140 kHz	Inductive devices, Generic use
Transmit and Receive	140 kHz to 148,5 kHz	Inductive devices, Generic use
Transmit and Receive	148,5 kHz to 5 MHz	Inductive devices, Generic use
Transmit and Receive	400 kHz to 600 kHz	RFID only
Transmit and Receive	5 MHz to 30 MHz	Inductive devices, Generic use
Transmit and Receive	3 155 kHz to 3 400 kHz	Inductive devices, Generic use
Transmit and Receive	984 kHz to 7 484 kHz (Note 3, Centre frequency is 4 234 kHz)	Inductive devices, Railway applications
Transmit and Receive	4 516 kHz	Inductive devices, Railway applications
Transmit and Receive	6 765 kHz to 6 795 kHz	Inductive devices, Generic use
Transmit and Receive	7 400 kHz to 8 800 kHz	Inductive devices, Generic use
Transmit and Receive	10 200 kHz to 11,000 MHz	Inductive devices, Generic use
Transmit and Receive	11,810 MHz to 15,310 MHz (Centre frequency is 13,56 MHz)	RFID only
Transmit and Receive	12,5 MHz to 20 MHz	Inductive devices, Wireless healthcare
Transmit and Receive	13,553 MHz to 13,567 MHz	Inductive devices, Generic use
Transmit and Receive	26,957 MHz to 27,283 MHz	Inductive devices, Generic use
Transmit and Receive	27,090 MHz to 27,100 MHz	Inductive devices, Railway applications
NOTE 1: In addition, it should be noted that other frequency bands may be available in a country within the frequency range 9 kHz to 30 MHz.		
NOTE 2: On non-harmonised parameters, national administrations may impose certain conditions such as the type of modulation, frequency, channel/frequency separations, maximum transmitter radiated power, duty cycle, and the inclusion of an automatic transmitter shut-off facility, as a condition for the issue of an Individual Rights for use of spectrum or General Authorization, or as a condition for use under "licence exemption" as it is in most cases for Short Range Devices.		
NOTE 3: Transmitting only on receipt of a Balise/Eurobalise tele-powering signal from a train.		

The frequency ranges and limits of the present document are based on the European Commission Decision for SRDs [i.10], CEPT/ERC/REC 70-03 [i.1].

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Setup

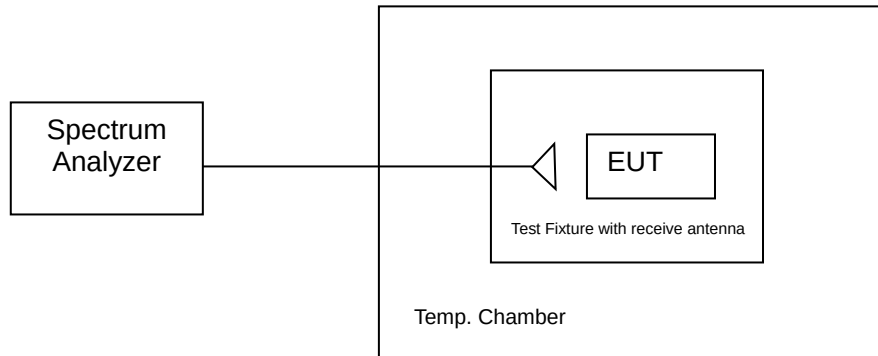

Test Procedure

1. Please refer to ETSI EN 300 330 (V2.1.1) Sub-clause 5.5 and Sub-clause 5.6 for the test conditions.
2. Please refer to ETSI EN 300 330 (V2.1.1) Sub-clause 6.2.2 for the measurement method.

Test Result

Test Conditions			99% Bandwidth (kHz)	F _L at 99% BW (kHz)	F _H at 99% BW (kHz)	Limit Band (kHz)	Result
Frequency (kHz)	Temperature (°C)	Voltage (V)					
326	25	9.0	0.750	325.641	326.384	301.55 ~350.45	Pass
	-20	9.9	0.706	325.662	326.360		Pass
		8.1	0.743	325.642	326.382		Pass
	40	9.9	0.778	325.614	326.387		Pass
		8.1	0.743	325.631	326.368		Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5.2 Transmitter H-Field Requirements

In the case of a transmitter with an integral or dedicated antenna, the radiated H-field is defined in the direction of maximum field strength under specified conditions of measurement.

Test Limit

Table 2: H-field limits at 10 m

Frequency range (MHz)	H-field strength limit (H_f) dB μ A/m at 10 m or specified in mW e.r.p.
$0,009 \leq f < 0,090$	72 descending 3 dB/oct above 0,03 MHz or according to note 1 (see note 5)
$0,09 \leq f < 0,119$	42
$0,119 \leq f < 0,135$	66 descending 3 dB/oct above 0,119 MHz or according to note 1 (see notes 3 and 5)
$0,135 \leq f < 0,140$	42
$0,140 \leq f < 0,1485$	37,7
$0,1485 \leq f < 30$	-5 (see note 4)
$0,315 \leq f < 0,600$	-5
$3,155 \leq f < 3,400$	13,5
4,234	9 (see note 9)
4,516	7
$7,400 \leq f < 8,800$	9
$10,2 \leq f < 11,00$	9
$12,5 \leq f \leq 20$	-7
$6,765 \leq f \leq 6,795$	42 (see notes 3 and 7)
$26,957 \leq f \leq 27,283$	42 (see note 3)
$13,410 \leq f \leq 13,553$, $13,567 \leq f \leq 13,710$	9 (see note 6)
$13,110 \leq f \leq 13,410$, $13,710 \leq f \leq 14,010$	-3,5 (see note 6)
$12,660 \leq f \leq 13,110$, $14,010 \leq f \leq 14,460$	-10 (see note 6)
$11,810 \leq f \leq 12,660$, $14,460 \leq f \leq 15,310$	-16 (see note 6)
$13,460 \leq f \leq 13,553$, $13,567 \leq f \leq 13,660$	27 (see note 6)
$13,360 \leq f \leq 13,460$, $13,660 \leq f \leq 13,760$	Linear transition from 27 to -3,5 (see note 6)
$13,110 \leq f \leq 13,360$, $13,760 \leq f \leq 14,010$	-3,5 (see note 6)
$12,660 \leq f \leq 13,110$, $14,010 \leq f \leq 14,460$	-5 (see note 6)
$13,553 \leq f \leq 13,567$	42 (see note 3) or 60 (see notes 2 and 3)
27,095	42

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Frequency range (MHz)	H-field strength limit (H_f) dB μ A/m at 10 m or specified in mW e.r.p.
26,995, 27,045, 27,095, 27,145, 27,195 (see note 8)	100 mW
NOTE 1: For the frequency ranges 9 kHz to 135 kHz, the following additional restrictions apply to limits above 42 dBμA/m: - for loop coil antennas with an area $\geq 0,16 \text{ m}^2$ this table and table B.1 with the antenna limitations apply; - for loop coil antennas with an area between $0,05 \text{ m}^2$ and $0,16 \text{ m}^2$ table B.1 applies with a correction factor. The limit is: table value + $10 \times \log(\text{area}/0,16 \text{ m}^2)$; - for loop coil antennas with an area $< 0,05 \text{ m}^2$ the limit is 10 dB below table B.1. NOTE 2: For RFID (incl. NFC) and EAS applications only. NOTE 3: Spectrum mask limit, see annex I. NOTE 4: For further information see annex G. NOTE 5: Limit is 42 dBμA/m for the following spot frequencies: 60 kHz $\pm$ 250 Hz, 66,6 kHz $\pm$ 750 Hz, 75 kHz $\pm$ 250 Hz, 77,5 kHz $\pm$ 250 Hz, and 129,1 kHz $\pm$ 500 Hz. NOTE 6: Only in conjunction with spectrum mask, see annex I. NOTE 7: The frequency range 6,765 MHz - 6,795 MHz is not a harmonised ISM frequency band according article 5.138 of the ITU Radio Regulations [i.13]. NOTE 8: Center frequencies for channelized systems by using ≤ 10 kHz bandwidth. NOTE 9: The limit is valid in the range 984 kHz - 7 484 kHz for Transmitting only on receipt of a Balise/Eurobalise tele-powering signal from a train.	

The H-field limit in dB μ A/m at 3 m, H_{3m} , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 \quad (\text{F.2})$$

Where: H_{10m} is the H-field limit in dB μ A/m at 10 m distance according to the present document; and C_3 is a conversion factor in dB determined from figure F.2.

The limit at 10 m (H_{10m}) is 60 dB μ A/m or 66 dB μ A/m

For 13.65MHz:

Owing to the frequency EUT is 13.56MHz, so the C_3 approach to 23dB.

Then the limit at 3m (H_{3m}) = $H_{10m} + C_3 = 60 + 23 = 83$ dB μ A/m.

The H Field Strength shall not exceed the values 83 dB μ A/m 3m Distance under normal test conditions.

For 0.36MHz:

Owing to the frequency EUT is 0.36MHz, so the C_3 approach to 31.65dB.

Then the limit at 3m (H_{3m}) = $H_{10m} + C_3 = 66 + 31.65 = 97.65$ dB μ A/m.

The H Field Strength shall not exceed the values 97.65 dB μ A/m 3m Distance under normal test conditions.

- $E(\text{dB}\mu\text{V/m}) = \text{dB}\mu\text{A/m} + 51.5$;
- $\text{ERP}(\text{dBm}) = E(\text{dB}\mu\text{V/m}) + 20\lg(D) - 104.8$, D is the measurement distance;
- $\text{ERP} = 10\lg P(\text{mW})$


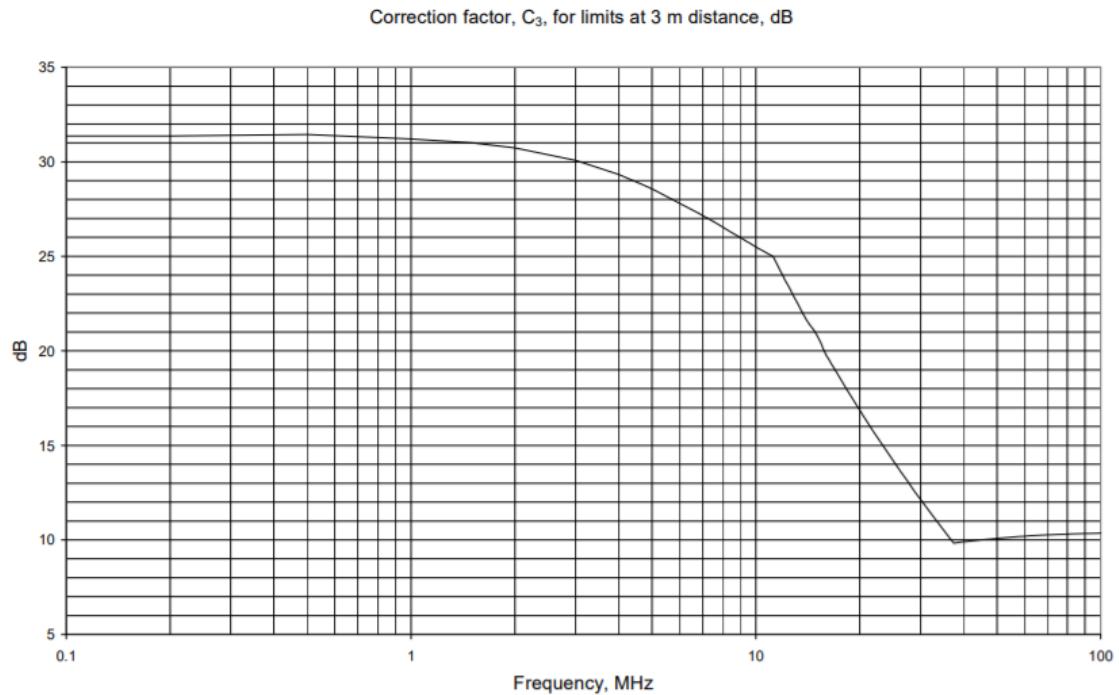


Figure H.2: Conversion factor C_3 versus frequency

Test Setup

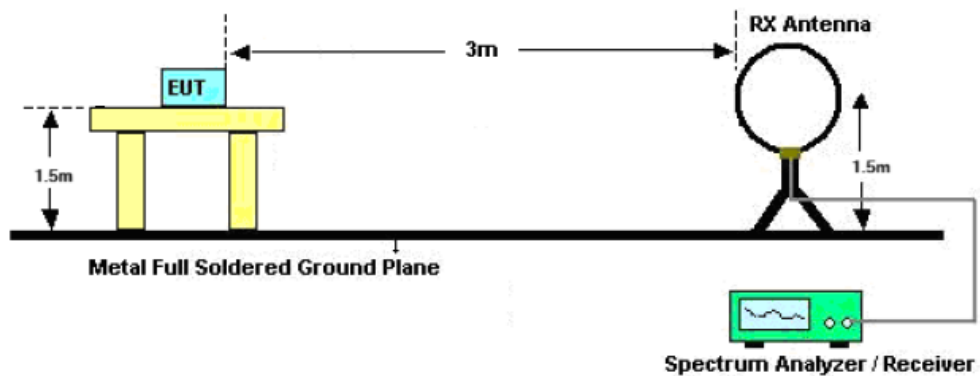

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Procedure

The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12.

The EUT operate with modulation under normal and extreme conditions.

Test Result

Test Mode: Transmitting

Test conditions	Test Temp.	Test Volt.	Note
TN/VN	25°C	9.0V	Worst case
TL/ VL	-20°C	9.9V	-
TH/VL	40°C	9.9V	-
TL/VH	-20°C	8.1V	-
TH/VH	40°C	8.1V	-

Frequency (kHz)	Reading (dBμV/m)	Corrected Factor (dB)	Field Strength at 3m (dBμV/m)	Field Strength at 3m (dBμA/m)	Calculated at 10m (dBμA/m)	Limit at 10m (dBμA/m)	Result
326	33.35	23.16	56.51	5.01	-26.19	-5.00	Pass

Remark:

- E-Field Strength(dBμV/m) = Reading Level + Corrected Factor
- For the calculated method, please refer to Annex H at EN 300 330.
- All extreme conditions were considered for test, but only record the worst case.
- EIRP(dBm)= E-Field Strength(dBμV/m)+20lg(D)-104.8, D is the measurement distance.
- E-Field Strength(dBμV/m)=H-Field Strength(dBμA/m)+51.5, so the dBμA/m=EIRP(dBm)+43.7, EIRP=10lgP(mW)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


5.3 Transmitter Radiated Spurious Domain Emission (Limit<30MHz)

Spurious domain emission limits are limits on emissions at frequencies other than those of the carrier and sidebands associated (clauses 4.3.2 and 4.3.3) with normal test modulation (clause 5.8).

Test Limit

Operating Mode		
Frequency Range	Distance	Maximum Field Strength Limit
$9\text{ kHz} \leq f < 10\text{ MHz}$	10m	27dBμA/m at 9 kHz descending 3 dB/oct
$10\text{ MHz} \leq f < 30\text{ MHz}$	10m	-3.5 dBμA/m
Stand-by Mode		
$9\text{ kHz} \leq f < 10\text{ MHz}$	10m	5.5dBμA/m at 9 kHz descending 3 dB/oct
$10\text{ MHz} \leq f < 30\text{ MHz}$	10m	-25 dBμA/m

Test Setup

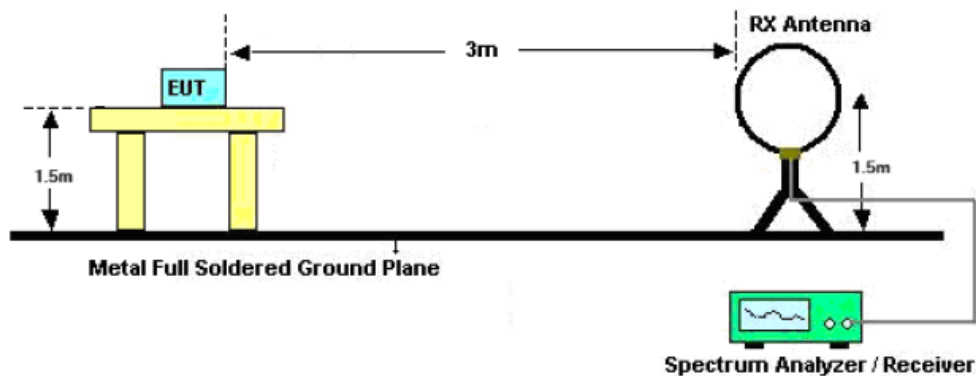

Test Procedure

For test method of frequency range (9 kHz-30MHz)

The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Test Result

FREQUENCY RANGE (9KHZ-30MHZ)

OPERATION MODE					
Frequency	Reading level	Total Factor	Emission level	10M Limit	Margin
(MHz)	(dBμA/m)	(dB)	(dB μA/m)	(dBμA/m)	(dBμA/m)
--	--	--	--	27 dBμA/m at 9KHz descending 3dB/oct(9KHz – 10MHz)	--
--	--	--	--		--
--	--	--	--	-3.5 dBμA/m(10MHz – 30MHz)	--
--	--	--	--		--

STANDBY MODE					
Frequency	Reading level	Total Factor	Emission level	10M Limit	Margin
(MHz)	(dBμA/m)	(dB)	(dB μA/m)	(dBμA/m)	(dBμA/m)
--	--	--	--	5.5 dBμA/m at 9KHz descending 3dB/oct (9KHz – 10MHz)	--
--	--	--	--		--
--	--	--	--	-25 dBμA/m (10MHz – 30MHz)	--
--	--	--	--		--

Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.
- (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


5.4 Transmitter Radiated Spurious Domain Emission (Limit > 30MHz)

Spurious emissions are emissions at frequencies other than those of the carrier and sidebands associated with normal modulation.

Test Limit

Frequency Range	Operating Mode Limit	Standby Mode Limit
47 MHz to 74 MHz	4 nW	2 nW
87.5 MHz to 118 MHz	4 nW	2 nW
174 MHz to 230 MHz	4 nW	2 nW
470 MHz to 790 MHz	4 nW	2 nW
Other frequency between 30 MHz to 1000 MHz	250 nW	2 nW

Test Setup

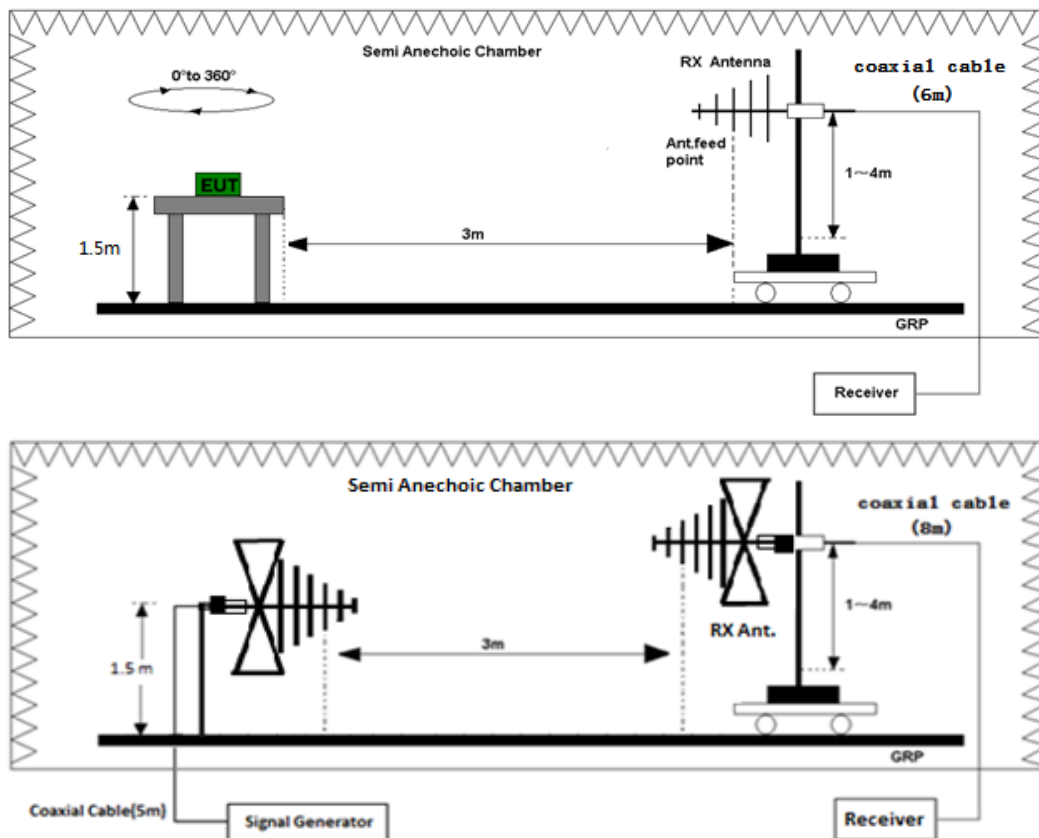

Radiated Emission Test Set-Up Frequency 30 MHz ~ 1 GHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Procedure

For test method of frequency range (30 MHz-1000MHz)

EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.



The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.

Factor=Antenna Factor + Cable loss, Margin=Limit- Measurement Level.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The worst case and recorded in the report.

Test Result

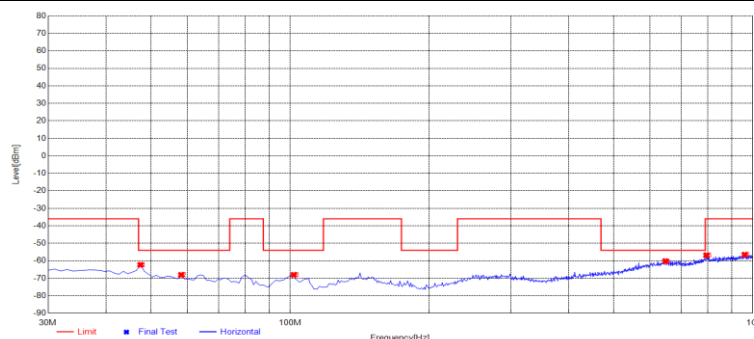
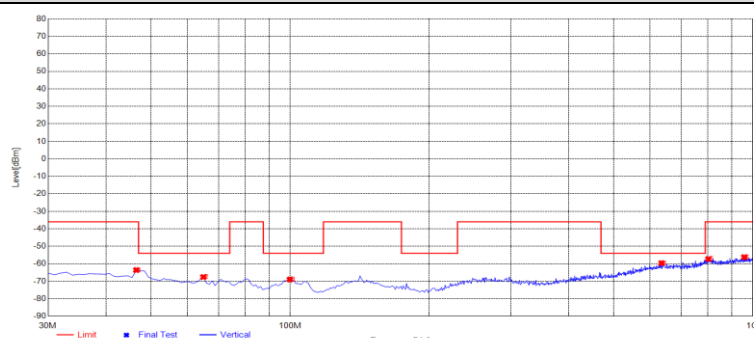
Test mode:	Operating	Test Frequency:	326kHz					
Horizontal								
								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	47.46	-90.52	-62.30	-54.00	8.30	28.22	20	Horizontal
2	58.13	-94.41	-68.03	-54.00	14.03	26.38	340	Horizontal
3	101.78	-87.94	-68.03	-54.00	14.03	19.91	350	Horizontal
4	647.89	-94.46	-60.17	-54.00	6.17	34.29	20	Horizontal
5	794.36	-93.63	-56.78	-36.00	20.78	36.85	240	Horizontal
6	961.2	-94.48	-56.48	-36.00	20.48	38.00	360	Horizontal
Vertical								
								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	46.49	-91.93	-63.56	-36.00	27.56	28.37	220	Vertical
2	64.92	-92.75	-67.53	-54.00	13.53	25.22	30	Vertical
3	99.84	-88.81	-68.95	-54.00	14.95	19.86	300	Vertical
4	635.28	-94.03	-59.59	-54.00	5.59	34.44	160	Vertical
5	802.12	-94.40	-57.27	-36.00	21.27	37.13	270	Vertical
6	959.26	-94.22	-56.20	-36.00	20.20	38.02	190	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

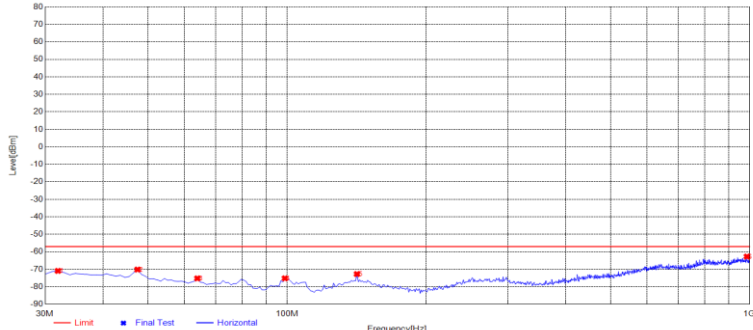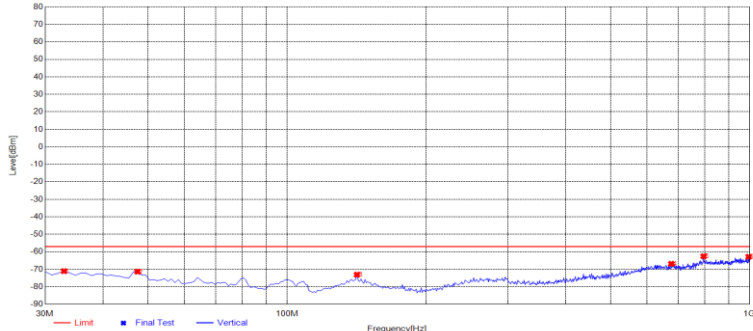Test mode:	Standby	Test Frequency:	326kHz					
Horizontal								
								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	31.94	-100.46	-70.89	-57.00	13.89	29.57	20	Horizontal
2	47.46	-98.35	-70.13	-57.00	13.13	28.22	130	Horizontal
3	63.95	-100.57	-75.18	-57.00	18.18	25.39	310	Horizontal
4	98.87	-95.18	-75.14	-57.00	18.14	20.04	170	Horizontal
5	141.55	-99.51	-72.69	-57.00	15.69	26.82	250	Horizontal
6	986.42	-100.64	-62.71	-57.00	5.71	37.93	30	Horizontal
Vertical								
								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	32.91	-100.62	-71.03	-57.00	14.03	29.59	100	Vertical
2	47.46	-99.53	-71.31	-57.00	14.31	28.22	110	Vertical
3	141.55	-99.88	-73.06	-57.00	16.06	26.82	220	Vertical
4	676.99	-100.98	-66.85	-57.00	9.85	34.13	60	Vertical
5	795.33	-99.47	-62.57	-57.00	5.57	36.90	70	Vertical
6	995.15	-100.70	-62.85	-57.00	5.85	37.85	340	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Appendix I: Photographs of Test Setup

Radiated Spurious Emissions Below 30MHz Test Setup



Radiated Spurious Emissions Below 1GHz Test Setup



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC05443260547AP01

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

-----End of Report-----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Radio Test Report

Report No.: AGC05443260547ER03

PRODUCT DESIGNATION : Charging and data cable
BRAND NAME : N/A
MODEL NAME : M03172
APPLICANT : MID OCEAN BRANDS B.V.
DATE OF ISSUE : Jun. 04, 2026
STANDARD(S) : ETSI EN 303 417 V1.1.1 (2017-09)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 04, 2026	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Table of Contents



1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Objective.....	6
2.3 Test Items and The Results	6
2.3 Overview of Operational Modes within a WPT System	7
2.4 Description of Test Modes	7
3. Setup of Equipment Under Test	8
3.1 Setup Configuration of EUT	8
3.2 Support Equipment.....	9
4. Test Environment	10
4.1 Address of The Test Laboratory	10
4.2 Test Facility	10
4.3 Environmental Conditions	11
4.4 Measurement Uncertainty	11
4.5 List of Equipment Used	12
5. ETSI EN 303 417 Requirements for Transmitter and Receiver	13
5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies.....	13
5.2 Transmitter H-Field Requirements.....	16
5.3 Transmitter Out of Band (OOB) Emissions	19
5.4 Transmitter Spurious Emissions (Frequency Below 30MHz)	22
5.5 Transmitter Spurious Emissions (Frequency Above 30MHz)	25
5.6 Receiver Blocking	28
Appendix I: Photographs of Test Setup	30
Appendix II: Photographs of Test EUT	31

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1. General Information

Applicant	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Factory	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Product Designation	Charging and data cable
Brand Name	N/A
Test Model	MO3172
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	May 18, 2026
Date of Test	May 18, 2026~Jun. 04, 2026
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-EU-WPT-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By		
	Thea Huang (Project Engineer)	Jun. 04, 2026
Reviewed By		
	Bibo Zhang (Reviewer)	Jun. 04, 2026
Approved By		
	Angela Li (Authorized Officer)	Jun. 04, 2026

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2. Product Information

2.1 Product Technical Description

Equipment Type	WPT System
Permitted Range of Operating Frequency	☐ WPT Band 1: 19~21kHz
	☐ WPT Band 2: 59~61kHz
	☐ WPT Band 3: 79~90kHz
	☒ WPT Band 4: 100~119kHz,119~140kHz,140~148.5kHz
	☒ WPT Band 4: 148.5~300kHz
	☐ WPT Band 5: 6765kHz~6795kHz
Operation Frequency	110kHz-205kHz
Hardware Version	V1.0
Software Version	V1.0
Modulation Type	ASK
Corrected Amplitude H-field@10m	-16.01dBμA/m (Max.)
Antenna Designation	Coil Antenna
Input Rating	DC 5V/2A, 9V/3A
Output Rating	Wireless output for Earbud: 3W Max.

Note: For more details, refer to the user's manual of the EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

2.2 Objective

Perform Radio Spectrum tests for CE Marking according to the provisions of article 3.2 of the Radio Equipment Directive (2014/53/EU) for the WPT function of the EUT.

2.3 Test Items and The Results

The tests were performed according to following standards:

ETSI EN 303 417 V1.1.1 (2017-09)	Wireless power transmission systems, using technologies other than radio frequency beam in the 19-21kHz,59-61kHz,79-90kHz,100-300 kHz, 6765-6795kHz ranges; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU
-------------------------------------	--

Test items and the results are as bellow:

No.	Test Item	Standard Require	Condition	Result
Harmonised Standard ETSI EN 303 417				
1	Permitted range of Operating Frequencies	sub-clause 4.3.2	/	Pass
2	Operating Frequency Ranges	sub-clause 4.3.3	/	Pass
3	H-field Requirements	sub-clause 4.3.4	/	Pass
4	Transmitter Spurious Emissions	sub-clause 4.3.5	/	Pass
5	Transmitter Out of Band (OOB) Emissions	sub-clause 4.3.6	/	Pass
6	WPT System Unwanted Conducted Emissions	sub-clause 4.3.7	Only for equipment which has a cable between the off board power supply and the primary coil which is longer than 3 m	N/A
7	Receiver Blocking	sub-clause 4.4.2	Only for Mode1, Mode2 and Mode3 (see Table 2)	Pass

Note: N/A means not applicable. This equipment does not meet the above test item evaluation conditions, so it is not applicable.

2.3 Overview of Operational Modes within a WPT System

EN 303 417 Clauses 4.2.3 Table 2: Overview of operational modes within a WPT system					
Operational Mode	Set-up	Function of base station	Function of mobile device	Test Scenario	Conformance Requirements
Mode 1: base station in stand-by, idle mode	Single device	TX	Not applicable	Single radiation test (TX) with the base station/charging pad. The test set-up as described in clause 6.1.2 shall be used.	- Operating frequency range (clause 4.3.3) - H-Field emission (clause 4.3.4) - TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) - Performance criteria test (RX test) (clause 4.4)
Mode 2: Communication before charging, adjustment charging mode / position	In combination	TX and RX	TX and RX	Specific test setup, declared by the manufacturer. Manufacturer shall declare the maximal distance between base station and mobile device the WPT system is able to communicate (distance D). The test setup- up shall be performed with the largest communication distance. The test set-up as described in clause 6.1.3 shall be used.	- Operating frequency range (clause 4.3.3) - H-Field emission (clause 4.3.4) - TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) - Wanted performance criteria test (RX test) (clause 4.4)
Mode 3: Communication	WPT system alignment	TX and RX	TX and RX	- Worst case alignment - Both tests can be performed within one set-up, worst-case alignment. - The test set-up as described in clause 6.1.4 shall be used.	- Operating frequency range (clause 4.3.3) - H-Field emission (clause 4.3.4) - TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) - Wanted Performance criteria test (RX test) (clause 4.4)
Mode 4: energy transmission	WPT system alignment	TX and RX	TX and RX		

2.4 Description of Test Modes

No.	Test Mode Description	Test Channel		
		Lowest	Middle	Highest
1	base station in stand-by, idle mode	/		
2	Communication before charging, adjustment charging mode / position	/	/	/
3	Communication	148.23kHz		
4	Energy transmission	115.9kHz	125.5kHz	148.2kHz

Note:


- During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- Mode 1 is only for base station function equipment and is not taken into consideration
- Mode 3 and mode 4 have been performed within one set-up, worst-case alignment.
- The communication frequency 148.23 kHz corresponds to the maximum field strength.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


3. Setup of Equipment Under Test

3.1 Setup Configuration of EUT


◆ Mode 1: Idle Mode

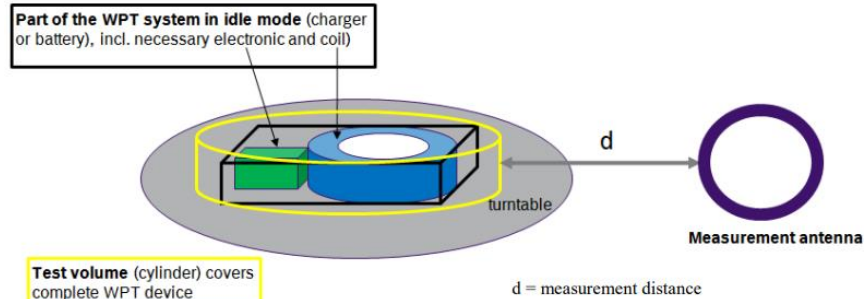

◆ Mode 2: Charging Adjustment

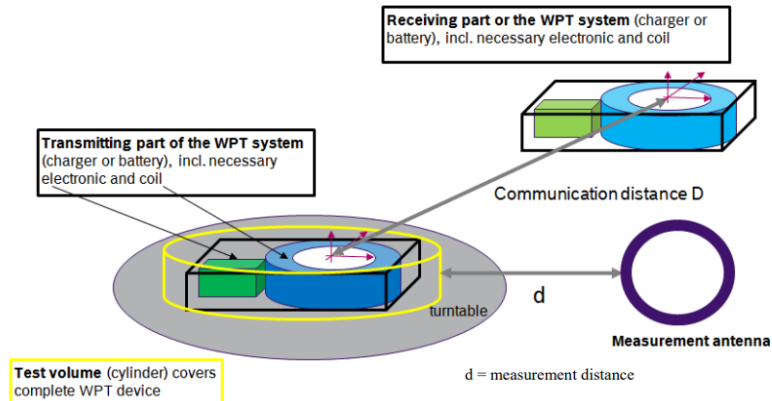

◆ Mode 3 and Mode 4: Power Transmission Arrangement

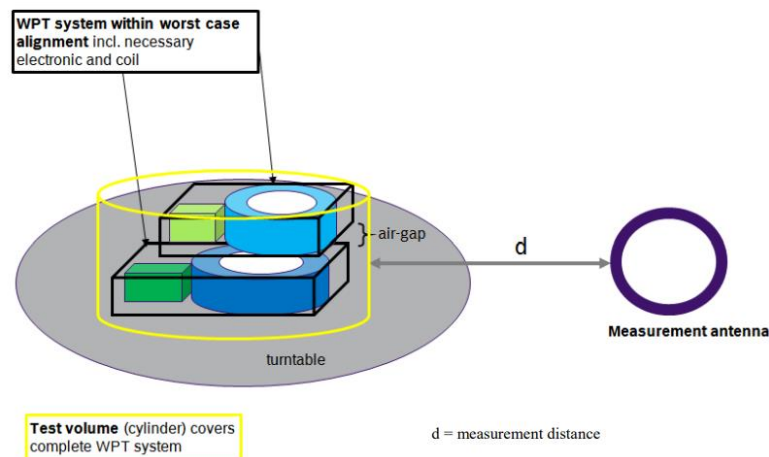

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

3.2 Support Equipment

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
Yes				
Item	Equipment	Trade Name	Model No.	Specification
1	Earbud	--	--	Support 3W
2	Adapter	Apple	A2452	USB-C/140W

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4. Test Environment

4.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

4.3 Environmental Conditions

Normal Condition	VN=nominal Voltage	DC 9V
	TN=normal Temperature	25 °C
Extreme Condition	VL=lower Voltage	DC 8.1V
	TL=lower Temperature	-20 °C
	VH=higher Voltage	DC 9.9V
	TH=higher Temperature	40 °C

Note: The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.

4.4 Measurement Uncertainty

Test Items	Measurement Uncertainty
Frequency error	$\pm 1 \times 10^{-7}$
Transmitter power conducted	$\pm 0.75\text{dB}$
Maximum Frequency Deviation: Within 300Hz and 6KHz of Audio Frequency Within 6KHz and 25KHz of Audio Frequency	$\pm 5\%$ $\pm 3\text{dB}$
Adjacent channel power	$\pm 3\text{dB}$
Conducted Emission of Transmitter, Valid Up to 12.75GHz	$\pm 4\text{dB}$
Conducted Emissions of Receivers	$\pm 3\text{dB}$
Radiated Emission of Transmitter, Valid Up to 12.75GHz	$\pm 6\text{dB}$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4.5 List of Equipment Used

● Radiated Spurious Emission& RF Conducted Test							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	100096	2026-01-13	2027-01-12
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2026-05-20	2027-05-19
☒	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2025-01-14	2027-01-13
☒	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-08-03	2026-07-23
☒	AGC-EM-E086	Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	2026-01-14	2028-01-13
☒	AGC-EM-E017	Power Amplifier	AR	75A250	18464	2025-07-18	2026-07-17

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☒	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5. ETSI EN 303 417 Requirements for Transmitter and Receiver

5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies

Test Limit

The permitted range of operating frequency range(s) for intentional emissions shall be within 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz,

Test Description

- ◆ The operating frequency range is the frequency range over which the WPT system is intentionally transmitting (all operational modes, see clause 4.2.3, Table 2).
- ◆ The operating frequency range(s) of the WPT system are determined by the lowest (f_L) and highest frequency (f_H) as occupied by the power envelope.
- ◆ The WPT system could have more than one operating frequency range. For a single frequency systems the OFR is equal to the occupied bandwidth (OBW) of the WPT system.
- ◆ For multi-frequency systems the OFR is described in Figures 2 and 3.

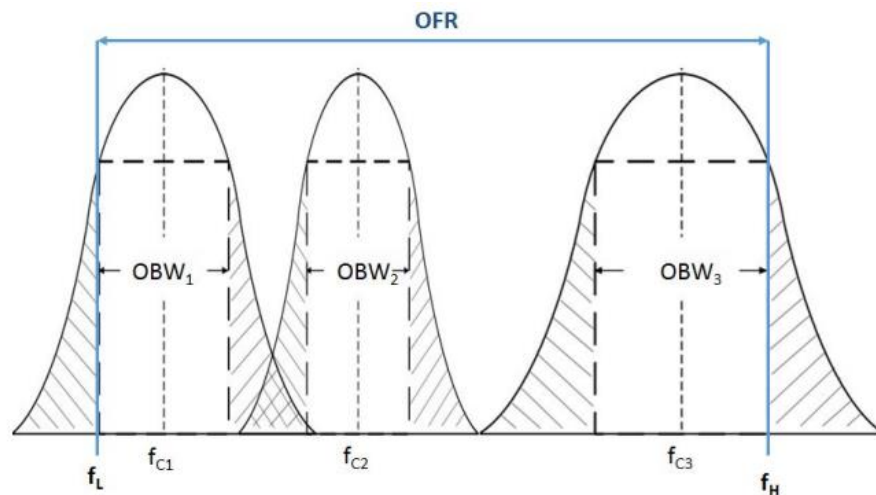


Figure 2: OFR of a multi - frequency WPT system within one frequency range of Table 2 and within one WPT system cycle time


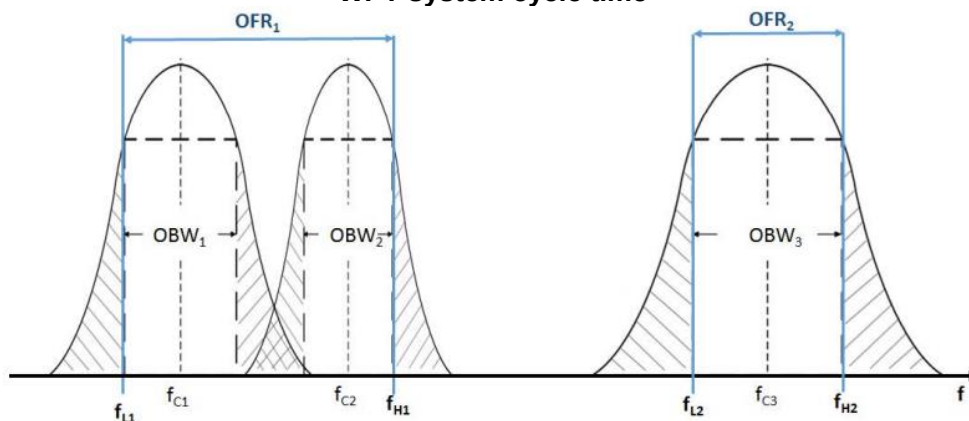


Figure 3: OFR of a multi - frequency WPT system within two frequency ranges of Table 2 and within one WPT system cycle time

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Setup

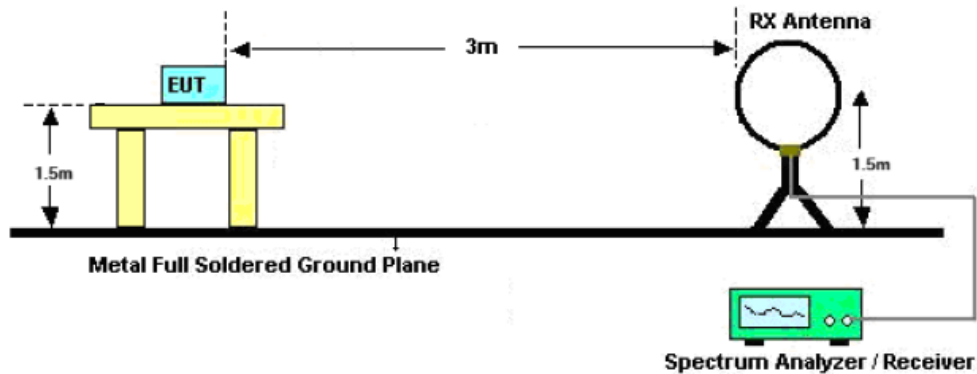

Test Procedure

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. The EUT was modulated by normal signal,
3. Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS.
The 99 % OBW function shall be used to determine the operating frequency range, f_H is the frequency of the upper marker resulting from the OFR, f_L is the frequency of the lower marker resulting from the OFR.
4. Both normal test condition and extreme test condition applied

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

☒ Test Mode: Mode 3

Frequency (kHz)	Test Conditions		99% Bandwidth (kHz)	F _L at 99% BW (kHz)	F _H at 99% BW (kHz)	Limit Band (kHz)	Result
	Temperature (°C)	Voltage (V)					
118.94	-20	9.9	0.691	118.594	119.285	100~300	Pass
		8.1	0.684	118.597	119.281		Pass
	25	9.0	0.696	118.592	119.288		Pass
	40	8.1	0.692	118.596	119.287		Pass
		9.9	0.686	118.599	119.285		Pass

☒ Test Mode: Mode 4

Frequency Range (kHz)	Test Conditions		Lower Frequency (kHz)	Upper Frequency (kHz)	Limit Band (kHz)
	Temperature (°C)	Voltage (V)			
115.9-148.2	-20	9.9	115.524	148.589	100~300
		8.1	115.528	148.589	
	25	9.0	115.524	148.593	
	40	8.1	115.530	148.590	
		9.9	115.530	148.589	
OFR	33.069kHz				
Result	Pass				

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5.2 Transmitter H-Field Requirements

Test Limit

- The H-field limits are provided in Table 3.
- They have been specified for control of any radiated emissions within the OFR originating from the WPT system (power transmission and accompanying data communication).
- The H-field limits in Table 3 are EU wide harmonised according to EC Decision 2013/752/EU [i.2]. Further information is available in CEPT/ERC/REC 70-03 [i.1].

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dBμA/m at 10 m]	Comments
$0,019 \leq f < 0,021$	72	
$0,059 \leq f < 0,061$	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
$0,079 \leq f < 0,090$	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
$0,100 \leq f < 0,119$	42	
$0,119 \leq f < 0,135$	66 descending 10 dB/dec above 0,119 MHz	See note 1
$0,135 \leq f < 0,140$	42	
$0,140 \leq f < 0,1485$	37,7	
$0,1485 \leq f < 0,30$	-5	
$6,765 \leq f < 6,795$	42	

NOTE 1: Limit is 42 dBμA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

- ◆ The H-field limit in dBμA/m at 3 m, H_{3m} , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 \text{ (F.2)}$$

Where: H_{10m} is the H-field limit in dBμA/m at 10 m distance according to the present document; and C_3 is a conversion factor in dB determined from figure F.2.


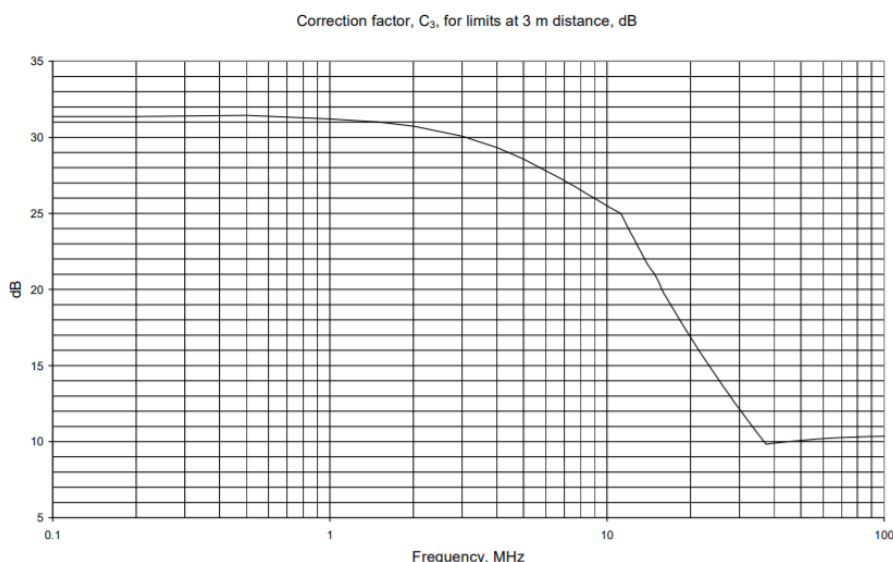


Figure H.2: Conversion factor C_3 versus frequency

- $E(\text{dB}\mu\text{V/m}) = \text{dB}\mu\text{A/m} + 51.5$;
- $\text{ERP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\lg(D) - 104.8$, D is the measurement distance;
- $\text{ERP} = 10\lg P(\text{mW})$

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Setup

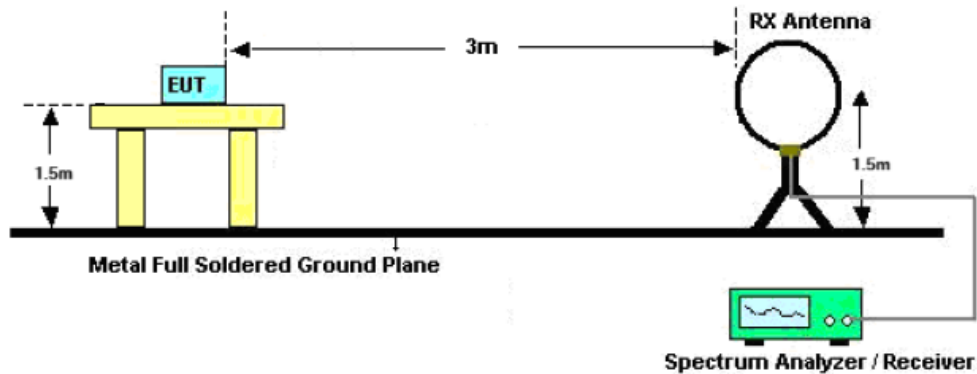

Test Procedure

1. The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The H-field is measured with a shielded loop antenna connected to a measurement receiver.
4. The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12.
5. The EUT operate with modulation under normal and extreme conditions.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

Test conditions	Test Temp.	Test Volt.	Note
TN/VN	25°C	9.0V	Worst case
TL/ VL	-20°C	9.9V	
TH/ML	40°C	9.9V	
TL/VH	-20°C	8.1V	
TH/VH	40°C	8.1V	

☒ Test Mode: Mode 3

Frequency (kHz)	Reading (dBμA/m)	Factor (dB)	Field Strength (dBμV/m@3m)	Field Strength (dBμA/m@3m)	Calculated (dBμA/m@10m)	Limit at 10m (dBμA/m@10m)	Result
118.94	39.54	27.15	66.69	15.19	-16.01	42.00	Pass

☒ Test Mode: Mode 4

Frequency (kHz)	Reading (dBμA/m)	Factor (dB)	E-Field Strength (dBμV/m@3m)	H-Field Strength (dBμA/m@3m)	Calculated (dBμA/m@10m)	Limit at 10m (dBμA/m@10m)	Result
115.9	36.9	27.15	64.05	12.55	-18.65	42.00	Pass
125.5	35.56	27.15	62.71	11.21	-19.99	65.41	Pass
148.2	36.27	27.15	63.42	11.92	-19.28	37.70	Pass

Remark:

1. Field Strength at 3m(dBμA/m) = Reading Level + Corrected Factor
2. Calculated at 10m(dBμA/m) = Field Strength at 3m(dBμA/m)-31.2dB
3. For the calculated method, please refer to Annex F at EN 300330.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5.3 Transmitter Out of Band (OOB) Emissions

Test Limit

The OOB limits are visualized in Figures 4 and 5; they are descending from the intentional limits from Table 3 at f_H/f_L with 10 dB/decade.

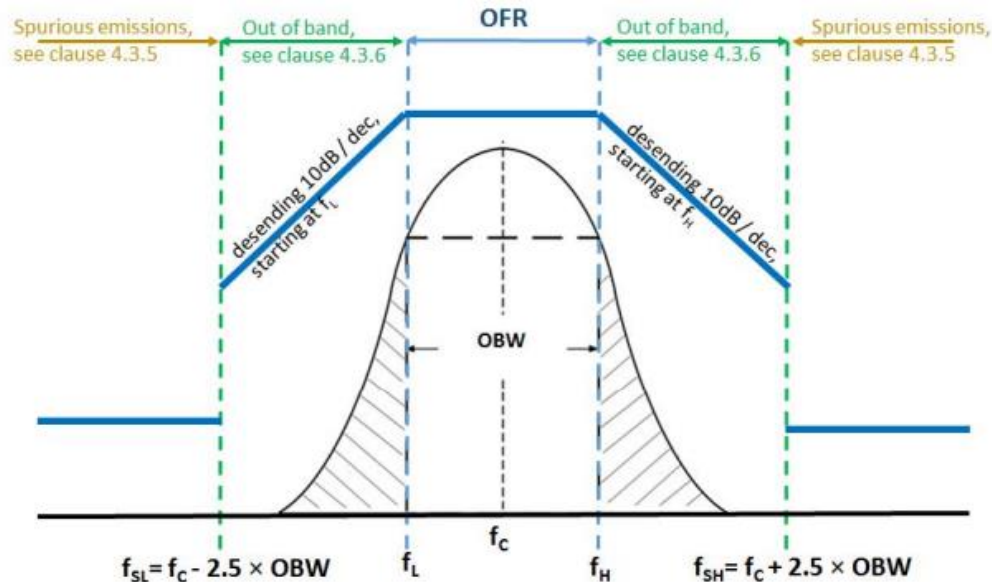


Figure 4: Out of band and spurious domain of a single frequency WPT system

The transmitter spurious emissions for a multi frequency system (within one WPT frequency range from Table 2) are to be considered in frequency ranges defined in Figure 5 ($f < f_{SL}$ and $f > f_{SH}$)


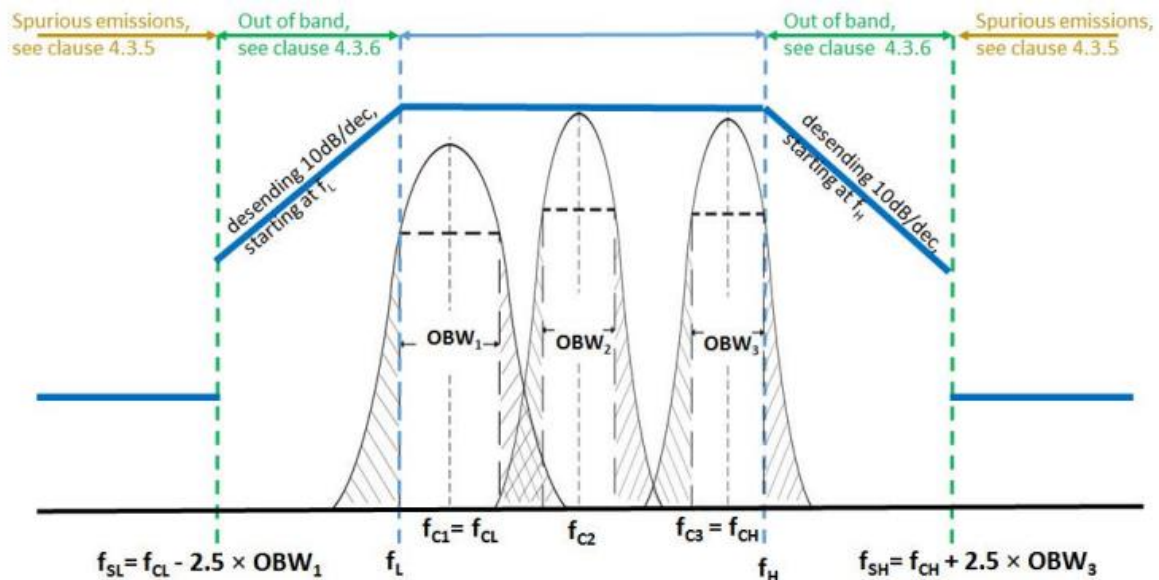


Figure 5: Out of band and spurious domain of a multi - frequency system (during one WPT system cycle time)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Setup

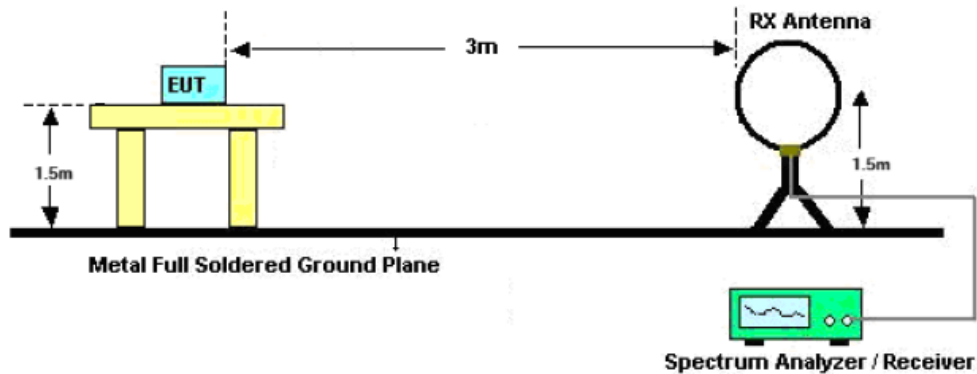

Test Procedure

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. The EUT was modulated by normal signal,
3. Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5KHz, Detector=RMS.
The 99 % OBW function shall be used to determine the operating frequency range, f_H is the frequency of the upper marker resulting from the OFR, f_L is the frequency of the lower marker resulting from the OFR.
4. Both normal test condition and extreme test condition applied

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

☒ Test Mode: Mode 3

Test Frequency (kHz)	Frequency Range (kHz)		Maximum level @10m (dBμA/m)	Limit @ 10m (dBμA/m)	Result
118.94	$f_{SL}-f_L$	117.2 - 118.592	Less than -25.17	See figure 4	Pass
	f_L	118.592	-25.17	42.00	Pass
	f_H	119.288	-25.69	42.00	Pass
	f_H-f_{SH}	119.288 - 120.68	Less than -25.69	See figure 4	Pass

☒ Test Mode: Mode 4

Test Frequency (kHz)	Frequency Range (kHz)		Maximum level @10m (dBμA/m)	Limit @ 10m (dBμA/m)	Result
115.9-148.2	$f_{SL}-f_L$	114.018 - 115.524	Less than -27.81	See figure 4	Pass
	f_L	115.524	-27.81	42.00	Pass
	f_H	148.593	-28.96	37.70	Pass
	f_H-f_{SH}	148.593 - 150.163	Less than -28.96	See figure 4	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


5.4 Transmitter Spurious Emissions (Frequency Below 30MHz)

Test Limit

Operating Mode		
Frequency Range	Distance	Maximum Field Strength Limit
$9 \text{ kHz} \leq f < 10 \text{ MHz}$	10m	27dB μ A/m at 9 kHz descending 3 dB/oct
$10 \text{ MHz} \leq f < 30 \text{ MHz}$	10m	-3.5 dB μ A/m
Stand-by Mode		
$9 \text{ kHz} \leq f < 10 \text{ MHz}$	10m	5.5dB μ A/m at 9 kHz descending 3 dB/oct
$10 \text{ MHz} \leq f < 30 \text{ MHz}$	10m	-25 dB μ A/m

Note: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.

Test Setup

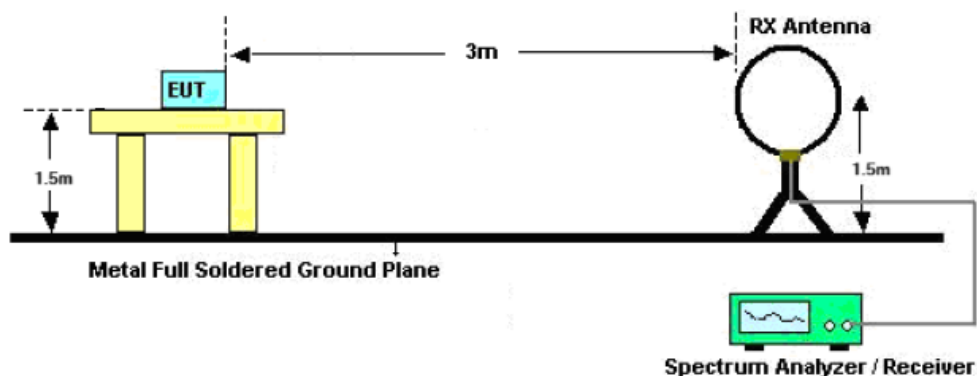

Test Procedure

- ◆ For test method of frequency range (9 kHz-30MHz)
- 1. The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3. The H-field is measured with a shielded loop antenna connected to a measurement receiver.
- 4. The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

☒ Test Mode: Mode 3 (Operating Mode: Face)

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.047	20.67	35.88	56.55	46.09	-5.41	19.78	25.19
0.271	17.35	33.13	50.48	40.02	-11.48	12.21	23.68
0.590	14.40	33.13	47.53	37.07	-14.43	8.84	23.27
2.092	14.79	25.45	40.24	29.78	-21.72	3.34	25.06
4.004	12.58	22.66	35.24	24.78	-26.72	0.52	27.24
5.294	11.07	18.56	29.63	19.17	-32.33	-0.70	31.63

☒ Test Mode: Mode 3 (Operating Mode: Side)

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.025	20.34	35.88	56.22	4.72	-26.48	22.48	48.95
0.357	17.73	33.13	50.86	-0.64	-31.84	11.02	42.86
0.567	14.47	33.13	47.60	-3.90	-35.10	9.01	44.11
1.728	14.41	25.45	39.86	-11.64	-42.84	4.17	47.00
3.961	12.76	22.66	35.42	-16.08	-47.28	0.56	47.85
6.042	10.89	18.56	29.45	-22.05	-53.25	-1.27	51.98

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

☒ Test Mode: Mode 4 (Operating Mode: Face), Lowest Channel Worst Case

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.060	20.81	35.88	56.69	46.23	-5.27	18.79	24.06
0.231	17.61	33.13	50.74	40.28	-11.22	12.91	24.13
0.403	14.83	33.13	47.96	37.50	-14.00	10.49	24.49
1.699	14.67	25.45	40.12	29.66	-21.84	4.24	26.08
2.408	12.52	22.66	35.18	24.72	-26.78	2.73	29.50
3.076	11.12	18.56	29.68	19.22	-32.28	1.66	33.95

☒ Test Mode: Mode 4 (Operating Mode: Side), Lowest Channel Worst Case

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.019	20.81	35.88	56.69	5.19	-26.01	23.86	49.88
0.301	17.78	33.13	50.91	-0.59	-31.79	11.75	43.54
0.534	14.78	33.13	47.91	-3.59	-34.79	9.27	44.06
1.750	14.40	25.45	39.85	-11.65	-42.85	4.11	46.96
3.393	12.52	22.66	35.18	-16.32	-47.52	1.24	48.76
4.951	11.34	18.56	29.90	-21.60	-52.80	-0.40	52.40

Notes:

1. Negative sign (-) in the margin column signify levels below the limit.
2. Other emissions found were at least 20 dB below the limit.
3. E-Field Strength@3m(dBμV/m) = Reading Level + Factor
4. E-Field Strength@10m(dBμV/m) = E-Field Strength@3m(dBμV/m)+10.46dB
5. H-Field Strength(dBμA/m)= E-Field Strength(dBμV/m)-51.5dB

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


5.5 Transmitter Spurious Emissions (Frequency Above 30MHz)

Spurious emissions are emissions at frequencies other than those of the carrier and sidebands associated with normal modulation.

Test Limit

Frequency Range	Operating Mode Limit	Standby Mode Limit
47 MHz to 74 MHz	4 nW	2 nW
87.5 MHz to 118 MHz	4 nW	2 nW
174 MHz to 230 MHz	4 nW	2 nW
470 MHz to 790 MHz	4 nW	2 nW
Other frequency between 30 MHz to 1000 MHz	250 nW	2 nW

Test Setup

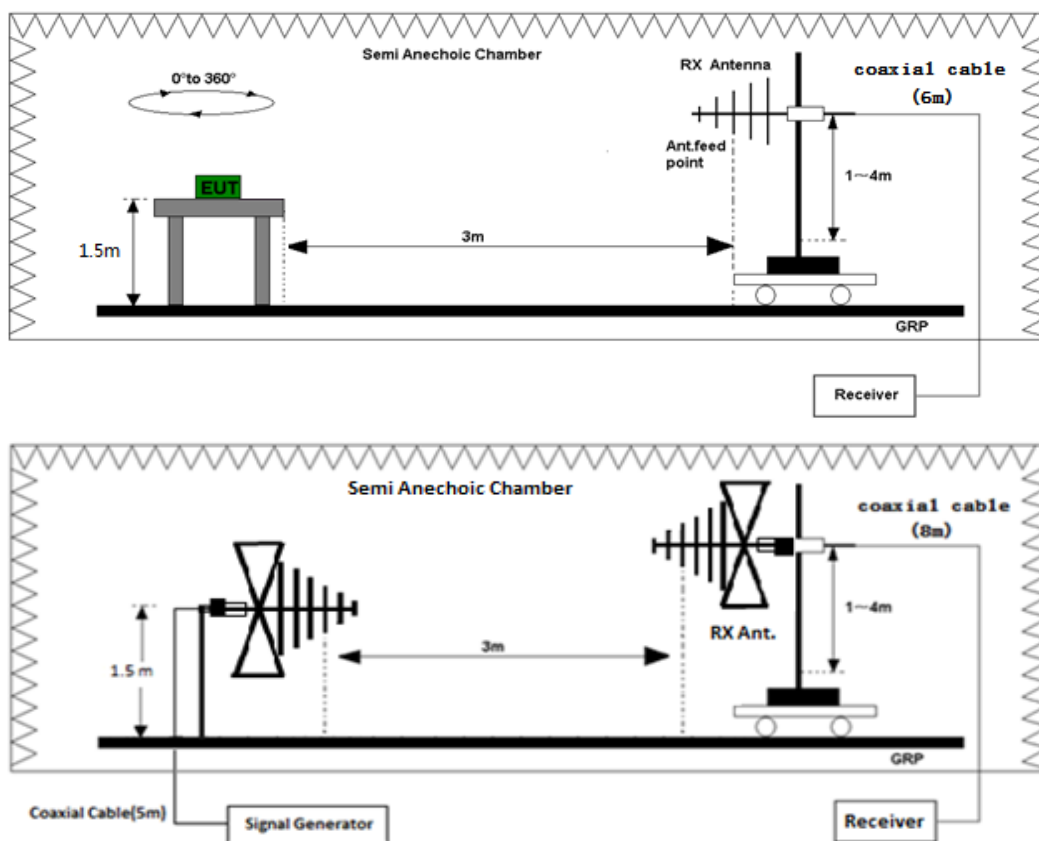

Radiated Emission Test Set-Up Frequency 30 MHz ~ 1 GHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Procedure


- ◆ For test method of frequency range (30 MHz-1000MHz)
- 1. EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.
- 2. The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.
- 3. Factor=Antenna Factor + Cable loss, Margin=Limit- Measurement Level.
- 4. The “Factor” value can be calculated automatically by software of measurement system.
- 5. All test modes had been pre-tested. The worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result


Test mode:	Operating (Mode 3)	Test Frequency:	118.94kHz
------------	--------------------	-----------------	-----------

Horizontal

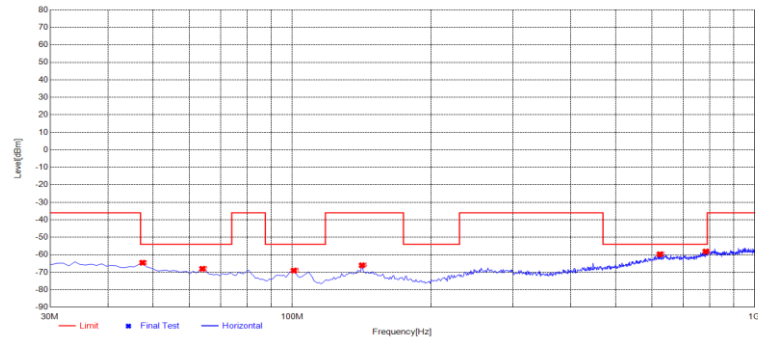

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	47.46	-92.73	-64.51	-54.00	10.51	28.22	200	Horizontal
2	63.95	-93.39	-68.00	-54.00	14.00	25.39	240	Horizontal
3	100.81	-88.83	-69.00	-54.00	15.00	19.83	80	Horizontal
4	141.55	-92.81	-65.99	-36.00	29.99	26.82	170	Horizontal
5	623.64	-93.93	-59.69	-54.00	5.69	34.24	50	Horizontal
6	783.69	-94.46	-58.12	-54.00	4.12	36.34	220	Horizontal

Vertical

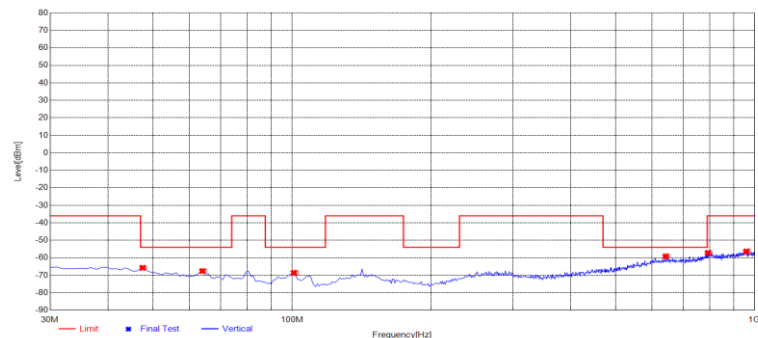

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	47.46	-93.94	-65.72	-54.00	11.72	28.22	310	Vertical
2	63.95	-92.94	-67.55	-54.00	13.55	25.39	120	Vertical
3	100.81	-88.39	-68.56	-54.00	14.56	19.83	170	Vertical
4	642.07	-93.58	-59.14	-54.00	5.14	34.44	100	Vertical
5	792.42	-93.95	-57.19	-36.00	21.19	36.76	130	Vertical
6	959.26	-94.36	-56.34	-36.00	20.34	38.02	130	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

5.6 Receiver Blocking

Test Limit

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f_c) of the WPT system (see clause 4.3.3)	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \cdot F$ (see note)
Signal level field strength at the EUT	72dB μ A/m	72dB μ A/m	82dB μ A/m
Note: $F = \text{OFR}$ see clause 4.3.3.			

Test Setup

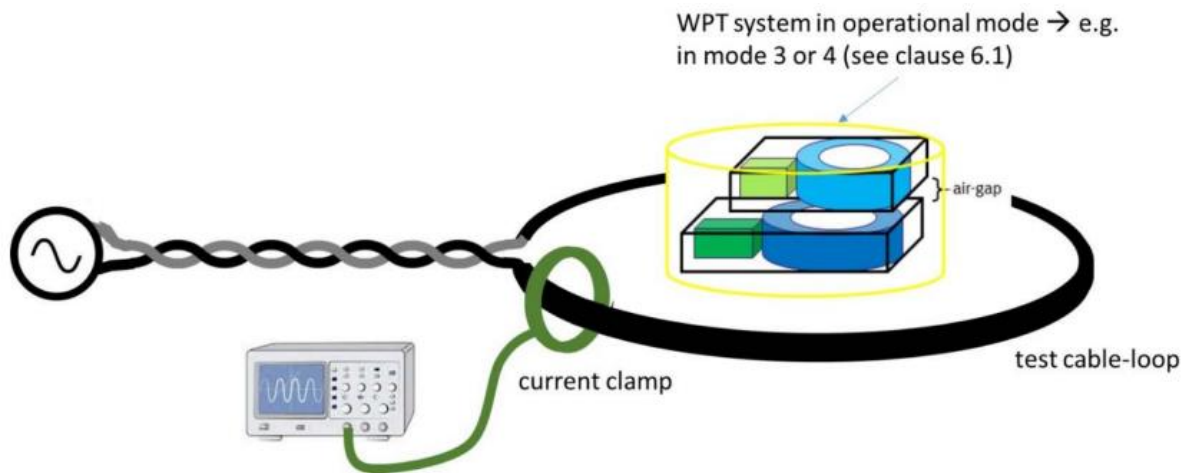


Figure 11: Schematic test set-up for the RX-blocking test

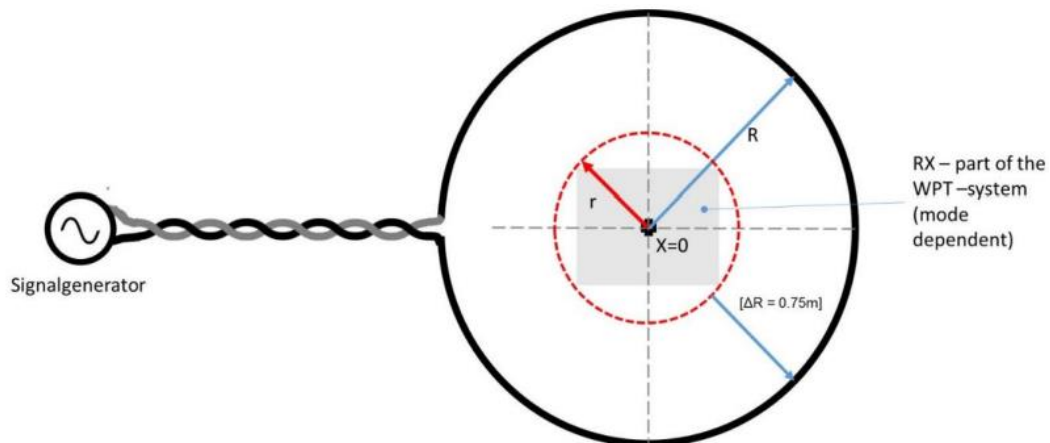


Figure 12: Schematic test set-up for the RX-blocking test

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Procedure

The fulfilment of the WPT system performance criterion in all possible operational modes (see clause 4.2.3) shall be tested in presence of the inference signals according to Table 6.

- The manufacturer shall declare in which device orientation(s) (worst case) the test shall be performed.
- The WPT system shall initially operate without interference according to its specified sensitivity (detecting an specific object in the maximum depth as declared by the manufacturer (see clause 4.2.2 on wanted performance criteria)).
- The test setup is visualized in the following Figures 11 and 12.
- The tool shall be operated as intended (e.g. some tools might require to be moved across the object, some tool can be used stationary).
- The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330 [1].
- A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.
- The EUT shall be placed to the centre of the test-loop (e.g. see Figures 11 and 12).
- The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum $\Delta R = 0,75$ m larger than the maximum dimension r of the EUT.
- (See Figure 12): $R \geq r + \Delta R$.
- The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

$$H = \frac{I}{2R}$$

Test Result

☒ Test Mode: Mode 3

Interference Type	Test Frequency (kHz)	Signal level @ EUT	Performance	Result
In-band signal	118.94	72dBuA/m	No function loss	Pass
OOB signal	118.244	72dBuA/m	No function loss	Pass
	119.636	72dBuA/m	No function loss	Pass
Remote-band signal	111.98	82dBuA/m	No function loss	Pass
	125.9	82dBuA/m	No function loss	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Appendix I: Photographs of Test Setup

Radiated Spurious Emissions Below 30MHz Test Setup



Radiated Spurious Emissions Below 1GHz Test Setup



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC05443260547AP01

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

-----End of Report-----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Radio Test Report

Report No.: AGC05443260547ER02

PRODUCT DESIGNATION : Charging and data cable
BRAND NAME : N/A
MODEL NAME : M03172
APPLICANT : MID OCEAN BRANDS B.V.
DATE OF ISSUE : Jun. 04, 2026
STANDARD(S) : ETSI EN 303 417 V1.1.1 (2017-09)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 04, 2026	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Table of Contents



1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Objective.....	6
2.3 Test Items and The Results	6
2.3 Overview of Operational Modes within a WPT System	7
2.4 Description of Test Modes	7
3. Setup of Equipment Under Test	8
3.1 Setup Configuration of EUT	8
3.2 Support Equipment.....	9
4. Test Environment	9
4.1 Address of The Test Laboratory	10
4.2 Test Facility	10
4.3 Environmental Conditions	11
4.4 Measurement Uncertainty	11
4.5 List of Equipment Used	12
5. ETSI EN 303 417 Requirements for Transmitter and Receiver	13
5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies.....	13
5.2 Transmitter H-Field Requirements.....	16
5.3 Transmitter Out of Band (OOB) Emissions	19
5.4 Transmitter Spurious Emissions (Frequency Below 30MHz)	22
5.5 Transmitter Spurious Emissions (Frequency Above 30MHz)	25
5.6 Receiver Blocking	28
Appendix I: Photographs of Test Setup	30
Appendix II: Photographs of Test EUT	31

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1. General Information

Applicant	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Factory	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Product Designation	Charging and data cable
Brand Name	N/A
Test Model	MO3172
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	May 18, 2026
Date of Test	May 18, 2026~Jun. 04, 2026
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-EU-WPT-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By		
	Thea Huang (Project Engineer)	Jun. 04, 2026
Reviewed By		
	Bibo Zhang (Reviewer)	Jun. 04, 2026
Approved By		
	Angela Li (Authorized Officer)	Jun. 04, 2026

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2. Product Information

2.1 Product Technical Description

Equipment Type	WPT System
Permitted Range of Operating Frequency	☐ WPT Band 1: 19~21kHz
	☐ WPT Band 2: 59~61kHz
	☐ WPT Band 3: 79~90kHz
	☒ WPT Band 4: 100~119kHz, 119~140kHz, 140~148.5kHz
	☒ WPT Band 4: 148.5~300kHz
	☐ WPT Band 5: 6765kHz~6795kHz
Operation Frequency	110kHz-205kHz
Hardware Version	V1.0
Software Version	V1.0
Modulation Type	ASK
Corrected Amplitude H-field@10m	-12.10dBμA/m (Max.)
Antenna Designation	Coil Antenna
Input Rating	DC 5V/2A, 9V/3A
Output Rating	Wireless output for Mobile phone: 15W Max.

Note: For more details, refer to the user's manual of the EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

2.2 Objective

Perform Radio Spectrum tests for CE Marking according to the provisions of article 3.2 of the Radio Equipment Directive (2014/53/EU) for the WPT function of the EUT.

2.3 Test Items and The Results

The tests were performed according to following standards:

ETSI EN 303 417 V1.1.1 (2017-09)	Wireless power transmission systems, using technologies other than radio frequency beam in the 19-21kHz,59-61kHz,79-90kHz,100-300 kHz, 6765-6795kHz ranges; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU
-------------------------------------	--

Test items and the results are as bellow:

No.	Test Item	Standard Require	Condition	Result
Harmonised Standard ETSI EN 303 417				
1	Permitted range of Operating Frequencies	sub-clause 4.3.2	/	Pass
2	Operating Frequency Ranges	sub-clause 4.3.3	/	Pass
3	H-field Requirements	sub-clause 4.3.4	/	Pass
4	Transmitter Spurious Emissions	sub-clause 4.3.5	/	Pass
5	Transmitter Out of Band (OOB) Emissions	sub-clause 4.3.6	/	Pass
6	WPT System Unwanted Conducted Emissions	sub-clause 4.3.7	Only for equipment which has a cable between the off board power supply and the primary coil which is longer than 3 m	N/A
7	Receiver Blocking	sub-clause 4.4.2	Only for Mode1, Mode2 and Mode3 (see Table 2)	Pass

Note: N/A means not applicable. This equipment does not meet the above test item evaluation conditions, so it is not applicable.

2.3 Overview of Operational Modes within a WPT System

EN 303 417 Clauses 4.2.3 Table 2: Overview of operational modes within a WPT system					
Operational Mode	Set-up	Function of base station	Function of mobile device	Test Scenario	Conformance Requirements
Mode 1: base station in stand-by, idle mode	Single device	TX	Not applicable	Single radiation test (TX) with the base station/charging pad. The test set-up as described in clause 6.1.2 shall be used.	- Operating frequency range (clause 4.3.3) - H-Field emission (clause 4.3.4) - TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) - Performance criteria test (RX test) (clause 4.4)
Mode 2: Communication before charging, adjustment charging mode / position	In combination	TX and RX	TX and RX	Specific test setup, declared by the manufacturer. Manufacturer shall declare the maximal distance between base station and mobile device the WPT system is able to communicate (distance D). The test setup- up shall be performed with the largest communication distance. The test set-up as described in clause 6.1.3 shall be used.	- Operating frequency range (clause 4.3.3) - H-Field emission (clause 4.3.4) - TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) - Wanted performance criteria test (RX test) (clause 4.4)
Mode 3: Communication	WPT system alignment	TX and RX	TX and RX	- Worst case alignment - Both tests can be performed within one set-up, worst-case alignment. - The test set-up as described in clause 6.1.4 shall be used.	- Operating frequency range (clause 4.3.3) - H-Field emission (clause 4.3.4) - TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) - Wanted Performance criteria test (RX test) (clause 4.4)
Mode 4: energy transmission	WPT system alignment	TX and RX	TX and RX		

2.4 Description of Test Modes

No.	Test Mode Description	Test Channel		
		Lowest	Middle	Highest
1	base station in stand-by, idle mode	/		
2	Communication before charging, adjustment charging mode / position	/	/	/
3	Communication	161.9kHz		
4	Energy transmission	114.7kHz	135.7kHz	162.1kHz

Note:


- During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- Mode 1 is only for base station function equipment and is not taken into consideration
- Mode 3 and mode 4 have been performed within one set-up, worst-case alignment.
- The communication frequency 161.9 kHz corresponds to the maximum field strength.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


3. Setup of Equipment Under Test

3.1 Setup Configuration of EUT


◆ Mode 1: Idle Mode

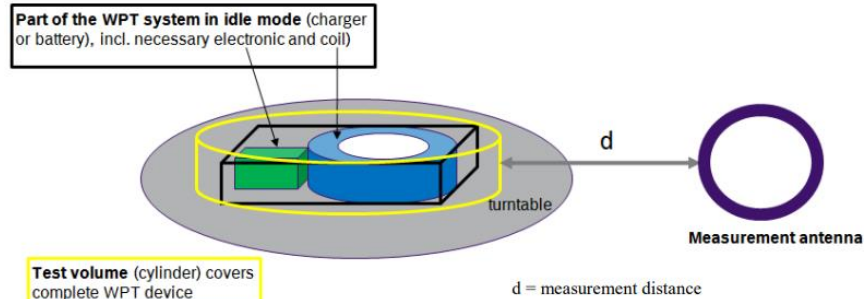

◆ Mode 2: Charging Adjustment

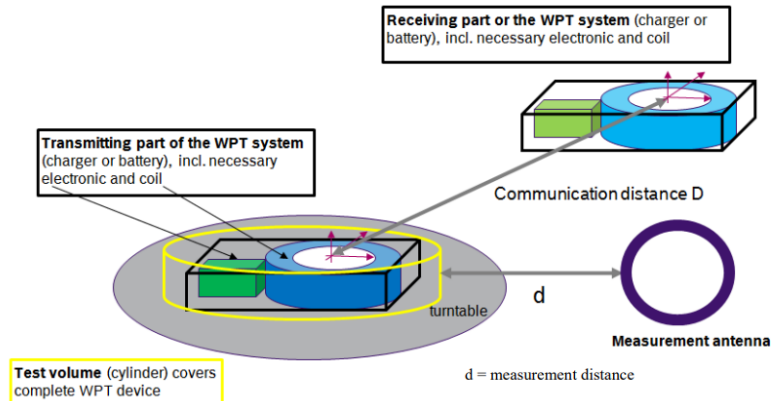

◆ Mode 3 and Mode 4: Power Transmission Arrangement

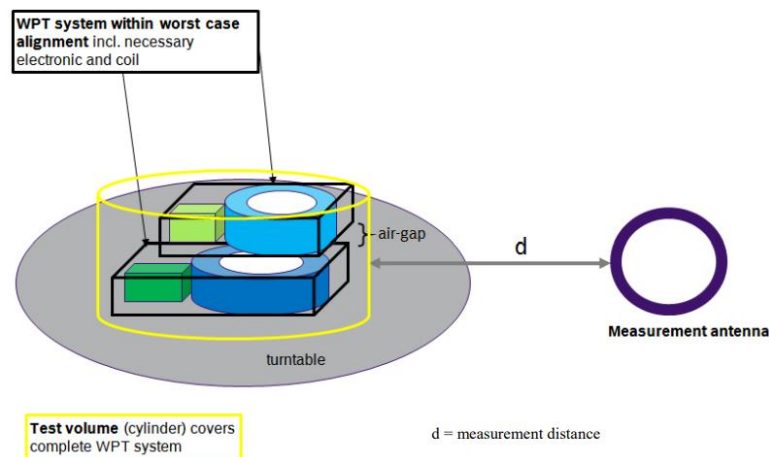

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

3.2 Support Equipment

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
Yes				
Item	Equipment	Trade Name	Model No.	Specification
1	Wireless Charging Load	YBZ	--	Support 5W,7.5W,10w,15W
2	Adapter	Apple	A2452	--

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4. Test Environment

4.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

4.3 Environmental Conditions

Normal Condition	VN=nominal Voltage	DC 9V
	TN=normal Temperature	25 °C
Extreme Condition	VL=lower Voltage	DC 8.1V
	TL=lower Temperature	-20 °C
	VH=higher Voltage	DC 9.9V
	TH=higher Temperature	40 °C

Note: The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.

4.4 Measurement Uncertainty

Test Items	Measurement Uncertainty
Frequency error	$\pm 1 \times 10^{-7}$
Transmitter power conducted	$\pm 0.75\text{dB}$
Maximum Frequency Deviation: Within 300Hz and 6KHz of Audio Frequency Within 6KHz and 25KHz of Audio Frequency	$\pm 5\%$ $\pm 3\text{dB}$
Adjacent channel power	$\pm 3\text{dB}$
Conducted Emission of Transmitter, Valid Up to 12.75GHz	$\pm 4\text{dB}$
Conducted Emissions of Receivers	$\pm 3\text{dB}$
Radiated Emission of Transmitter, Valid Up to 12.75GHz	$\pm 6\text{dB}$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4.5 List of Equipment Used

● Radiated Spurious Emission& RF Conducted Test							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	100096	2026-01-13	2027-01-12
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2026-05-20	2027-05-19
☒	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2025-01-14	2027-01-13
☒	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-08-03	2026-07-23
☒	AGC-EM-E086	Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	2026-01-14	2028-01-13
☒	AGC-EM-E017	Power Amplifier	AR	75A250	18464	2025-07-18	2026-07-17

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☒	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5. ETSI EN 303 417 Requirements for Transmitter and Receiver

5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies

Test Limit

The permitted range of operating frequency range(s) for intentional emissions shall be within 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz,

Test Description

- ◆ The operating frequency range is the frequency range over which the WPT system is intentionally transmitting (all operational modes, see clause 4.2.3, Table 2).
- ◆ The operating frequency range(s) of the WPT system are determined by the lowest (f_L) and highest frequency (f_H) as occupied by the power envelope.
- ◆ The WPT system could have more than one operating frequency range. For a single frequency systems the OFR is equal to the occupied bandwidth (OBW) of the WPT system.
- ◆ For multi-frequency systems the OFR is described in Figures 2 and 3.

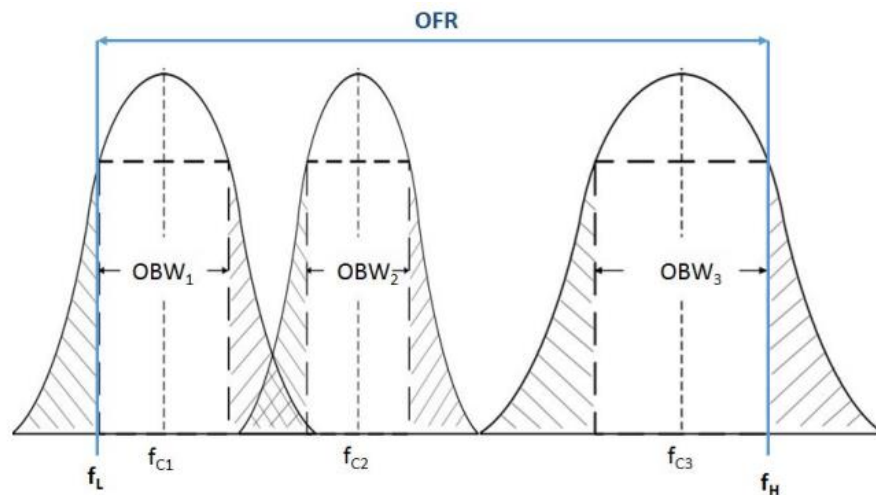


Figure 2: OFR of a multi - frequency WPT system within one frequency range of Table 2 and within one WPT system cycle time


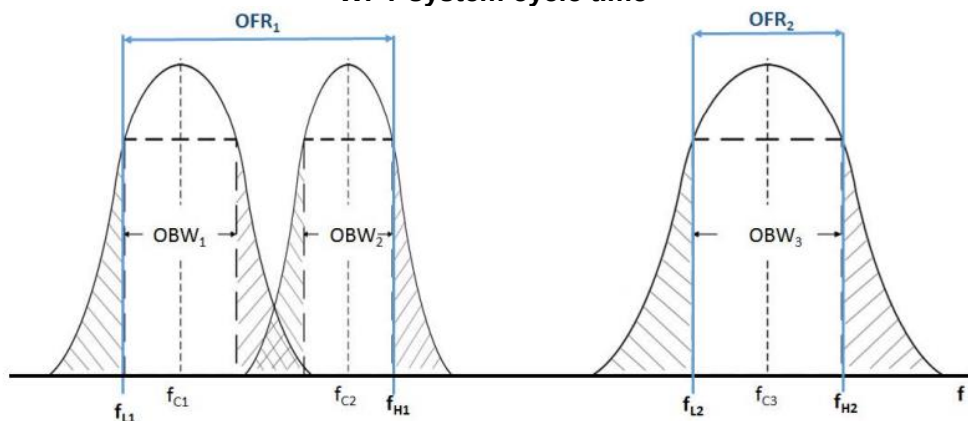


Figure 3: OFR of a multi - frequency WPT system within two frequency ranges of Table 2 and within one WPT system cycle time

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Setup

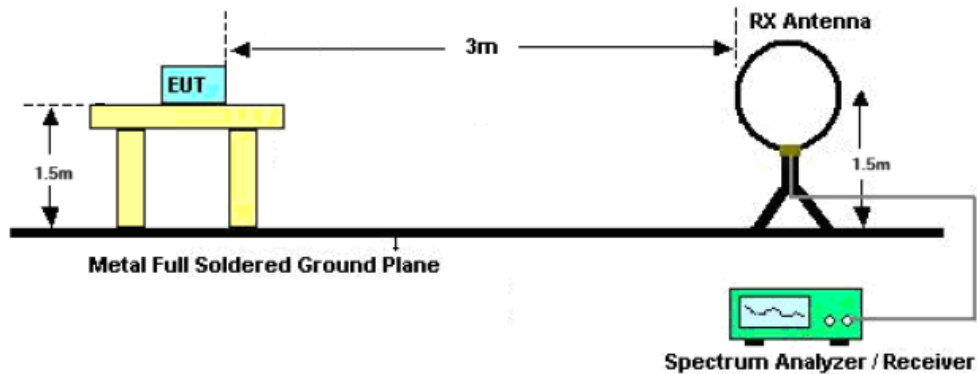

Test Procedure

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. The EUT was modulated by normal signal,
3. Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS.
The 99 % OBW function shall be used to determine the operating frequency range, f_H is the frequency of the upper marker resulting from the OFR, f_L is the frequency of the lower marker resulting from the OFR.
4. Both normal test condition and extreme test condition applied

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

☒ Test Mode: Mode 3

Frequency (kHz)	Test Conditions		99% Bandwidth (kHz)	F _L at 99% BW (kHz)	F _H at 99% BW (kHz)	Limit Band (kHz)	Result
	Temperature (°C)	Voltage (V)					
125.7	-20	9.9	0.718	125.344	126.062	100~300	Pass
		8.1	0.721	125.339	126.061		Pass
	25	9.0	0.725	125.338	126.063		Pass
	40	8.1	0.721	125.338	126.058		Pass
		9.9	0.719	125.342	126.061		Pass

☒ Test Mode: Mode 4

Frequency Range (kHz)	Test Conditions		Lower Frequency (kHz)	Upper Frequency (kHz)	Limit Band (kHz)
	Temperature (°C)	Voltage (V)			
114.7-162.1	-20	9.9	114.315	162.439	100~300
		8.1	114.320	162.437	
	25	9.0	114.315	162.441	
	40	8.1	114.315	162.439	
		9.9	114.318	162.437	
OFR	48.126kHz				
Result	Pass				

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5.2 Transmitter H-Field Requirements

Test Limit

- The H-field limits are provided in Table 3.
- They have been specified for control of any radiated emissions within the OFR originating from the WPT system (power transmission and accompanying data communication).
- The H-field limits in Table 3 are EU wide harmonised according to EC Decision 2013/752/EU [i.2]. Further information is available in CEPT/ERC/REC 70-03 [i.1].

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dBμA/m at 10 m]	Comments
$0,019 \leq f < 0,021$	72	
$0,059 \leq f < 0,061$	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
$0,079 \leq f < 0,090$	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
$0,100 \leq f < 0,119$	42	
$0,119 \leq f < 0,135$	66 descending 10 dB/dec above 0,119 MHz	See note 1
$0,135 \leq f < 0,140$	42	
$0,140 \leq f < 0,1485$	37,7	
$0,1485 \leq f < 0,30$	-5	
$6,765 \leq f < 6,795$	42	

NOTE 1: Limit is 42 dBμA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

- ◆ The H-field limit in dBμA/m at 3 m, H_{3m} , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 \text{ (F.2)}$$

Where: H_{10m} is the H-field limit in dBμA/m at 10 m distance according to the present document; and C_3 is a conversion factor in dB determined from figure F.2.


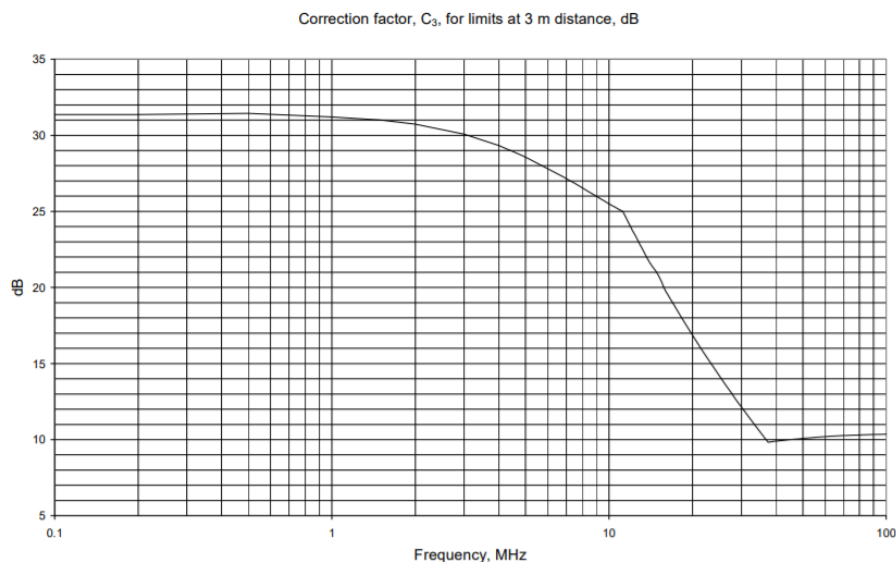


Figure H.2: Conversion factor C_3 versus frequency

- $E(\text{dB}\mu\text{V/m}) = \text{dB}\mu\text{A/m} + 51.5$;
- $\text{ERP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\lg(D) - 104.8$, D is the measurement distance;
- $\text{ERP} = 10\lg P(\text{mW})$

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Setup

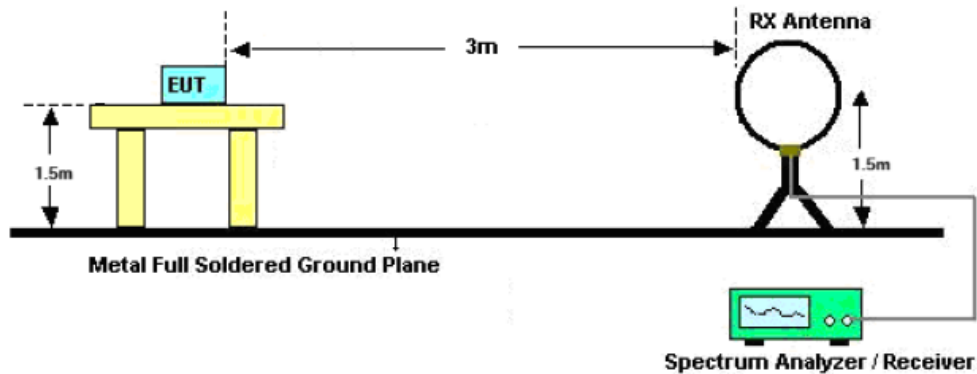

Test Procedure

1. The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The H-field is measured with a shielded loop antenna connected to a measurement receiver.
4. The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12.
5. The EUT operate with modulation under normal and extreme conditions.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

Test conditions	Test Temp.	Test Volt.	Note
TN/VN	25°C	9.0V	Worst case
TL/ VL	-20°C	8.1V	
TH/ML	-40 °C	8.1V	
TL/VH	-20°C	9.9V	
TH/VH	-40 °C	9.9V	

☒ Test Mode: Mode 3

Frequency (kHz)	Reading (dBμA/m)	Factor (dB)	Field Strength (dBμV/m@3m)	Field Strength (dBμA/m@3m)	Calculated (dBμA/m@10m)	Limit at 10m (dBμA/m@10m)	Result
125.7	40.23	27.15	67.38	15.88	-15.32	65.48	Pass

☒ Test Mode: Mode 4

Frequency (kHz)	Reading (dBμA/m)	Factor (dB)	E-Field Strength (dBμV/m@3m)	H-Field Strength (dBμA/m@3m)	Calculated (dBμA/m@10m)	Limit at 10m (dBμA/m@10m)	Result
114.7	43.45	27.15	70.6	19.1	-12.10	42.00	Pass
135.7	41.2	27.15	68.35	16.85	-14.35	42.00	Pass
162.1	39.52	27.15	66.67	15.17	-16.03	-5.00	Pass

Remark:

1. Field Strength at 3m(dBμA/m) = Reading Level + Corrected Factor
2. Calculated at 10m(dBμA/m) = Field Strength at 3m(dBμA/m)-31.2dB
3. For the calculated method, please refer to Annex F at EN 300330.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

5.3 Transmitter Out of Band (OOB) Emissions

Test Limit

The OOB limits are visualized in Figures 4 and 5; they are descending from the intentional limits from Table 3 at f_H/f_L with 10 dB/decade.

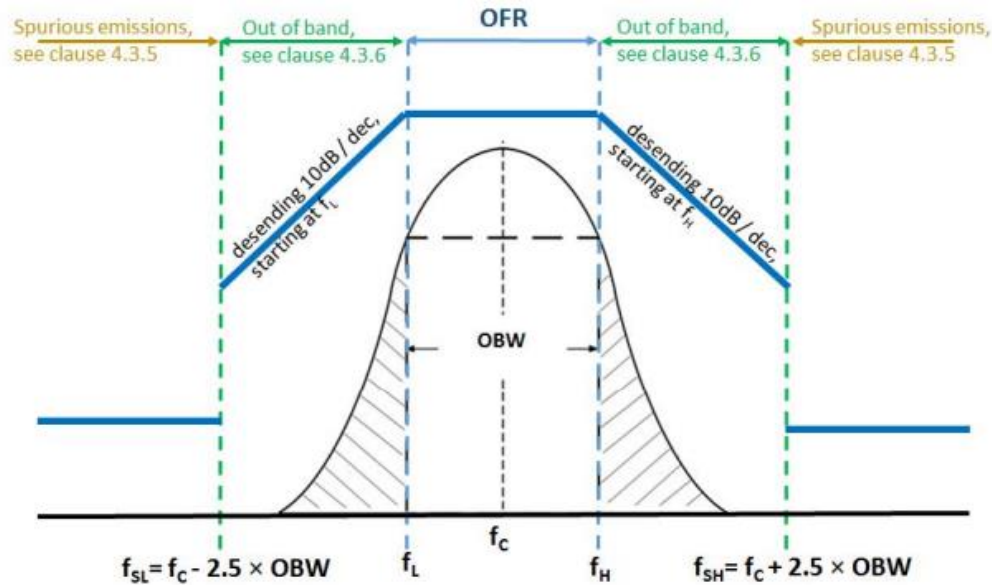


Figure 4: Out of band and spurious domain of a single frequency WPT system

The transmitter spurious emissions for a multi frequency system (within one WPT frequency range from Table 2) are to be considered in frequency ranges defined in Figure 5 ($f < f_{SL}$ and $f > f_{SH}$)


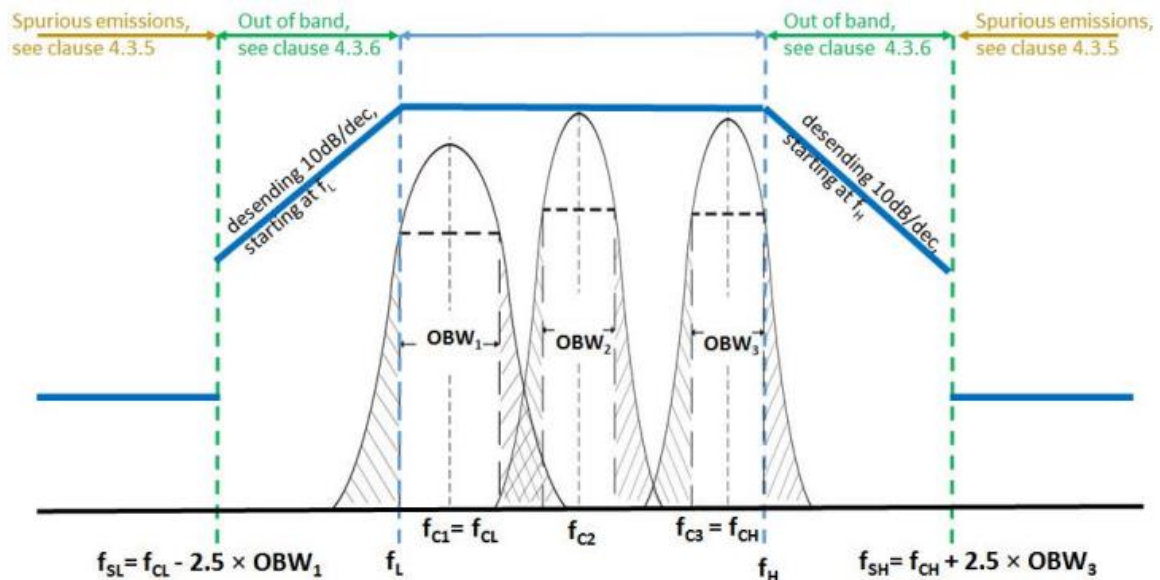


Figure 5: Out of band and spurious domain of a multi - frequency system (during one WPT system cycle time)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Setup

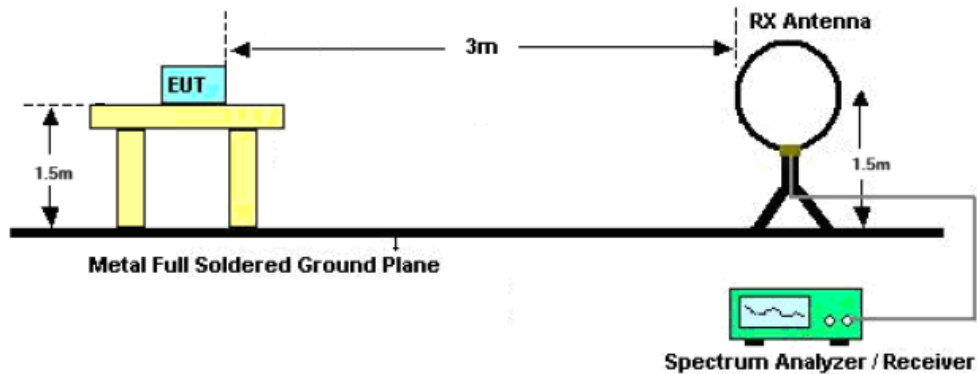

Test Procedure

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. The EUT was modulated by normal signal,
3. Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5KHz, Detector=RMS.
The 99 % OBW function shall be used to determine the operating frequency range, f_H is the frequency of the upper marker resulting from the OFR, f_L is the frequency of the lower marker resulting from the OFR.
4. Both normal test condition and extreme test condition applied

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

☒ Test Mode: Mode 3

Test Frequency (kHz)	Frequency Range (kHz)		Maximum level @10m (dBμA/m)	Limit @ 10m (dBμA/m)	Result
125.7	$f_{SL}-f_L$	123.888 - 125.338	Less than -24.48	See figure 4	Pass
	f_L	125.338	-24.48	65.48	Pass
	f_H	126.063	-25.00	65.48	Pass
	f_H-f_{SH}	126.035 - 127.373	Less than -25	See figure 4	Pass

☒ Test Mode: Mode 4

Test Frequency (kHz)	Frequency Range (kHz)		Maximum level @10m (dBμA/m)	Limit @ 10m (dBμA/m)	Result
114.7-162.1	$f_{SL}-f_L$	112.775 - 114.315	Less than -21.26	See figure 4	Pass
	f_L	114.315	-21.26	42.00	Pass
	f_H	162.441	-25.71	-5.00	Pass
	f_H-f_{SH}	162.441 - 163.805	Less than -25.71	See figure 4	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


5.4 Transmitter Spurious Emissions (Frequency Below 30MHz)

Test Limit

Operating Mode		
Frequency Range	Distance	Maximum Field Strength Limit
$9 \text{ kHz} \leq f < 10 \text{ MHz}$	10m	27dB μ A/m at 9 kHz descending 3 dB/oct
$10 \text{ MHz} \leq f < 30 \text{ MHz}$	10m	-3.5 dB μ A/m
Stand-by Mode		
$9 \text{ kHz} \leq f < 10 \text{ MHz}$	10m	5.5dB μ A/m at 9 kHz descending 3 dB/oct
$10 \text{ MHz} \leq f < 30 \text{ MHz}$	10m	-25 dB μ A/m

Note: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.

Test Setup

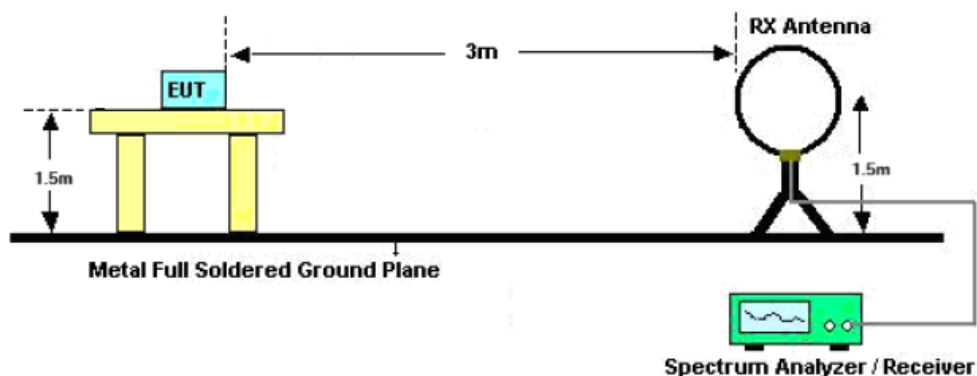

Test Procedure

- ◆ For test method of frequency range (9 kHz-30MHz)
- 1. The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3. The H-field is measured with a shielded loop antenna connected to a measurement receiver.
- 4. The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Result

☒ Test Mode: Mode 3 (Operating Mode: Face)

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.033	20.57	35.88	56.45	45.99	-5.51	21.33	26.85
0.353	17.65	33.13	50.78	40.32	-11.18	11.07	22.25
0.664	14.38	33.13	47.51	37.05	-14.45	8.32	22.77
1.940	14.35	25.45	39.80	29.34	-22.16	3.66	25.83
3.015	12.56	22.66	35.22	24.76	-26.74	1.75	28.49
6.077	10.87	18.56	29.43	18.97	-32.53	-1.29	31.24

☒ Test Mode: Mode 3 (Operating Mode: Side)

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.059	20.35	35.88	56.23	4.73	-26.47	18.86	45.33
0.306	17.69	33.13	50.82	-0.68	-31.88	11.68	43.56
0.585	14.48	33.13	47.61	-3.89	-35.09	8.87	43.96
2.040	14.70	25.45	40.15	-11.35	-42.55	3.45	46.00
3.720	12.78	22.66	35.44	-16.06	-47.26	0.84	48.10
5.080	11.11	18.56	29.67	-21.83	-53.03	-0.52	52.51

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

☒ Test Mode: Mode 4 (Operating Mode: Face), Lowest Channel Worst Case

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.021	20.62	35.88	56.50	46.04	-5.46	23.23	28.69
0.274	17.54	33.13	50.67	40.21	-11.29	12.16	23.45
0.402	14.52	33.13	47.65	37.19	-14.31	10.50	24.81
1.599	14.38	25.45	39.83	29.37	-22.13	4.50	26.64
2.540	12.42	22.66	35.08	24.62	-26.88	2.49	29.37
4.719	11.26	18.56	29.82	19.36	-32.14	-0.20	31.95

☒ Test Mode: Mode 4 (Operating Mode: Side), Lowest Channel Worst Case

Transmitter Spurious Emissions for 9kHz to 30MHz							
Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	E-Field Strength@3m (dBμV/m)	E-Field Strength@10m (dBμV/m)	Calculated@10m (dBμA/m)	Limit@10m (dBμA/m)	Margin (dB)
0.060	20.74	35.88	56.62	5.12	-26.08	18.78	44.87
0.263	17.75	33.13	50.88	-0.62	-31.82	12.34	44.16
0.511	14.43	33.13	47.56	-3.94	-35.14	9.46	44.60
1.759	14.70	25.45	40.15	-11.35	-42.55	4.09	46.64
3.498	12.79	22.66	35.45	-16.05	-47.25	1.10	48.36
4.819	10.97	18.56	29.53	-21.97	-53.17	-0.29	52.88

Notes:

1. Negative sign (-) in the margin column signify levels below the limit.
2. Other emissions found were at least 20 dB below the limit.
3. E-Field Strength@3m(dBμV/m) = Reading Level + Factor
4. E-Field Strength@10m(dBμV/m) = E-Field Strength@3m(dBμV/m)+10.46dB
5. H-Field Strength(dBμA/m)= E-Field Strength(dBμV/m)-51.5dB

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


5.5 Transmitter Spurious Emissions (Frequency Above 30MHz)

Spurious emissions are emissions at frequencies other than those of the carrier and sidebands associated with normal modulation.

Test Limit

Frequency Range	Operating Mode Limit	Standby Mode Limit
47 MHz to 74 MHz	4 nW	2 nW
87.5 MHz to 118 MHz	4 nW	2 nW
174 MHz to 230 MHz	4 nW	2 nW
470 MHz to 790 MHz	4 nW	2 nW
Other frequency between 30 MHz to 1000 MHz	250 nW	2 nW

Test Setup

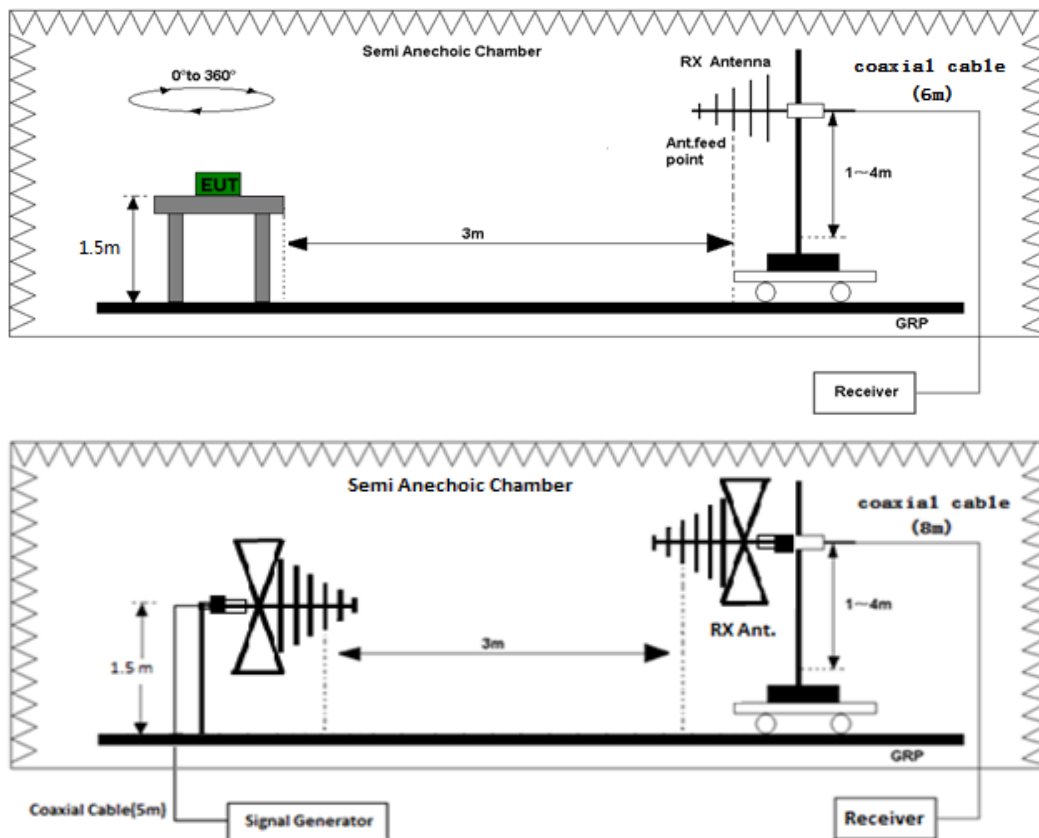

Radiated Emission Test Set-Up Frequency 30 MHz ~ 1 GHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Procedure

- ◆ For test method of frequency range (30 MHz-1000MHz)
- 1. EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.
- 2. The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.
- 3. Factor=Antenna Factor + Cable loss, Margin=Limit- Measurement Level.
- 4. The “Factor” value can be calculated automatically by software of measurement system.
- 5. All test modes had been pre-tested. The worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Result

Test mode:	Operating (Mode 3)	Test Frequency:	125.7kHz
Horizontal			

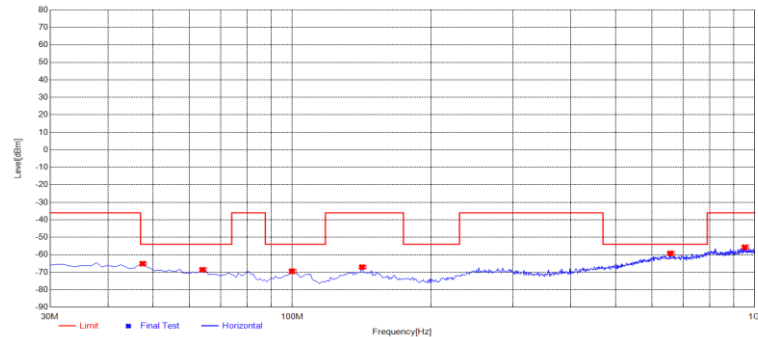

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	47.46	-93.29	-65.07	-54.00	11.07	28.22	40	Horizontal
2	63.95	-93.95	-68.56	-54.00	14.56	25.39	170	Horizontal
3	99.84	-89.28	-69.42	-54.00	15.42	19.86	120	Horizontal
4	141.55	-93.82	-67.00	-36.00	31.00	26.82	30	Horizontal
5	656.62	-93.30	-59.19	-54.00	5.19	34.11	340	Horizontal
6	951.5	-93.89	-55.71	-36.00	19.71	38.18	190	Horizontal

Vertical

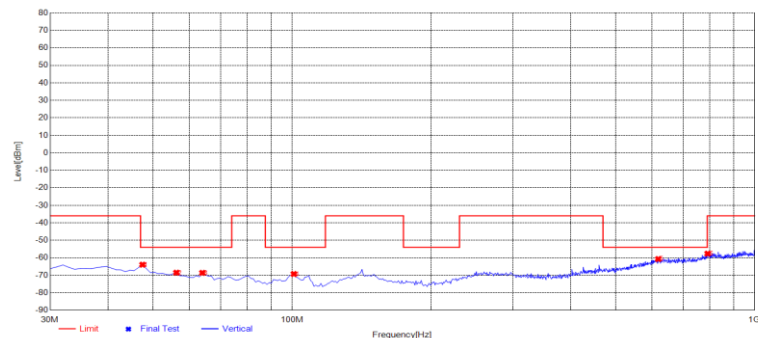

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	47.46	-92.14	-63.92	-54.00	9.92	28.22	70	Vertical
2	56.19	-95.18	-68.48	-54.00	14.48	26.70	340	Vertical
3	63.95	-93.98	-68.59	-54.00	14.59	25.39	50	Vertical
4	100.81	-89.07	-69.24	-54.00	15.24	19.83	50	Vertical
5	618.79	-94.86	-60.71	-54.00	6.71	34.15	240	Vertical
6	791.45	-94.31	-57.60	-36.00	21.60	36.71	260	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

5.6 Receiver Blocking

Test Limit

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f_c) of the WPT system (see clause 4.3.3)	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \cdot F$ (see note)
Signal level field strength at the EUT	72dB μ A/m	72dB μ A/m	82dB μ A/m
Note: $F = \text{OFR}$ see clause 4.3.3.			

Test Setup

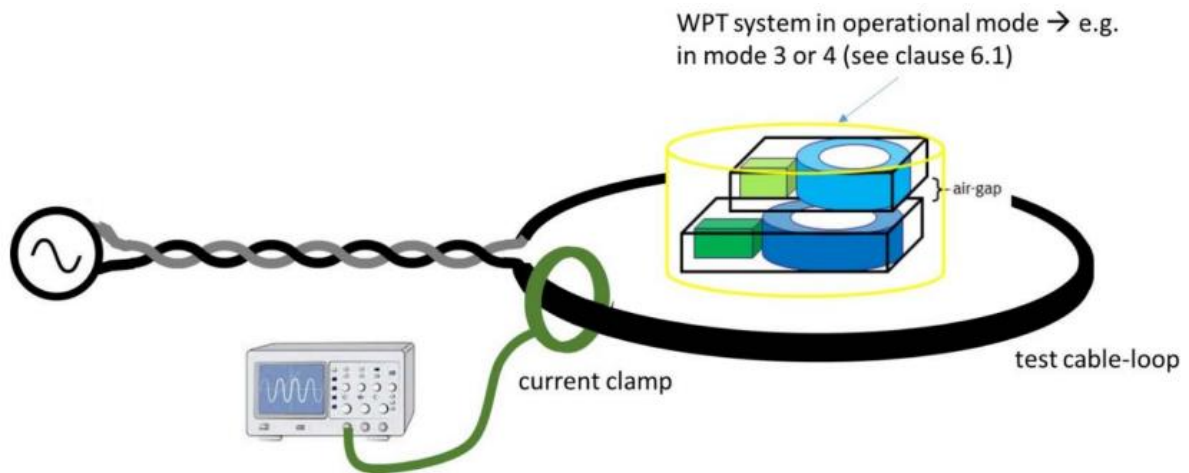


Figure 11: Schematic test set-up for the RX-blocking test

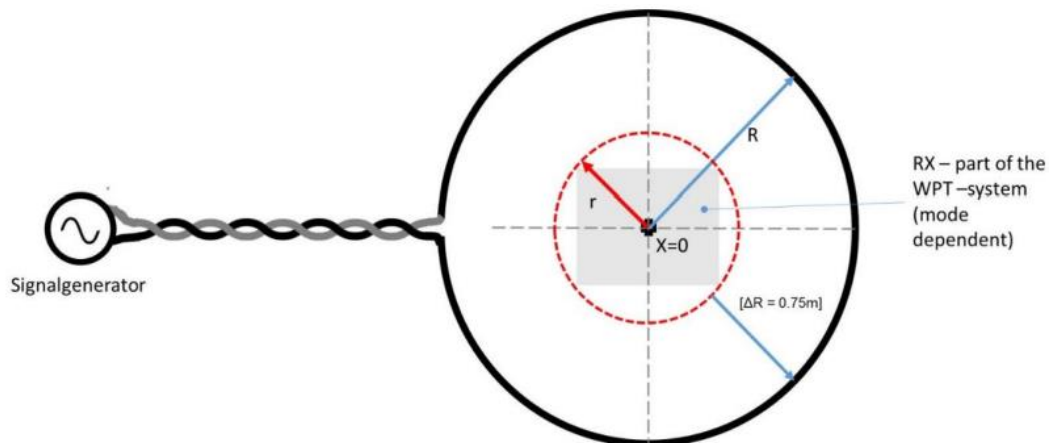


Figure 12: Schematic test set-up for the RX-blocking test

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Procedure

The fulfilment of the WPT system performance criterion in all possible operational modes (see clause 4.2.3) shall be tested in presence of the inference signals according to Table 6.

- The manufacturer shall declare in which device orientation(s) (worst case) the test shall be performed.
- The WPT system shall initially operate without interference according to its specified sensitivity (detecting an specific object in the maximum depth as declared by the manufacturer (see clause 4.2.2 on wanted performance criteria)).
- The test setup is visualized in the following Figures 11 and 12.
- The tool shall be operated as intended (e.g. some tools might require to be moved across the object, some tool can be used stationary).
- The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330 [1].
- A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.
- The EUT shall be placed to the centre of the test-loop (e.g. see Figures 11 and 12).
- The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum $\Delta R = 0,75$ m larger than the maximum dimension r of the EUT.
- (See Figure 12): $R \geq r + \Delta R$.
- The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

$$H = \frac{I}{2R}$$

Test Result

☒ Test Mode: Mode 3

Interference Type	Test Frequency (kHz)	Signal level @ EUT	Performance	Result
In-band signal	125.7	72dBuA/m	No function loss	Pass
OOB signal	124.975	72dBuA/m	No function loss	Pass
	126.425	72dBuA/m	No function loss	Pass
Remote-band signal	118.45	82dBuA/m	No function loss	Pass
	132.95	82dBuA/m	No function loss	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Appendix I: Photographs of Test Setup

Radiated Spurious Emissions Below 30MHz Test Setup



Radiated Spurious Emissions Below 1GHz Test Setup



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC05443260547AP01

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

-----End of Report-----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Health Test Report

Report No.: AGC05443260547EH01

PRODUCT DESIGNATION : Charging and data cable
BRAND NAME : N/A
MODEL NAME : M03172
APPLICANT : MID OCEAN BRANDS B.V.
DATE OF ISSUE : Jun. 04, 2026
STANDARD(S) : EN IEC 62311:2020
EN 50665:2017
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 04, 2026	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
3. Test Environment	6
3.1 Address of The Test Laboratory	6
3.2 Test Facility	6
4. EN 62479 Requirements for Exemption Assessment.....	错误!未定义书签。
4.1 Evaluation Methodology	错误!未定义书签。
4.2 Evaluation Conclusion	错误!未定义书签。
5. EN 62311 Requirements for Near Field Measurements.....	7
5.1 Evaluation Methodology	7
5.2 Measurement limits	7
5.3 Measurement Method and Arrangement	8
5.4 Test Equipment List	9
5.5 Measurement Uncertainty	9
5.6 Description of Test Modes	9
5.7 Test Result.....	10
5.8 Evaluation Conclusion	10
Appendix I: Photographs of Test Setup	11

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1. General Information

Applicant	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Factory	MID OCEAN BRANDS B.V.
Address	Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Product Designation	Charging and data cable
Brand Name	N/A
Test Model	MO3172
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	May 18, 2026
Date of Test	May 18, 2026~Jun. 04, 2026
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-EU-Health/5-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Thea Huang

Thea Huang
(Project Engineer)

Jun. 04, 2026

Reviewed By

Bibo Zhang

Bibo Zhang
(Reviewer)

Jun. 04, 2026

Approved By

Angela Li

Angela Li
(Authorized Officer)

Jun. 04, 2026

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

2. Product Information

2.1 Product Technical Description

Product Designation	Charging and data cable
Test Model	MO3172
Hardware Version	V1.0
Software Version	V1.0
Power Supply	DC 5V/9V from Adapter
Input Rating	DC 5V/2A, 9V/3A
Output Rating	Wireless output for Mobile phone: 15W Max. Wireless output for Earbud: 3W Max. Wireless output for Apple Watch: 2.5W Max.
WPT -1 Technical Parameters	
Operating Frequency	110kHz-205kHz
Modulation Type	ASK
Antenna Designation	Induction Coil Antenna
WPT -2 Technical Parameters	
Operating Frequency	110kHz-205kHz
Modulation Type	ASK
Antenna Designation	Induction Coil Antenna
WPT -3 Technical Parameters	
Operating Frequency	325kHz-330kHz
Modulation Type	ASK
Antenna Designation	Induction Coil Antenna

Note:

1. The above information was declared by the manufacturer.
2. The equipment submitted are representative production models.
3. For more details, please refer to the User's manual of the EUT.

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4. EN 62311 Requirements for Near Field Measurements

4.1 Evaluation Methodology

- This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.
- This generic standard applies to electronic and electrical apparatus for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.
- The frequency range covered is 0 Hz to 300 GHz.
- The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields and induced and contact current.

Note: This standard is intended to cover both intentional and non-intentional radiators. If the equipment complies with the requirements in another relevant standard, e.g. EN 62479 covering low power equipment, then the requirements of this standard (IEC 62311) are considered to be met and the application of this standard to that equipment is not necessary.

4.2 Measurement limits

According to EN IEC 62311:2020, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0Hz–300GHz).

Annex F Measurement of E and H field

A commonly used probe size is 100 cm², also the contribution of the three axes X, Y and Z can be evaluated separately.

Frequency Range	E-field Strength (V/m)	H-Field Strength (A/m)	B-Field (uT)	Equivalent plane Wave Power Density (W/m ²)
0-1 Hz	--	$3.2 \cdot 10^4$	$4 \cdot 10^4$	--
1-8 Hz	10000	$3.2 \cdot 10^4 / f^2$	$4 \cdot 10^4 / f^2$	--
8-25 Hz	10000	$4000 / f$	$5000 / f$	--
0.025-0.8 kHz	$250 / f$	$4 / f$	$5 / f$	--
0.8-3 kHz	$250 / f$	5	6.25	--
3-150 kHz	87	5	6.25	--
0.15-1 MHz	87	$0.73 / f$	$0.92 / f$	--
1-10 MHz	$87 / f^{1/2}$	$0.73 / f$	$0.92 / f$	--
10-400 MHz	28	0.073	0.092	2
400-2000 MHz	$1.375 f^{1/2}$	$0.0037 f^{1/2}$	$0.0046 f^{1/2}$	$f / 200$
2-300 GHz	61	0.16	0.20	10

*Note:

1. f as indicated in the frequency range column.
2. Provided that basic restrictions are met and adverse indirect effects can be excluded, field strength values can be exceeded.
3. For frequencies between 100 kHz and 10 GHz, S, E₂, H₂ and B₂ are to be averaged over any 6-min period.
4. For peak values at frequencies up to 100 kHz see Table 4, note 3.
5. For peak values at frequencies exceeding 100 kHz see Figs.1 and 2. Between 100 KHz and 10MHz, peak

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

values for the field strengths are obtained by interpolation from the 1.5-fold peak at 100 kHz to the 32-fold peak at 10 MHz. For frequencies exceeding 10 MHz it is suggested that the peak equivalent plane wave power density, as averaged over the pulse width, does not exceed 1,000 times the S restrictions, or that the field strength does not exceed 32 times the field strength exposure levels given in the table.


6. For frequencies exceeding 10 GHz, S, E₂, H₂ and B₂ are to be averaged over any 68/f^{1.05} –min period (f in GHz).
7. No E-field value is provided for frequencies < 1 Hz, which are effectively static electric fields, Electric shock from low impedance sources is prevented by established electrical safety procedures for such equipment

4.3 Measurement Method and Arrangement


● Measurement of E and H field

A commonly used probe size is 100 cm², also the contribution of the three axes X, Y and Z can be evaluated separately

Mobile:

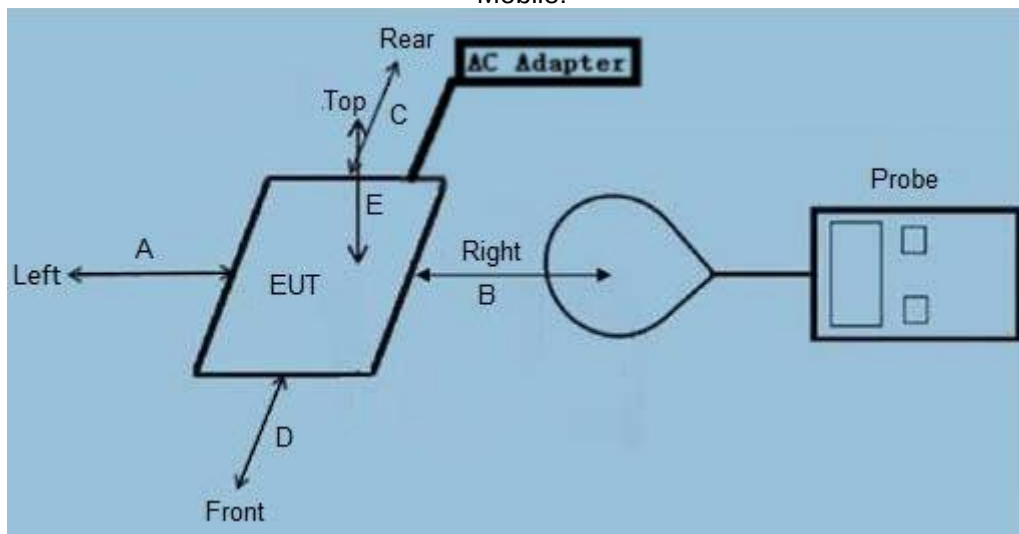

Portable:

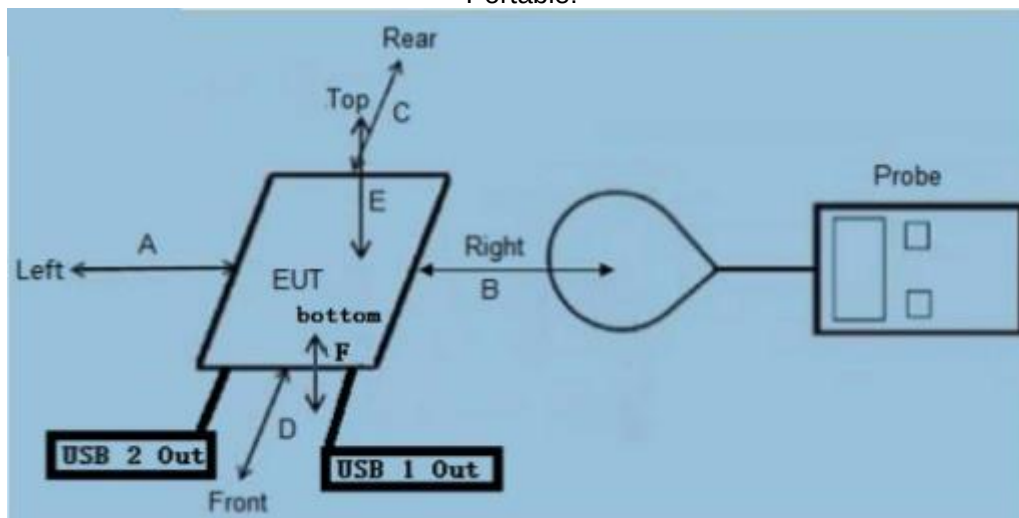

Note:

1. Position D: Front of EUT; Position A: Left of EUT; Position C: Back/Rear of EUT; Position B: Right of EUT; Position E: Top of EUT, Position F: Bottom of EUT
2. The peripheral load in the diagram is for reference only. It may not match the actual USB peripherals.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4.4 Test Equipment List

Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-RF-011	Broadband Field Meter	WAVECONTROL	SMP2	J-0004	2025-06-09	2026-06-08
☒	AGC-RF-012	Probe FHP	WAVECONTROL	WP400	J-0015	2025-06-09	2026-06-08

4.5 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
E-Field Strength (0.003-0.4MHz)	$\pm 1.5\text{dB}$
E-Field Strength (0.4-10MHz)	$\pm 1.3\text{dB}$
H-Field Strength (0.003-0.4MHz)	$\pm 1.3\text{dB}$
H-Field Strength (0.4-10MHz)	$\pm 1.2\text{dB}$

4.6 Description of Test Modes

No.	Test Mode Description	Exposure Conditions
1	DUT+ Wireless Load (Full Load) + AC/DC Adapter	Mobile
2	DUT+ Wireless Load (Half Load) + AC/DC Adapter	Mobile
3	DUT+ Wireless Load (Null Load mode) + AC/DC Adapter	Mobile

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

4.7 Test Result

WPT -1:

Frequency	Maximum Radiated H-Field at 20cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
0.1619	position E	0.025	5	Pass
	position A	0.034		
	position B	0.048		
	position C	0.019		
	position D	0.024		

Since Radiated H-Field at worse case is 0.048A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restrisction specified in EC Council Recommendation (1999/519/EC)

WPT -2:

Frequency	Maximum Radiated H-Field at 20cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
0.14823	position E	0.056	5	Pass
	position A	0.041		
	position B	0.035		
	position C	0.022		
	position D	0.036		

Since Radiated H-Field at worse case is 0.056A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restrisction specified in EC Council Recommendation (1999/519/EC)

WPT -3:

Frequency	Maximum Radiated H-Field at 20cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
0.326	position E	0.046	2.2	Pass
	position A	0.052		
	position B	0.042		
	position C	0.036		
	position D	0.048		

Since Radiated H-Field at worse case is 0.052A/m which cannot exceed the exempt condition,2.2A/m. It is deemed to full fit the requirement of RF exposure basic restrisction specified in EC Council Recommendation (1999/519/EC).


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5.8 Evaluation Conclusion

Remark: EUT meets the basic requirements in the standard.

Appendix I: Photographs of Test Setup

Measure Position E

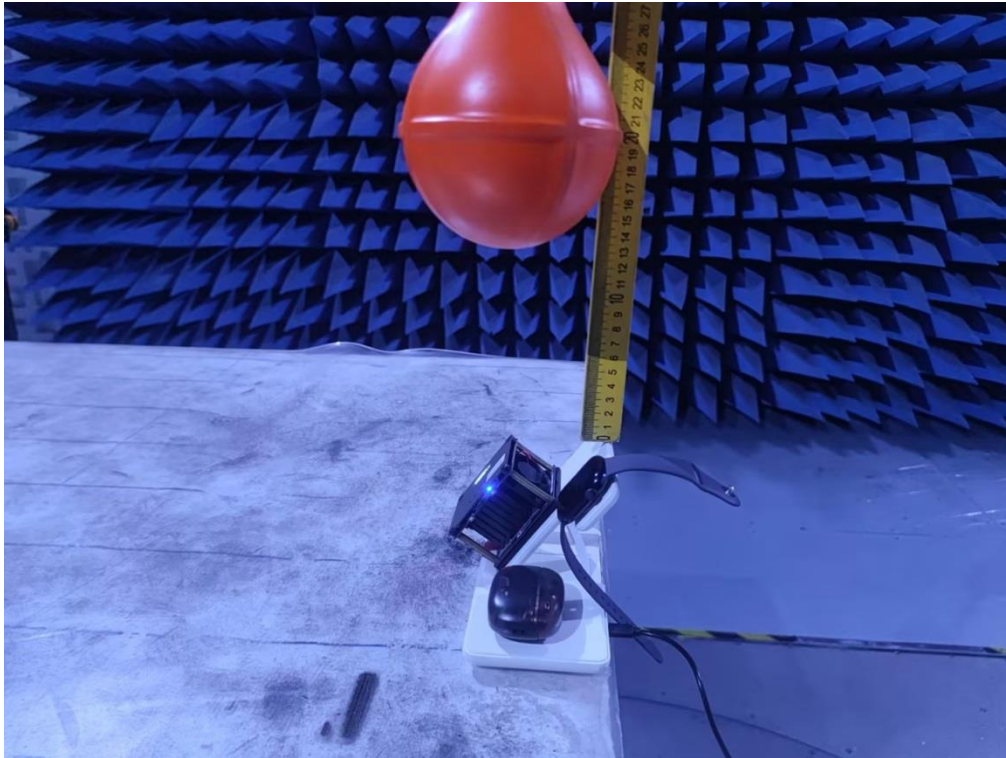


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Measure Position C

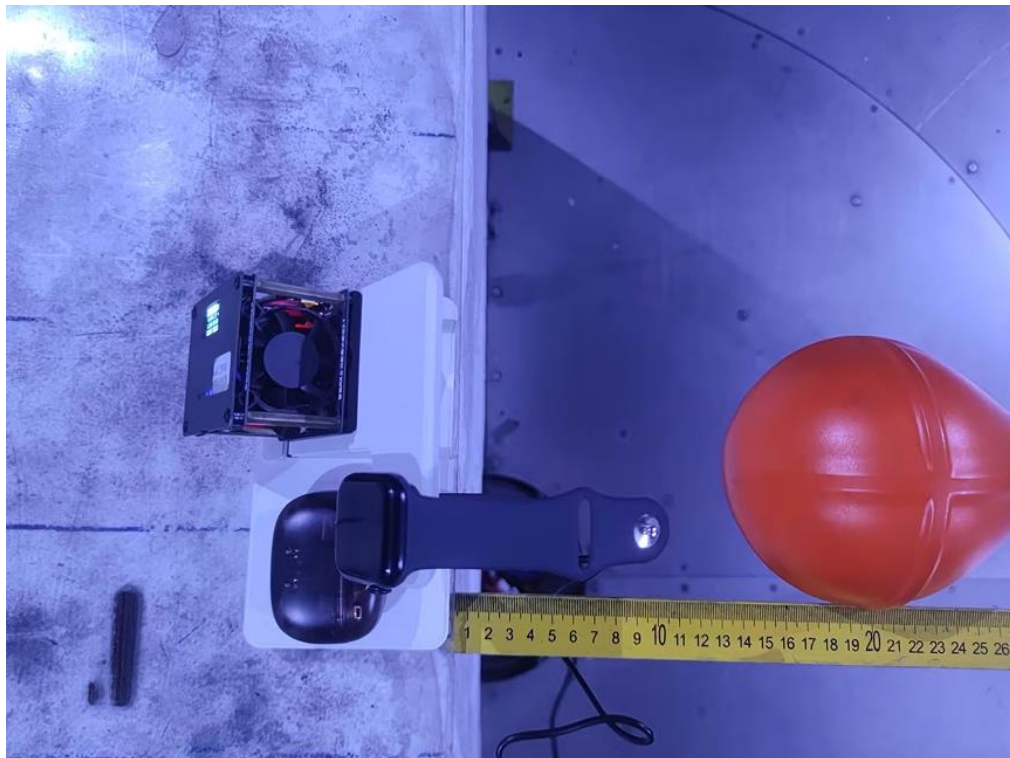

Measure Position B

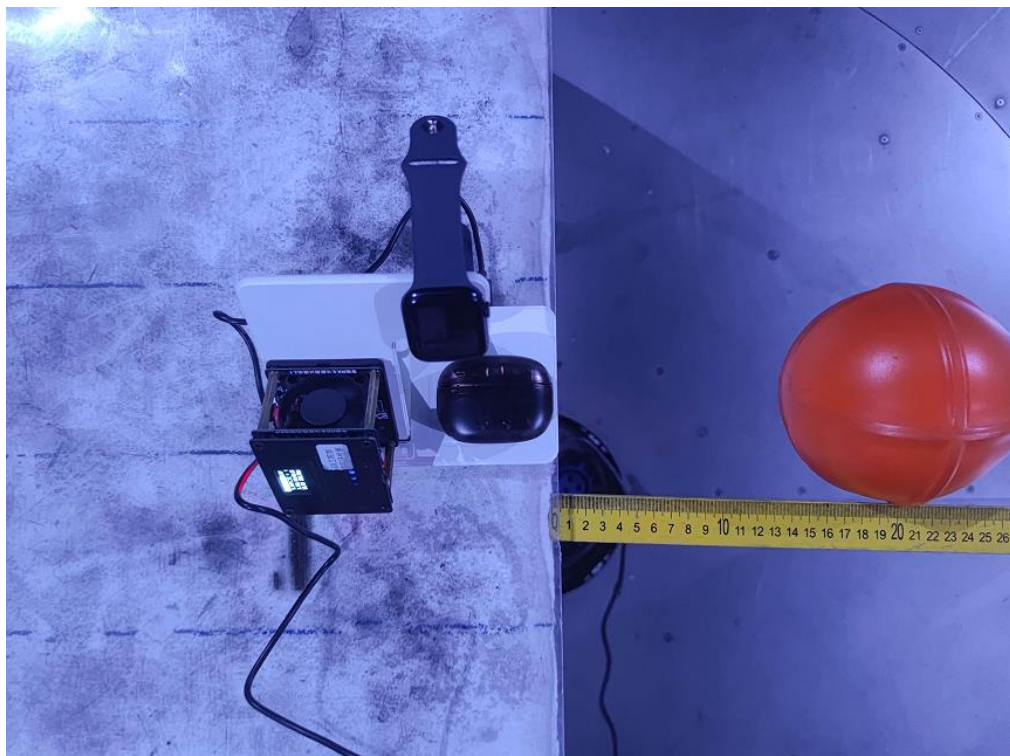

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Measure Position D



Measure Position A



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

-----End of Report-----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>