



中国认可
国际互认
检测
TESTING
CNAS L4062



TEST REPORT

Reference No...... : WTF26X04086844Y
Applicant..... : Mid Ocean Brands B.V.
Address..... : Unit 711?716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer : 120327
Address..... : ---
Product Name..... : ANC foldable headphone
Model No..... : MO3141
Test specification..... : EN 50332-2:2013: Sound system equipment: Headphones and earphones associated with personal music players
- Maximum sound pressure level measurement methodology
Part 2: Matching of sets with headphones if either or both are offered separately, or are offered as one package equipment but with standardized connectors between the two allowing to combine components of different manufacturers or different design
Date of Receipt sample..... : 2026-04-02
Date of Test..... : 2026-04-02 to 2026-04-07
Date of Issue..... : 2026-04-07
Test Report Form No..... : WTX_EN50332_2_2013A
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel :+86-755-33663308 Fax:+86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Kevin Ye

Kevin Ye / Project Engineer

Approved by:

Harvid Wei

Harvid Wei / Manager



Test item description: ANC foldable headphone	
Trademark: ---	
Model and/or type reference: MO3141	
Rating(s).....: --	
Test Laboratory	Waltek Testing Group (Shenzhen) Co., Ltd.
Address	1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China
General product information: The sample(s) tested complies with the requirements of EN 50332-2: 2013.	
Model Differences: Main test models: MO3141	
Summary of testing: All tests had been assessed for safety with respect to the above test specifications and found to comply with the requirements of the standards.	

WALTEK

**Test case verdicts**

Test case does not apply to the test object : N(N/A)

Test item does meet the requirement : P(Pass)

Test item does not meet the requirement : F(Fail)

General remarks

The test result presented in this report relate only to the object(s) tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

The report would be invalid without specific stamp for test institute or the authority.

The report would be invalid without the signatures of reporter and reviewer.

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Remark:

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes☒ No

If Yes, list the related test items and lab information:

Test items:

Lab information:

WALTEK



EN 50332-2: 2013

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

4	Basic conditions for specifications and measurements (For basic conditions on measurements of the maximum sound pressure level, reference is made to EN 50332-1.)		P
4.1	General description		P
	The sound pressure level produced by headphones or earphones can be measured by subjective methods or by objective methods.		P
	The reference method for evaluating the sound pressured level emitted by earphones is a psycho acoustic method known as "equal loudness" (EN60268-7)		P
4.2	Measuring principle		P
	The standard is based on the use of a Head and Torso Simulator (HATS) in accordance with IEC 60318-7		P
	The sound pressure level measured by the ear simulator microphone represents the pressure found at eardrum level and differs from that of the free field pressure by the HATS transfer function		P

5	Player characteristics and methods of measurement		N
5.1	Maximum output voltage V_m		N
5.2	Method of measurement and conditions		N
5.2.1	Input signal		N
	Actual musical signals are continuously fluctuating in both amplitude and spectral contents and thus cannot be used as test signals		N
	The test signal must therefore be a stationary wide-band signal, the spectral content of which is representative of the musical signals.		N
	The test signal used to determine the maximum sound pressure level of headphones shall be programme simulation noise, as defined in HD 483.1 S2.		N
5.2.2	Operating conditions		N
	- By a established power supply		N
	- tolerance of nominal supply voltage		N
	- All controls are adjusted to maximum sound pressure level		N



EN 50332-2: 2013			
Clause	Requirement – Test	Result - Remark	Verdict
	- load of player output		N
5.2.3	Method of measurement for analogue audio outputs		N
	The measuring equipment shall conform to: - EN 61672-1, class 1 for (sound level meters); - EN61260, class 1 for (1/3 octave analysers).		N
	The maximum output voltage V_m shall be defined as unweighted r.m.s. voltage at the load, using an averaging time of 30 s or more.		N
5.2.4	Method of measurement for digital audio outputs		N
	The maximum output level L_m shall be defined as average of digital signal, using an averaging time of 30 s or more.		N
	The digital input test signal is defined in EN 50332-1 as -10 dBFS.		N

6	Headphone/Earphone characteristics and methods of measurement		P
6.1	Measuring equipment		P
	The measuring equipment shall be in accordance with EN 61672-1 when connected with a HATS microphone.		P
6.2	Simulated programme signal characteristic voltage		P
6.3	Method of measurement arrangement and conditions		P
6.3.1	Input signal		P
	- is program simulation noise as defined in HD 483.1 S2		P
	- according part 1, subclause 5.1		P
6.3.2	Source impedance of analogue input devices		P
	- output impedance of the test signal source		P
6.3.3	Acoustical measurement method		P
6.3.4	Headphones / earphones fit		P
	- Position correctly for measuring maximum sound pressure		P
	- the manufacturer's instruction for correct use		P
6.3.5	Measurement and evaluation		P



EN 50332-2: 2013			
Clause	Requirement – Test	Result - Remark	Verdict
	- The simulated programme signal characteristic voltage of analogue headphone input is the input signal voltage when the sound pressure level reaches 94 dB SPL A-weighted.	See table 6.3.5 Measuring result (WBCV)	P
	- The $L_{Aeq,T}$ of a digital headphone/earphone input is the acoustic output sound pressure level measured in the test protocol of EN 50332-1:2013.	See table 6.3.5 Measuring result (SPL)	P

WALTEK

**Table 2 – Classification of the characteristics to be specified**

Subclause	Characteristics	Products
5.1	Maximum output voltage	Player
6.3.5	Wide band characteristic voltage (WBCV)	Headphones
6.3.5	Sound pressure level (SPL)	Headphones

Measuring result:

5.1	Measuring result		N
	SPL (dB)	V _{max} (mV)	Criterion request(mV)
Left side	--	--	--
Right side	--	--	--
Note: N/A.			

6.3.5	Measuring result (WBCV) (AUX mode)			P
	SPL (dB)	V _{WBCV} (mV)	Criterion request(mV)	
Left side	94	281.228	≥ 75	
Right side	94	326.228	≥ 75	
Note: N/A.				

6.3.5	Measuring result (SPL) (Bluetooth mode)				P
	Measurement No.1	Measurement No.2	Measurement No.3	Measurement No.4	Measurement No.5
Left side	85.95	85.89	85.98	85.98	85.90
Right side	84.76	84.71	84.76	84.76	84.72
Average	Left side: 85.94		Right side: 84.74		
Note: The limit request as above refers to EN 62368-1.					



Photo Documentation
Model: MO3141



Photo 1



Photo 2



Photo Documentation

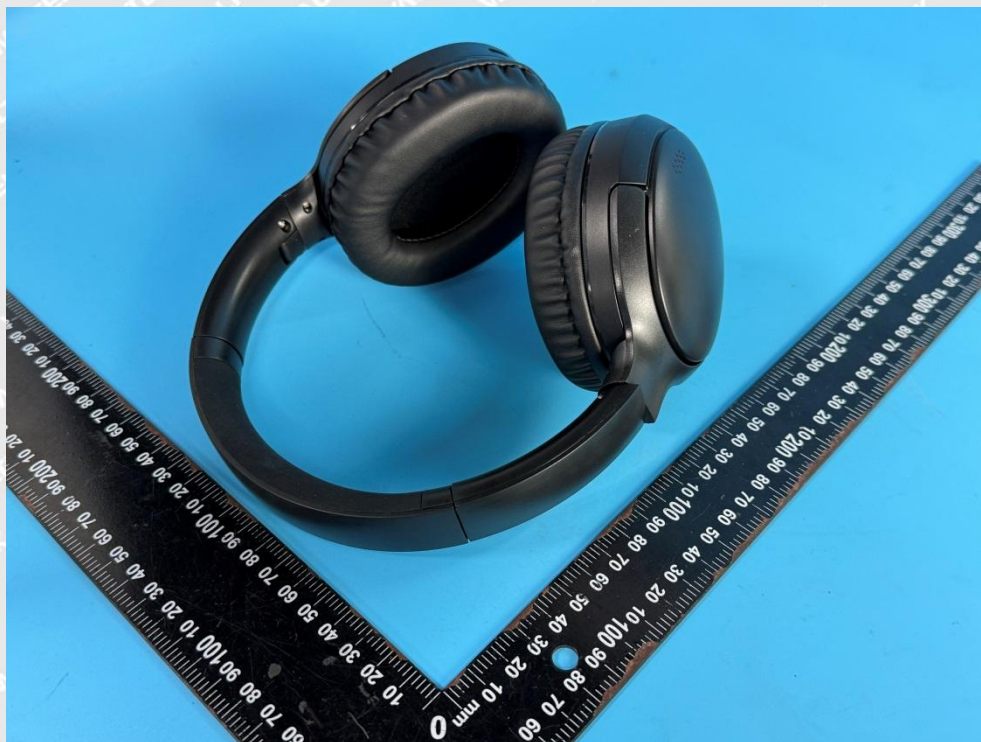


Photo 3



Photo 4



Photo Documentation

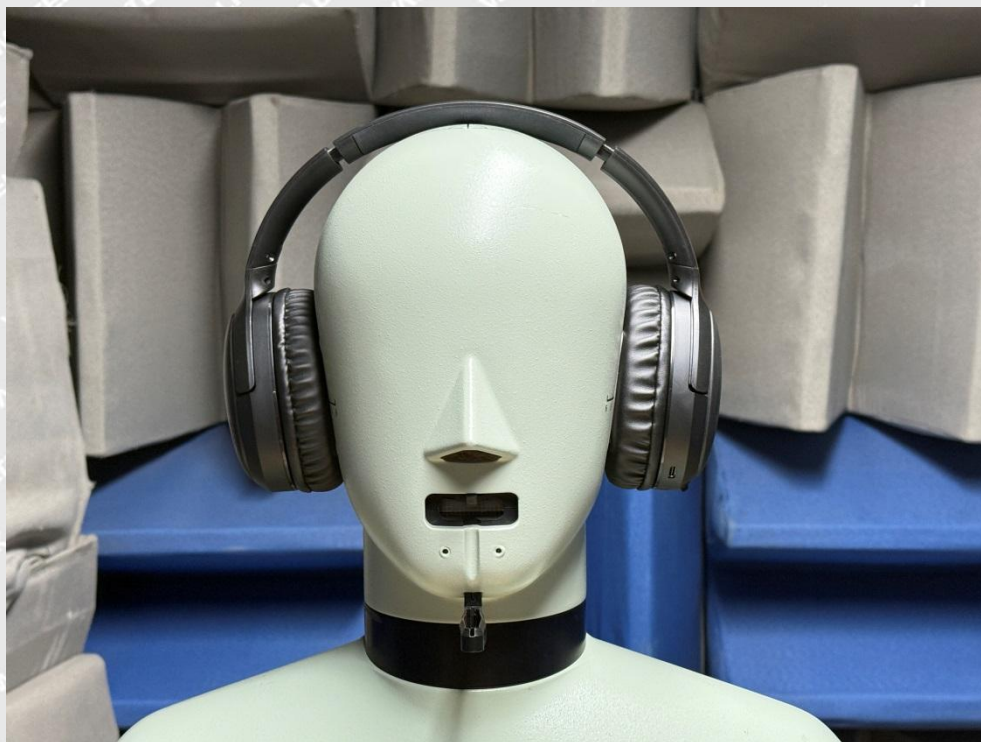


Photo 5

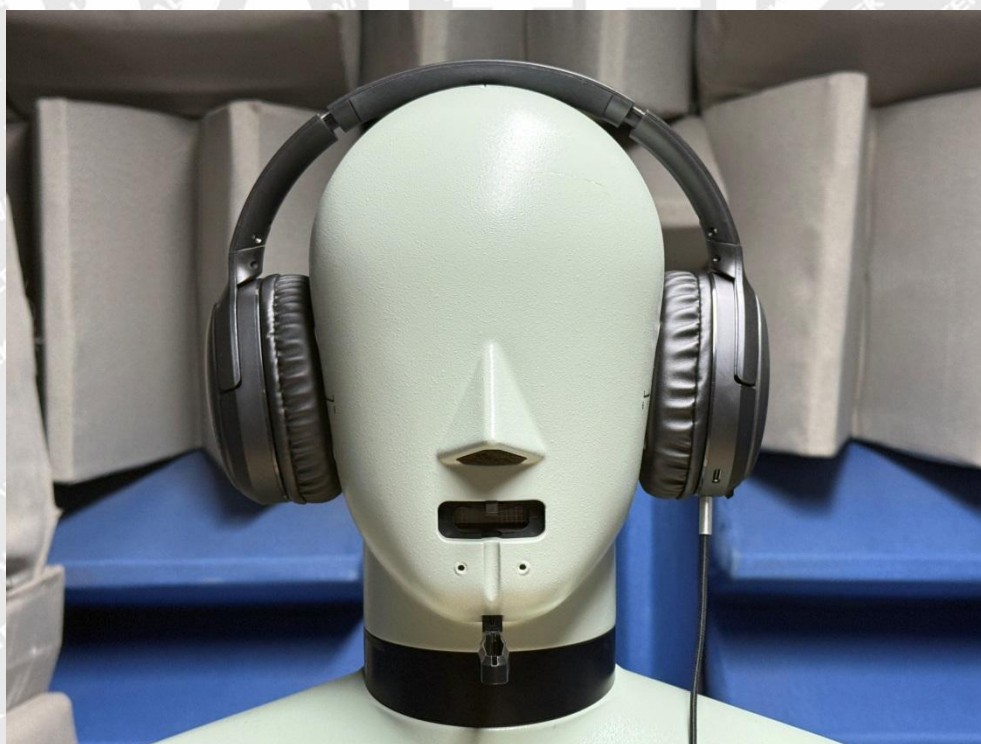


Photo 6

===== End of Report =====