

EMC Test Report

Report No.: AGC05443250626EE01

PRODUCT DESIGNATION: Cable with LED display

BRAND NAME : N/A

MODEL NAME : MO2676

APPLICANT: MID OCEAN BRANDS B.V.

DATE OF ISSUE : Jun. 24, 2025

STANDARD(S) : EN 55032:2015/A1:2020 EN 55035:2017/A11:2020

REPORT VERSION: V1.0

Attestation of Global Configuration (Shenzhen) Co., Ltd



Page 2 of 34

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 24, 2025	Valid	Initial release



Table of contents

1. General information	5
2. Description of Test Configuration	6
2.1. Technical Description of Product	6
2.2. Description of Support Equipment	6
2.3. Description of Test Modes	7
3. Summary of Measurement Results and Uncertainty	8
3.1. Test Specifications	8
3.2. Description of Measurement Results	8
3.3. Description of Measurement Uncertainty	. 10
4. Test Facility	11
5. Measurement of Radiated Emissions at Frequencies up to 1 GHz	. 12
5.1. Requirements	. 12
5.2. Block Diagram of Test Setup	. 12
5.3. Equipment Details	. 13
5.4. Configuration of the EUT and method of measurement	. 13
5.5. Test Summary	. 14
6. Measurement of Radiated Emissions at Frequencies Above 1 GHz	. 16
6.1. Requirements	. 16
6.2. Block Diagram of Test Setup	. 16
6.3. Equipment Details	. 17
6.4. Configuration of the EUT and method of measurement	. 17
6.5. Test Summary	. 18
7. Measurement of Electrostatic discharge	. 20
7.1. Requirements	. 20
7.2. Block Diagram of Test Setup	. 20
7.3. Equipment Details	. 21
7.4. Configuration of the EUT and method of measurement	. 21
7.5. Test Summary	. 22
8. Measurement of Radio-Frequency Electromagnetic Field	23
8.1. Requirements	23
8.2. Block Diagram of Test Setup	. 24
8.3. Equipment Details	25
8.4. Configuration of the EUT and method of measurement	. 25
8.5. Test Summary	


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Report No.: AGC05443250626EE01 Page 4 of 34

__





1. General information

1. Ocheral information		
Applicant	MID OCEAN BRANDS B.V.	
Address	Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.	
Manufacturer	MID OCEAN BRANDS B.V.	
Address	Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.	
Factory	MID OCEAN BRANDS B.V.	
Address	Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.	
Product Designation	Cable with LED display	
Brand Name	N/A	
Test Model	MO2676	
Series Model(s)	N/A	
Difference Description	N/A	
Deviation from Standard	No any deviation from the test method	
Date of receipt of test item	Jun. 12, 2025	
Date of Test	Jun. 12, 2025 to Jun. 24, 2025	
Test Result	Pass	
Test Report Form No AGCER-EMC-GEN-V1		
Note: The test results of the	is report relate only to the tested sample identified in this report.	

Prepared By	Janel Xie	
	Jasiel Xie (Project Engineer)	Jun. 24, 2025
Reviewed By	Jack Gai	
	Jack Gui (Reviewer)	Jun. 24, 2025
Approved By	Angole Li	
	Angela Li (Authorized Officer)	Jun. 24, 2025




Page 6 of 34

2. Description of Test Configuration

2.1. Technical Description of Product

Categorization of Equipment	Class B equipment
Test arrangements of EUT	Table-top
Hardware Version	N/A
Software Version	N/A
Highest Internal Frequency	Greater than 108MHz
EUT Input Rating	DC 20V 5W
Adapter Information	N/A
Battery Information	N/A

Connection Diagram of Host System

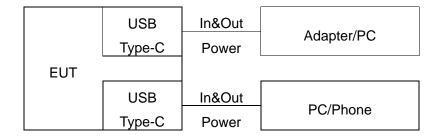

I/O Port Information (⊠Applicable ☐Not Applicable)

Port Type	Input/Output	Number	Cable Description
USB Type-C	In	2	1m unshielded

2.2. Description of Support Equipment

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Smartphone	Xiaomi	MI 10			
Notebook PC	Redmi	XMA2002-AB			
Adapter	Xiaomi	MDY-16-EA			



Page 7 of 34

2.3. Description of Test Modes

No.	Test Mode Description
1	Data transmission mode
2	Charging mode



Page 8 of 34

3. Summary of Measurement Results and Uncertainty

3.1. Test Specifications

EN 55032:2015/A1:2020	Electromagnetic compatibility of multimedia equipment - Emission requirements
EN 55035:2017/A11:2020	Electromagnetic compatibility of multimedia equipment - Immunity requirements

3.2. Description of Measurement Results

Test items	Test Standard(s)	Verdict
Radiated emissions at frequencies up to 1 GHz	EN 55032	Pass
Radiated emissions at frequencies above 1 GHz	EN 55032	Pass
Electrostatic discharge	IEC 61000-4-2 a	Pass
Radio-frequency electromagnetic field	IEC 61000-4-3 a	Pass

Note:

a. The applicable versions of the basic standards are defined in the standard which listed in the test specification.



Page 9 of 34

Performance table

Performance Criteria for Immunity				
Performance criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.			
Performance criterion B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.			
Performance criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.			



Page 10 of 34

3.3. Description of Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Radiated emissions at frequencies up to 1 GHz	Uc = ±3.9 dB
Radiated emissions at frequencies above 1 GHz	$Uc = \pm 4.9 \text{ dB}$



Page 11 of 34

4. Test Facility

Laboratory name: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Laboratory Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laborat ories (CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the Electrical field.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

CAB identifier: CN0063

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

VCCI Membership No.: 4112

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered in accordance with VCCI Council Rules.

VCCI Registration No. C-20098 for conducted emissions at AC main power ports

VCCI Registration No. T-20102 for conducted emissions at telecommunication ports

VCCI Registration No. R-20136 for radiated emissions below 1GHz

VCCI Registration No. G-20132 for radiated emissions above 1GHz



Page 12 of 34

5. Measurement of Radiated Emissions at Frequencies up to 1 GHz


5.1. Requirements

Requirements for radiated emissions at frequencies up to 1 GHz at 3m distance

Test facility	Detector type/ bandwidth	Frequency Range (MHz)	Limits dB(µV/m)	Measurement specifications
040	Quasi-peak/	30 to 230	40	Instrumentation: CISPR 16-1-1, Clauses 4, 5 Antennas: CISPR 16-1-4, Clause 4.5
SAC	120kHz	230 to 1000	47	Test Site: CISPR 16-1-4, Clause 6 Method: CISPR 16-2-3, Clause 7.6

Note:

5.2. Block Diagram of Test Setup

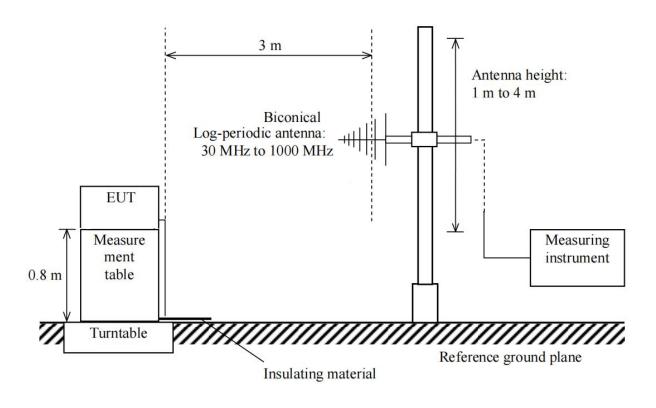

^{1.} The lower limit shall apply at the transition frequency.



Page 13 of 34

5.3. Equipment Details

Measuring Instruments


Instruments No.	Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
AGC-EM-E046	Test Receiver	R&S	ESCI	100096	2025-01-14	2026-01-13
AGC-EM-E001	Antenna	SCHWARZBECK	VULB9168	D69250	2025-03-14	2027-03-13
AGC-EM-A138	Attenuator	East sheep	LM-XX-6-5W	N/A	2025-05-16	2027-05-15

Measuring Software

Software No.	Software Name	Manufacturer	Details
AGC-EM-S003	EZ-EMC	FARA	For EMC Measurement, Version RA-03A

5.4. Configuration of the EUT and method of measurement


- a. The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- b. Support equipment, if needed, was placed as per CISPR 16-2-3.
- c. All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-3.
- d. The maximum receiving level of radiated emissions from the EUT was measured while the turntable was rotated from 0° to 360° and the antenna height was scanned between 1 m and 4 m. The cables were laid out to attain the maximum level of radiated emissions.
- e. The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- f. Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- g. A radiated emission is calculated by the following equation:
 - Measurement Level dB(μV/m) = Receiver reading dB(μV) + Factor(dB/m)
 - Factor(dB/m) = Antenna Factor(dB/m) + Cable Loss(dB)
 - Margin= Limit-Level







5.5. Test Summary


Test Engineer	Alex Yang	Temperature	21.5 ℃
Test Date	2025-06-17	Air Pressure	985 Mbar
Worst Mode	Mode 1	Relative Humidity	52.3 %
Verdict	Pass		

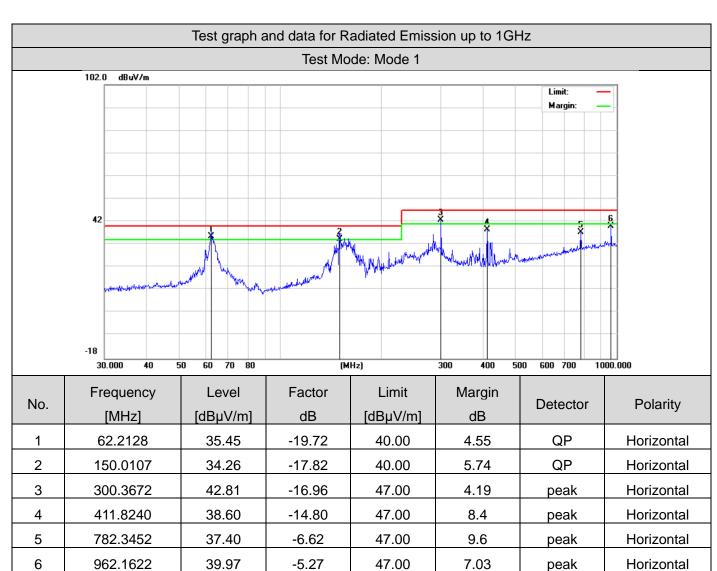





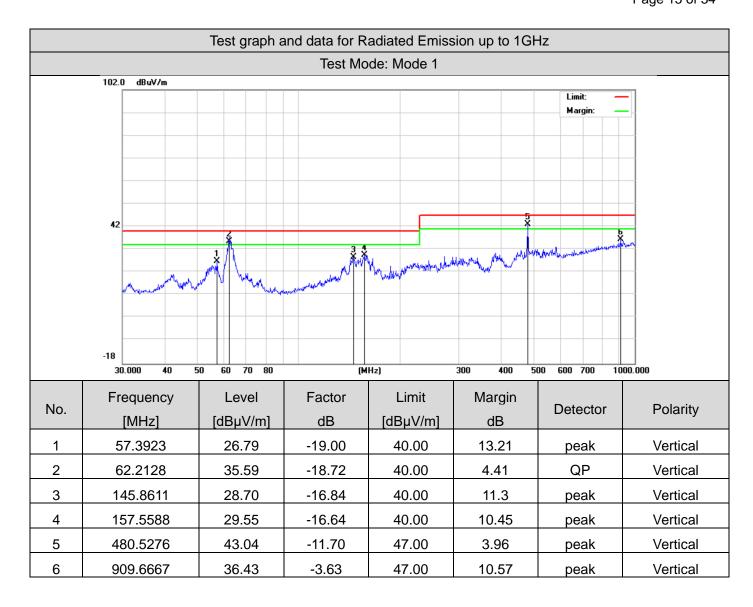






6. Measurement of Radiated Emissions at Frequencies Above 1 GHz

6.1. Requirements

Requirements for radiated emissions at frequencies above 1 GHz at 3m distance

Test facility	Detector type/ bandwidth	Frequency Range (MHz)	Limits dB(µV/m)	Measurement specifications
lacility	Dariuwiutii	Range (MITZ)	αΒ(μν/ιιι)	
	Peak/ 1MHz	1000 to 6000	74	Instrumentation: CISPR 16-1-1, Clauses 4, 6, 7 Antennas: CISPR 16-1-4, Clause 4.6
FSOATS	Average/ 1MHz	1000 to 6000	54	Test Site: CISPR 16-1-4, Clause 7
	TIVITZ			Method: CISPR 16-2-3, Clause 7.6

6.2. Block Diagram of Test Setup

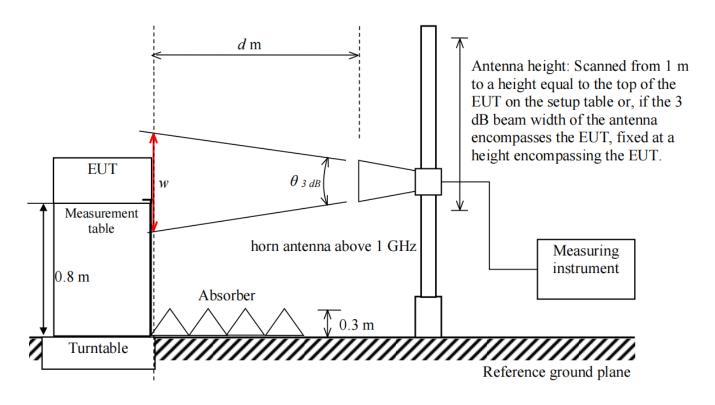



Page 17 of 34

6.3. Equipment Details

Measuring Instruments


Instruments No.	Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
AGC-EM-E061	Signal Analyzer	Keysight	N9010A	MY53470504	2025-05-08	2026-05-07
AGC-EM-E102	Antenna	ETS	3117	00154520	2025-05-18	2026-05-17
AGC-EM-E146	Preamplifier	ETS	3117PA	00246148	2024-07-24	2026-07-23

Measuring Software

Software No.	Software Name	Manufacturer	Details
AGC-EM-S004	TS+[JS32-RE]	Tonscend	For EMC Measurement, Version 4.0.0.0

6.4. Configuration of the EUT and method of measurement


- a. The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- b. Support equipment, if needed, was placed as per CISPR 16-2-3.
- c. All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-3.
- d. The maximum receiving level of radiated emissions from the EUT was measured while the turntable was rotated from 0° to 360° and the antenna height scanned from 1 m to a height equal to the top of the EUT on the setup table or, if the 3 dB beam width of the antenna encompasses the EUT, fixed at a height encompassing the EUT. The cables were laid out to attain the maximum level of radiated emissions.
- e. The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- f. Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- g. A radiated emission is calculated by the following equation:
 - Measurement Level $dB(\mu V/m) = Receiver reading dB(\mu V) + Factor(dB/m)$
 - Factor(dB/m) = Antenna Factor(dB/m) + Cable Loss(dB) Amplifier Gain(dB)
 - Margin= Limit-Level






6.5. Test Summary


Test Engineer	Alex Yang	Temperature	21.5 ℃
Test Date	2025-06-17	Air Pressure	985 Mbar
Worst Mode	Mode 1	Relative Humidity	52.3 %
Verdict	Pass		

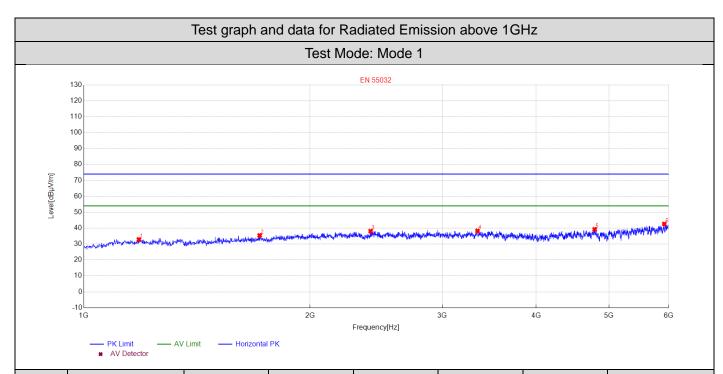

No.	Frequency	Level	Factor	Limit	Margin	Detector	Polarity
INO.	[MHz]	[dBµV/m]	dB	[dBµV/m]	dB	Detector	Folanty
1	1184.036807	32.90	-18.12	74.00	41.10	peak	Horizontal
2	1714.142829	35.41	-16.27	74.00	38.59	peak	Horizontal
3	2408.281656	38.13	-12.89	74.00	35.87	peak	Horizontal
4	3341.468294	38.26	-11.41	74.00	35.74	peak	Horizontal
5	4784.756951	39.24	-9.26	74.00	34.76	peak	Horizontal
6	5922.984597	42.60	-5.95	74.00	31.40	peak	Horizontal





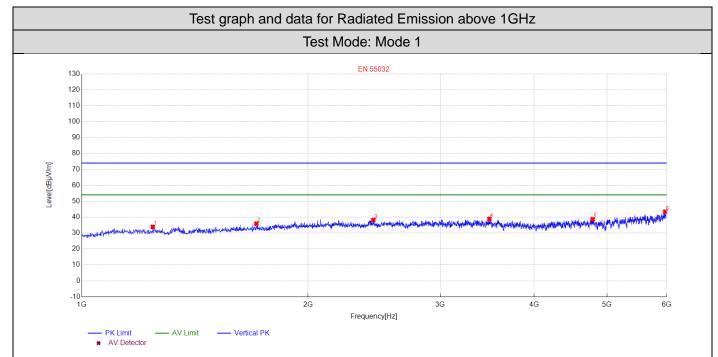

No.	Frequency [MHz]	Level [dBµV/m]	Factor dB	Limit [dBµV/m]	Margin dB	Detector	Polarity
1	1243.04861	33.92	-18.06	74.00	40.08	peak	Vertical
2	1707.141428	35.88	-16.33	74.00	38.12	peak	Vertical
3	2443.288658	38.21	-12.77	74.00	35.79	peak	Vertical
4	3486.4973	38.91	-11.14	74.00	35.09	peak	Vertical
5	4784.756951	38.65	-9.26	74.00	35.35	peak	Vertical
6	5974.994999	43.44	-5.73	74.00	30.56	peak	Vertical




7. Measurement of Electrostatic discharge

7.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-2
Test Level	±8.0 kV (Air Discharge) ±4.0 kV (Contact Discharge) ±4.0 kV (Indirect Discharge)
Required Performance Criterion	В
Time Between Each Discharge:	1 second
Number of Discharge for Each Applied Voltage	10

7.2. Block Diagram of Test Setup

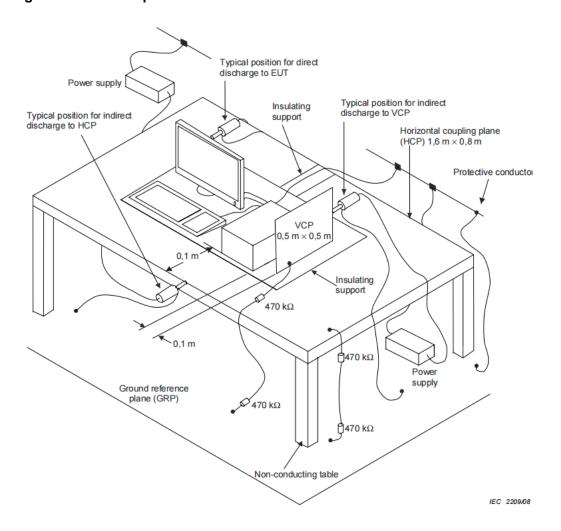



Page 21 of 34

7.3. Equipment Details

Measuring Instruments

Instruments No.	Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
AGC-EM-E013	ESD Simulator	Schaffner	NSG 438	782	2024-11-12	2025-11-11

Measuring Software

Software No.	Software Name	Manufacturer	Details

7.4. Configuration of the EUT and method of measurement

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were completed.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m×0.5m) was placed vertically to and 0.1 meters from the EUT.
- i. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.



Page 22 of 34

7.5. Test Summary


Test Engineer	Ikun Yu	Temperature	23.2 ℃
Test Date	2025-06-19	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2	Relative Humidity	53.6 %
Verdict	Pass		

Voltage	Voltage Coupling		Performance
±4kV	Contact Discharge	N/A	N/A
±2KV, ±4kV, ±8kV	Air Discharge	No degradation of performance	А
±4kV	Indirect Discharge HCP	No degradation of performance	A
±4kV	Indirect Discharge VCP	No degradation of performance	A

Note: No Contact Discharge

Discharge Point:

Blue line: Air Discharge

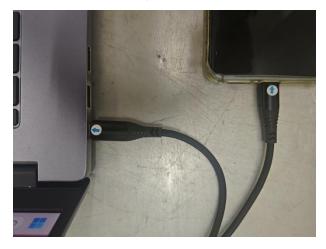



Page 23 of 34


8. Measurement of Radio-Frequency Electromagnetic Field

8.1. Requirements

Port	Enclosure		
Basic Standard	IEC 61000-4-3		
Test Level	Swept test: 3V/m with 80% AM. 1kHz Modulation at 80 to 1000MHz Spot test (Frequency (±1 %)): 3V/m with 80% AM. 1kHz Modulation at 1800, 2600, 3500, 5000MHz		
Required Performance Criterion	A		
Antenna polarization	Vertical and Horizontal		
Step size increment ^a	1%		
Dwell time ^b	≤5 seconds		
Test Distance	3m		
EUT position facing antenna	Front side, back side, left side and right side		


Notes:

- a. Recognizing that a 1% step size is preferred, the frequency range can be swept incrementally with a step size not exceeding 4% of the previous frequency with a test level of twice the value of the specified test level in order to reduce the testing time for equipment requiring testing in multiple configurations and/or long cycle times.
- b. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan. The time to exercise the EUT is not interpreted as a total time of a program or a cycle but related to the reaction time in case of failure of the EUT.





8.2. Block Diagram of Test Setup

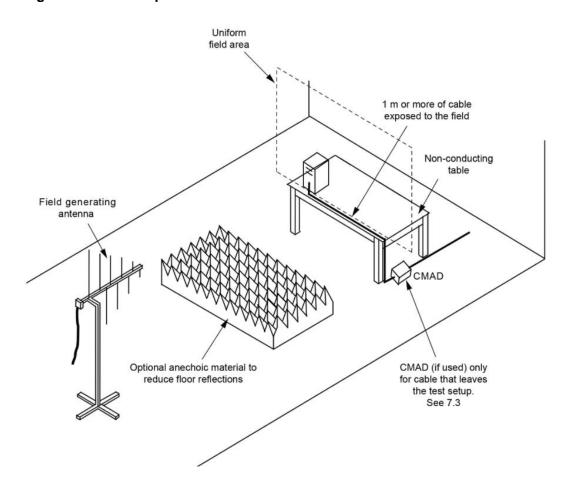



Page 25 of 34

8.3. Equipment Details

Measuring Instruments

Instruments No.	Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
AGC-EM-E115	Signal Generator	Aglient	N5182A	MY49060745	2025-03-07	2026-03-06
AGC-EM-E041	Directional Couple	Werlatonee	C6026-10	99482	2024-02-01	2026-01-31
AGC-EM-E040	Directional Couple	Werlatonee	C5571-10	99463	2024-02-01	2026-01-31
AGC-EM-E035	Power Probe	R&S	URV5-Z4	100124	2025-03-24	2027-03-23
AGC-EM-E005	Power Meter	R&S	NRVD	8323781027	2025-03-24	2027-03-23
AGC-EM-E016	Power Amplifier	KALMUS	7100LC	04-02/17-06-001	2024-07-24	2025-07-23
AGC-EM-E160	Power Amplifier	TESEQ	CBA3G-100	T43913	2025-05-21	2026-05-20
AGC-EM-E080	Power Amplifier	Rflight	NTWPA-2560100	17063183	2024-07-24	2025-07-23
AGC-EM-E029	Double-Ridged Waveguide Horn Antenna	ETS-LINDGREN	3117	00034609	2025-03-27	2026-03-26
AGC-EM-E028	Wideband Antenna	ETS-LINDGREN	3142C	00060447	N/A	N/A

Measuring Software

Software No.	Software Name	Manufacturer	Details
AGC-EM-S006	TS+[JS35-RS]	Tonscend	For EMC Measurement, Version 2.0.1.8

8.4. Configuration of the EUT and method of measurement

- a. The Equipment Under Test (EUT) was positioned within the Uniform Field Area (UFA) on a supporting table, ensuring a 3-meter separation from the transmitting antenna. This setup aligns with the calibrated square area, guaranteeing field uniformity during testing. The supporting units were strategically located outside the UFA to avoid any potential interference. Nonetheless, the cables connected to the EUT were intentionally exposed to the precisely calibrated field within the UFA.
- b. Before testing, it will verify the proper operation of the test equipment/system. This verification will involve measuring the field strength at one point within the Uniform Field Area (UFA) at various frequencies.
- c. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- d. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.



Page 26 of 34

8.5. Test Summary

Test Engineer	Alex Yang	Temperature	21.5 ℃
Test Date	2025-06-17	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2	Relative Humidity	52.3 %
Verdict	Pass		

Swept test:


Frequency	Exposed Side	Field Strength (V/m)	Observation	Performance
80MHz to 6GHz	Front	3V/m (rms)	No degradation of performance	A
80MHz to 6GHz	Left	3V/m (rms)	No degradation of performance	A
80MHz to 6GHz	Rear	3V/m (rms)	No degradation of performance	А
80MHz to 6GHz	Right	3V/m (rms)	No degradation of performance	А

Spot test (Frequency (±1 %)):


Frequency	Exposed Field Strength		Observation	Performance
rrequericy	Side	(V/m)	Observation	renomance
1800, 2600, 3500, 5000MHz	Front	3V/m (rms)	No degradation of performance	А
1800, 2600, 3500, 5000MHz	Left	3V/m (rms)	No degradation of performance	А
1800, 2600, 3500, 5000MHz	Rear	3V/m (rms)	No degradation of performance	А
1800, 2600, 3500, 5000MHz	Right	3V/m (rms)	No degradation of performance	Α



9. Photographs of Test Setup

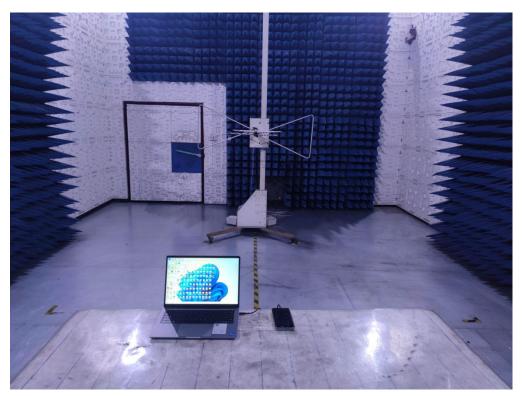


Radiated emissions at frequencies up to 1 GHz

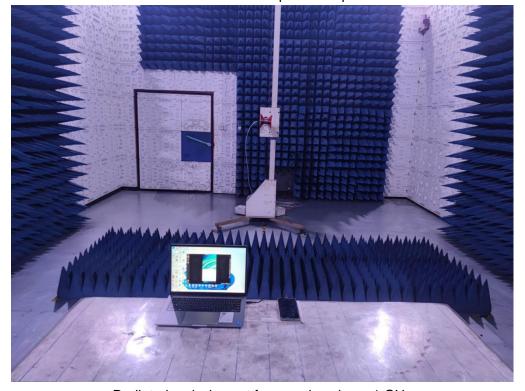


Radiated emissions at frequencies above 1 GHz




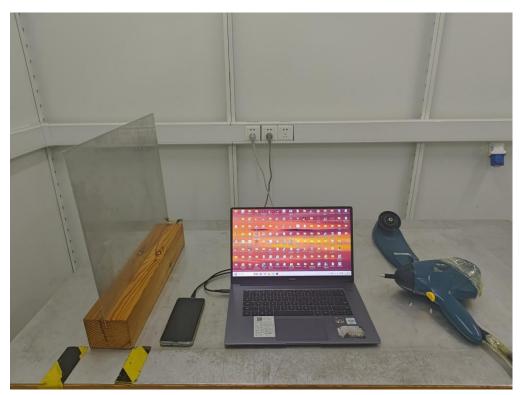


Electrostatic discharge

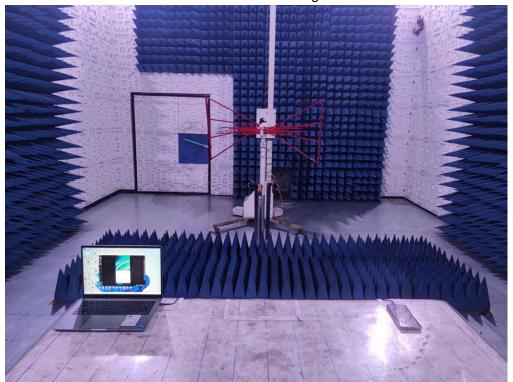

Radio-frequency electromagnetic field up to 1 GHz





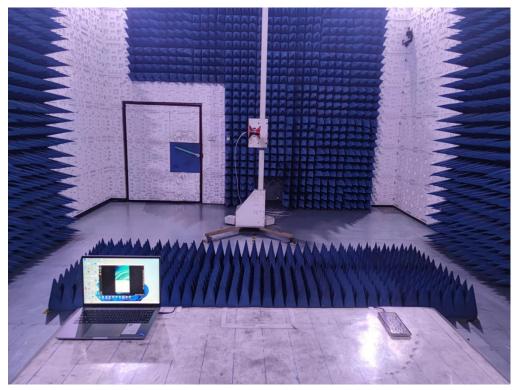

Radio-frequency electromagnetic field above 1 GHz



10. Photographs of EUT



Top view of EUT



Bottom view of EUT





Front view of EUT



Back view of EUT







Left view of EUT




Right view of EUT





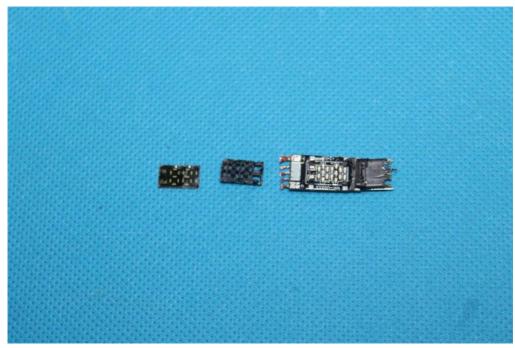

Internal view-1 of EUT

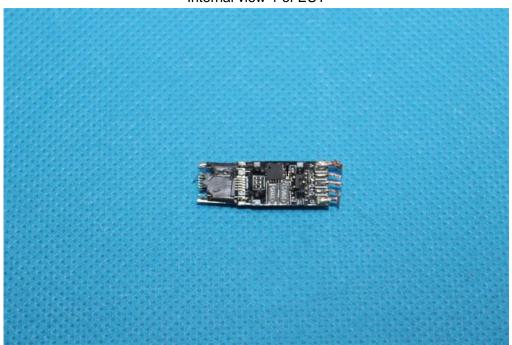

Internal view-2 of EUT



Page 34 of 34

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders. 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----End of Report----